

A person wearing a grey camouflage jacket and tan pants is holding a black rifle. The rifle is equipped with a magnifier and a dot sight. The background is a blurred outdoor setting with dry grass and a blue sky.

DOT SIGHTS & MAGNIFIERS

CONFIDENCE SQUARED AWAY.

Effective targeting solutions viable for handguns, shotguns, and rifles with a wide selection of MRDS (Micro Reflex Dot Sights) and other closed-emitter dot sights to choose from. Follow through with confidence as you transition between targets and find what suits you as a shooter with different reticle options, adaptive bases, height profiles, and more. Looking to touch our father? Pair one with our three times flip-to-side magnifier.



JUMP TO A SERIES

UTG® ACCU-SYNC® DOT SIGHTS [NEW]	064
DS2521R for Mini ACOG® Footprint	065
DS2018R for Mini ACOG® Footprint	065
UTG® OP3 MICRO MRDS	066
Mini Micro MRDS for SHIELD RMSC Footprint	066
MRDS/SL/SLS for DOCTER® Footprint	067
MRDS/SLS for RMR® Footprint	067
UTG® 3X FLIP-TO-SIDE MAGNIFIER	068
UTG® ITA DOT SIGHTS	068

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]





ACCURACY SYNCHRONIZED ACCU-SYNC®

ACCU-SYNC® DOT SIGHTS

UTG® ACCU-SYNC® dot sights come in a compact and subcompact size and feature a red illuminated 3 MOA dot with 8 manually adjusted brightness intensity settings to choose from. Illumination memory conveniently gets users right back to the last brightness setting used upon activation. Fully sealed, ACCU-SYNC® dot sights are IPX7 waterproof rated and constructed from matte black anodized 6061-T6 aluminum. Optimized for low power consumption and powered by a single CR2032 battery, a 30,000+ hour battery life (at middle brightness) comes standard.

The mounting base uses the common mini ACOG® footprint and is configured for a lower 1/3 co-witness out of the box. Removing the included riser drops the height down to that of a low mount providing users two commonly used height profiles for different firearm applications. In addition, the base features squared recoil stops and our QR (quick release) mount, making for a quick installation and removal, reliable return to zero, and is compatible with Picatinny rails with widths that may even be out of spec. Tool-free tension adjustment is locked in place via a gear and spring-loaded locking lever interface, allowing users to set it once and forget it.

QUICK TO ACQUIRE

Red 3 MOA Dot with 8 Brightness Settings and 30,000+ Hours Battery Life



SHOOTER CONFIGURABLE

Includes Low Mount & Lower 1/3 Riser and is Mini ACOG Footprint Compatible



ACCU-SYNC® QR

Low Profile Quick Release (QR) Mount with Tool-free Tension Adjustment



RELIABLE CONSTRUCTION

IPX7 Waterproof Rated, Precision Machined from Matte Black 6061-T6 Aluminum with Impact Resistant Tempered Glass Lens



ACCU-SYNC® 2018R & 2521R DOT SIGHTS



ACCU-SYNC® 2018R [NEW]
Manual Brightness
Mini ACOG® Footprint / Red 3 MOA / OP-DS2018R



ACCU-SYNC® 2521R
Manual Brightness
Mini ACOG® Footprint / Red 3 MOA / OP-DS2521R



ACCU-SYNC® 2018R & 2521R DOT SIGHTS

- » Precision Machined from 6061-T6 Aluminum and Finished in a Matte Black Anodization
- » Wide Field of View Lens Diameter
- » Impact Resistant Tempered Glass Lens
- » 3 MOA Red Dot with 8 Brightness Settings
- » 30,000+ Hours Battery Life at Middle Brightness Setting
- » Snag-free Flush Turrets with Crisp 1 MOA Per Click Adjustment at 100 Yards
- » IPX7 Waterproof Rated
- » Low Profile Quick Release (QR) Mini ACOG® Mount with Lower 1/3 Co-witness Riser Included

	OP-DS2018R	OP-DS2521R
Lens Diameter	0.75" / 19 mm	0.79" / 20 mm
Reticle / Illumination	Red 3 MOA Dot	Red 3 MOA Dot
Illumination Mode	Manual, 8 Settings	Manual, 8 Settings
Adjustment	1 MOA Per Click	1 MOA Per Click
Material	Anodized AL6061	Anodized AL6061
Battery Type	CR2032 3V	CR2032 3V
Battery Life	30,000+ hrs	30,000+ hrs
Mount Footprint	Mini ACOG®, with Lower 1/3 Co-witness Riser	
Length x Width	2.24" X 1.64"	2.66" X 1.66"
Weight (w/Battery)	5.4 oz	6.1 oz



OP3 MICRO MRDS



OP3 MINI MICRO

Constant-on Automatic Brightness

SHIELD RMSC Footprint / Red 3 MOA / OT-RDM16R

OP3 MINI MICRO MRDS

- » High Clarity Coated Glass Lens Housed within a Precision Machined Matte Black Anodized 6061-T6 Aluminum Body
- » IPX7 Waterproof Rated
- » Lower 1/3 Co-witness with Most Standard Height Iron Sights
- » Integral Rear Backup Iron Sight Milled into Body
- » Protective Optic Cover Included
- » Out-of-the-box Compatible with SIG P365X/XL, GLOCK 43X/48 MOS, WALTHER PPS M2 RMSC, SPRINGFIELD ARMORY HELLCAT OSP, RUGER MAX-9, S&W PERFORMANCE CENTER M&P SHIELD M2.0, and Most Other Optics-Ready Pistol Platforms

	OT-RDM16R
Lens Diameter	0.85" X 0.59"
Reticle / Illumination	Red 3 MOA Dot
Illumination Mode	Automatic, Constant-on
Material	Anodized AL6061
Battery Type	CR2032
Battery Life	30,000+ hrs
Mount Footprint	SHIELD RMSC
Length x Width	1.60" X 0.95"
Weight (w/Battery)	0.70 oz



OP3 MICRO
Manual Brightness

DOCTER® Footprint / **Red 4 MOA** / OP-RDM20R
DOCTER® Footprint / **Green 4 MOA** / OP-RDM20G
RMR® Footprint / **Red 4 MOA** / OP-RMR20R



OP3 MICRO SL

Side Loading Battery / Manual Brightness

DOCTER® Footprint / **Red 4 MOA** / OP-RDM20CT



OP3 MICRO SLS

Side Loading Battery / Manual & Auto Sensing Brightness

 DOCTER® Footprint / **Red 4 MOA** / OP-RDM20CTS
RMR® Footprint / **Red 4 MOA** / OP-RMR20CTS

OP3 MICRO MRDS

- » IPX7 Waterproof Rated
- » Coated Wide 23mm FOV Glass Lens
- » Co-witnesses with Most Suppressor Height Iron Sights
- » Tertiary Aiming Point Laser Engraved on Rear Face of Housing

	OP-RDM20R	OP-RDM20G	OP-RMR20R	OP-RDM20CT	OP-RDM20CTS	OP-RMR20CTS
Lens Diameter	0.89" X 0.68"	0.89" X 0.68"	0.89" X 0.68"	0.89" X 0.68"	0.89" X 0.68"	0.89" X 0.68"
Reticle / Illumination	Red 4 MOA Dot	Green 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot
Illumination Mode	Manual	Manual	Manual	Manual	Manual / Automatic	Manual / Automatic
Adjustment	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click
Material	Anodized AL6061	Anodized AL6061	Anodized AL6061	Anodized AL6061	Anodized AL6061	Anodized AL6061
Battery Type	CR2032 3V	CR2032 3V	CR2032 3V	CR1632 3V	CR1632 3V	CR1632 3V
Battery Life	55,000+ hrs	20,000+ hrs	55,000+ hrs	15,000+ hrs	15,000+ hrs	15,000+ hrs
Mount Footprint	Docter®	Docter®	RMR®	Docter®	Docter®	RMR®
Length x Width	1.90" X 1.14"	1.90" X 1.14"	1.78" X 1.14"	1.90" X 1.14"	1.90" X 1.14"	1.78" X 1.14"
Weight (w/Battery)	1.2 oz	1.2 oz	1.1 oz	1.2 oz	1.2 oz	1.2 oz



ITA DOT SIGHTS & MAGNIFIER




3X QD FLIP-TO-SIDE MAGNIFIER

- » Windage/Elevation Adjustability for Optimum View Centering
- » 42mm Center Height for Most Common Dot Sight Combination
- » Perfect Match with: SCP-DS3840W, SCP-DS3039W, SCP-DS3840TDQ
- » Match with 0.60" Riser: SCP-RD40RGW-A
- » Match with 0.75" Riser: SCP-RG40SDQ, SCP-RG40CDQ
- » US PAT. 8397421, US PAT. D672839, EU PAT. EP1984576-0001

Integral QD Mount / SCP-MF3WEQS



» Bidirectional Offset Mount Included



6.0" ITA DOT SIGHT

- » Built on TRUE STRENGTH® Platform
- » Unlimited Eye Relief and Intuitive, Quick-to-Acquire Red/Green T-dot Reticle for Swift Execution of T-Zone and Center Mass Hits
- » Premium Zero Lockable and Zero Resettable Target Turrets with Most Consistent, Precise and Reliable 1/2 MOA per Click Adjustment and Zero Hold Capability
- » 42mm Center Height for 1/3 Co-witness of Front and Rear Iron Sights
- » US PAT. 8397421

RG T-Dot / Bidirectional QD Mount / SCP-TDQDQ






» Offset Riser Applications



4.2" ITA DOT SIGHTS

» US PAT. 8397421

- RG 4 MOA Single Dot / Adjustable Riser / SCP-DS3840W
- RG T-Dot / Adjustable Riser / SCP-DS3840TDQ

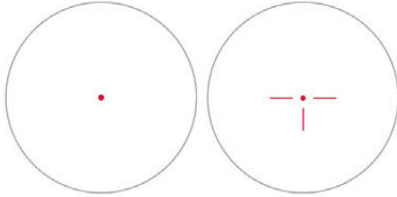


» Offset Riser Applications



3.9" ITA DOT SIGHT

» US PAT. 8397421


- RG 4 MOA Single Dot / Adjustable Riser / SCP-DS3039W



3.8" ITA DOT SIGHTS

» US PAT. 8397421


- RG 4 MOA Single Dot / Integral Mount / SCP-RD40RGW-A
- RG Circle Dot / Integral QD Mount / SCP-RG40CDQ

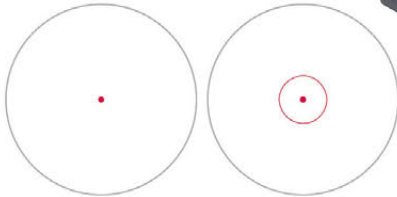

2.6" ITA DOT SIGHT

» US PAT. 8397421

- RG 4 MOA Single Dot / Integral QD Mount / SCP-DS3026W



	SCP-MF3WEQS	SCP-TDQ	SCP-DS3840W	SCP-DS3840TDQ	SCP-DS3039W	SCP-RD40RGW-A	SCP-RG40CDQ	SCP-DS3026W
Reticle / Illumination	N/A	T-DOT / RG	Single Dot / RG	T-DOT / RG	Single Dot / RG	Single Dot / RG	Circle Dot / RG	Single Dot / RG
Magnification	3X	1X	1X	1X	1X	1X	1X	1X
Main Tube Diameter	44 mm	38 mm	38 mm	38 mm	30 mm	38 mm	38 mm	30 mm
Objective Diameter	25 mm	39 mm	32 mm	32 mm	26 mm	30 mm	30 mm	21 mm
FOV @ 100 Yards	45'	85'	103'	103'	75'	95'	95'	95'
Eye Relief	2"	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
Exit Pupil	8.7 mm	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
Click Value	N/A	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Center Height	42 mm	42 mm	32 mm (42 mm w/riser)	32mm (42mm w/riser)	30 mm (40 mm w/riser)	25.5 mm	25.5 mm	25 mm
Length	4"	6"	4.2"	4.2"	3.9"	3.8"	3.8"	2.6"
Weight	11.82 oz	13.1 oz	8.7 oz	8.7 oz	8.3 oz	9.4 oz	8.4 oz	4.9 oz
Battery Type	N/A	CR1620 3V	CR1620 3V	CR1620 3V	CR1620 3V	CR2032 3V	CR2032 3V	CR1620 3V