

FLASHLIGHTS & LASERS



IDENTIFY WITH CERTAINTY.

It is critical to positively identify your target and what is behind it and within the immediate area. Assess and proceed accordingly with mounted and handheld solutions or ideally both for the most uncertain of times and situations. Two is one and one is none.

JUMP TO A SERIES

LASERS

160

- BULLDOT® Compact Green Laser
- Compact Green Pistol Laser
- Compact Red Laser
- Sub-compact Red Laser

FLASHLIGHT & LASER ACCESSORIES

161

WEAPON LIGHTS

162

- Sub-compact Pistol Light
- Compact Pistol Light
- Quick Detach Grip Light
- Polymer Grip Light

2-IN-1 LASER/FLASHLIGHT COMBOS

163

- Light/Red Laser Combo
- Light/Green Laser Combo
- Sub-compact Light/Red Laser Combo

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]






LASERS



BULLDOT®

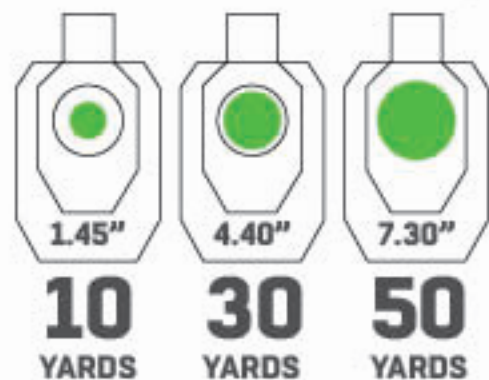

BULLDOT® COMPACT GREEN LASER

- » Expanding Beam Diameter Increases from 1.45" up to 7.3" at 50 Yards for the Eyes to Pick up Faster at Farther Distances
- » Matte Black Anodized Aluminum Construction
- » Constant On/Off Push Button Tail Cap and Pressure Switch Included

 / SCP-LS289S

	SCP-LS289S
Mount Type	Low Profile Picatinny Mount
Laser Range	328.1 yds (300 m)
Beam Diameter	1.45" (37 mm) @ 10 yds (9.1 m) 4.40" (112 mm) @ 30 yds (27.4 m) 7.3" (185 mm) @ 50 yds (45.7 m)
Dimensions	3.37" x 1.89" x 1.34" (85.5 mm x 48 mm x 34 mm)
Weight with Battery	4.35 oz (123 g)
Battery	CR2 x 1



COMPACT GREEN PISTOL LASER

- » Fits Flush on Most Compact Pistols
- » Class 3R Bright Green Laser
- » Ambidextrous Momentary/Constant On/Off Switches
- » Matte Black Anodized Aluminum Construction
- » Low Profile Picatinny Mount and Side Plate


/ SCP-LS279S-A



COMPACT RED LASER

- » Precise Windage / Elevation Adjustment
- » Powerful Long Range Beam with Pinpoint Accuracy
- » Pressure Switch Included
- » Slide-on Picatinny Ring Mount included

/ SCP-LS268

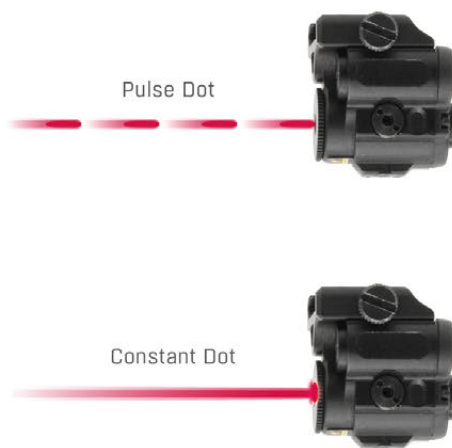

SUB-COMPACT RED LASER

- » Class 3R Bright Red Laser
- » Programmable for Constant or Pulse Dot Beam Operation
- » Matte Black Anodized Aluminum Construction
- » Sub-compact 1.19" Length
- » Low Profile Picatinny Mount and Side Plate

/ SCP-LS200

OPTIONAL ACCESSORIES



PICATINNY OFFSET RING MOUNT

- » Compatible with 27mm, 25.4mm (1"), and 20mm Flashlight Body Diameters with Use of Included Inserts
- » Matte Black Anodized Aluminum Construction

/ RG-FL138



M-LOK® / KEYMOD OFFSET RING MOUNTS

- » Snag-free Melted Contours and Dehorned Corners
- » Matte Black Anodized Aluminum Construction
- » Compatible with 27mm, 25.4mm (1"), and 20mm Body Diameters with Use of Included Inserts

/ RG-FL27MC

/ RG-FL27KC

	SCP-LS279S-A	SCP-LS200	SCP-LS268
Mount Type	Low Profile Picatinny Mount	Low Profile Picatinny Mount	Slide-on Picatinny Ring Mount
Laser Range	546.8 yds (500 m)	546.8 yds (500 m)	546.8 yds (500 m)
Beam Diameter	1.1" (28 mm) @ 16.4 yds (15 m)	1.1" (28 mm) @ 16.4 yds (15 m)	0.6" (16 mm) @ 16.4 yds (15m)
Dimensions	2.38" x 1.18" x 1.15" (60.4 mm x 30 mm x 29.3 mm)	1.19" x 1.27" x 1.28" (30.2 mm x 32.2 mm x 32.5 mm)	2.59" x 0.79" (65.8 mm x 20 mm)
Weight with Battery	2.1 oz (61 g)	1.3 oz (36 g)	1.1 oz (30g)
Battery	1/3N x 1	LR48 (AG5) x 4	LR44 x 4

	RG-FL138	RG-FL27MC	RG-FL27KC
Ring Diameter	Adaptable with Inserts		
No Insert (27 mm)	No Insert		
Insert 2 (25.4 mm)			
Compatible Model	LT-ELEDC01, LT-EL700		
Insert 1 + Insert 2 (20 mm)			



WEAPON LIGHTS



SUB-COMPACT PISTOL LIGHT

- » Fits Flush on Most Compact Pistols
- » Ambidextrous Momentary/Constant On/Off Switches
- » Flood Focus 200 Lumen Beam
- » Matte Black Anodized Aluminum Construction
- » IPX7 Waterproof Rated

■ / LT-ELP120R



COMPACT PISTOL LIGHT

- » Ambidextrous Momentary/Constant On/Off Switches
- » Removable Positional Inserts Increase Pistol Rail Compatibility
- » Flood Focus 400 Lumen Beam
- » Matte Black Anodized Aluminum Construction

■ / LT-ELP123R-A



QUICK DETACH GRIP LIGHT

- » Momentary Constant On/Off Push Button
- » Flood Focus 400 Lumen Beam
- » Matte black Anodized Aluminum Construction
- » Picatinny Quick Detach Lever Lock Mount
- » US PAT. 8397421

■ / MNT-EL228GPQ-A



POLYMER GRIP LIGHT

- » Momentary/Constant On/Off Push Button
- » Left and Right Side Toggled Momentary Only Strobe
- » Flood Focus 400 Lumen Beam, Scalable in Constant-on from 400 to 20 Lumen
- » IPX7 Waterproof Rated
- » Impact Resistant Polymer Construction
- » US PAT. D876572

■ / MT-EL223GX

	LT-ELP120R	LT-ELP123R-A	MNT-EL228GPQ-A	MT-EL223GX
Mount Type	Picatinny	Picatinny	Picatinny QD Lever Lock	Picatinny
Lumen Output	200 Lumen	400 Lumen	400 Lumen	High-400 Lumen Low-20 Lumen
Dimensions	2.98" x 1.12" x 1.13" (75.8 mm x 28.5 mm x 28.7 mm)	3.11" x 1.31" x 1.50" (79 mm x 33.3 mm x 38 mm)	2.80" x 1.77" x 5.34" (71 mm x 45.8 mm x 135.7 mm)	2.13" x 1.38" x 4.09" (54.1 mm x 35.1 mm x 103.9 mm)
Weight (w/Battery)	2.6 oz (73 g)	3.5 oz (100.2 g)	12 oz (340.2 g)	6.6 oz (187.1 g)
Bulb Type	20 mm LED IRB	24 mm LED IRB	26 mm LED IRB	23 mm LED IRB
Focus	Flood	Flood	Wide Angled Flood	Wide Angled Flood
Battery	CR2 x 1	CR2 x 1	CR123A x 2	CR123A x 2
Battery Life	1 hr	1 hr	3 hrs	High - 3 hrs Low - 24 hrs

2-IN-1 LASER/FLASHLIGHT COMBOS



LIGHT/RED LASER COMBO

- » 400 Lumen Flashlight with 3 Hour Runtime and Dual-function Push-button Momentary On/Off and Constant Twist On/Off Activation
- » Class 3R Type Red Laser with Push-button On/Off and 4-point Retention Erector Return Springs for Reliable Zero Hold
- » Adjustable Rotating Laser Bracket Provides 10 Mounting Positions around the Circumference of the Light
- » Patented Quick-detach Lever Lock Picatinny Mount
- » Optional Flashlight and Laser Pressure Switches Included
- » US PAT. 8397421

/ LT-ELP38Q-A

LIGHT/GREEN LASER COMBO

- » 400 Lumen Flashlight with 3 Hour Runtime and Dual-function Push-button Momentary On/Off and Constant Twist On/Off Activation
- » Bright Green Laser with Push-button On/Off and 4-point Retention Erector Return Springs for Reliable Zero Hold
- » Adjustable Rotating Laser Bracket Provides 10 Mounting Positions around the Circumference of the Light
- » Patented Quick-detach Lever Lock Picatinny Mount
- » Optional Flashlight and Laser Pressure Switches Included
- » US PAT. 8397421

/ LT-ELP39Q-A

SUB-COMPACT LIGHT AND RED LASER

- » 120 Lumen Flood Focus Flashlight with Bright Red Laser Powered Off a Single CR2 Battery for a Combined Run Time of 45 Minutes
- » Included Quick-insert Pressure Switch is User Configurable for Simultaneous or Standalone Operation of Light and Laser
- » Integral Weatherproof Plug Replaces Quick-insert Pressure Switch When Not in Use
- » Low Profile Design Mounts Close to Handguard and Bore of Firearm

/ LT-ELP28R

	LT-ELP38Q-A	LT-ELP39Q-A	LT-ELP28R
Mount Type	Picatinny QD Lever Lock	Picatinny QD Lever Lock	Picatinny
Lumen Output	400 Lumen	400 Lumen	120 Lumen
Dimensions	5.12" x 1.92" x 1.27" (130 mm x 48.8 mm x 32.3 mm)	5.35" x 2.24" x 1.28" (136 mm x 56.8 mm x 32.5 mm)	2.04" x 1.97" x 1.69" (51.8 mm x 50 mm x 43 mm)
Weight (w/Battery)	7.3 oz (209 g)	8.6 oz (243 g)	2.9 oz (83 g)
Bulb Type	23 mm LED IRB	23 mm LED IRB	16 mm LED IRB
Focus	Flood	Flood	Flood
Laser Range	546.8 yds (500 m)	546.8 yds (500 m)	164 yds (150 m)
Beam Diameter	0.63" (16 mm) @16.4 yds (15 m)	0.7" (17.8 mm) @16.4 yds (15 m)	1.1" (28 mm) @16.4 yds (15 m)
Flashlight Battery	CR123A x 2	CR123A x 2	CR2 x 1
Flashlight Battery Life	3 hrs	3 hrs	1 hr
Laser Battery	LR44 x 4	CR2 x1	N/A
Laser Battery Life	1.3 hrs	3.3 hrs	45 mins