

OPTIC MOUNTS & RINGS



WHAT IT TAKES TO STAY ZEROED

Staying zeroed. There is more to it than torquing down screws or throwing a lever to the side. Surface interfaces must adhere to strict tolerances, thread engagement must be precise. Mounts must be square and locking lugs must be able to return to zero and manage the recoil. From your traditional hunting rifle to your configuration for civilian defense, our solutions are reliable and durable when it counts.



JUMP TO A SERIES

	UTG PRO® P.O.I.® SCOPE RINGS [NEW]	074
	SCOPE RINGS & MOUNTS	076
	ACCU-SYNC® QR Cantilever Mounts w/ MOA Compensation [NEW]	076
	ACCU-SYNC® Cantilever Mounts	077
	ACCU-SYNC® QR Scope Rings	078
	UTG® Scope Rings & Mounts	079
	UTG PRO®  CLAW MOUNT FOR MP5® & MP5K [NEW]	080
	DRILLED & TAPPED RECEIVER MOUNTS	082
	DOVETAIL-TO-PICATINNY MOUNTS	083
	AK RECEIVER MOUNTS	084
	M1A RECEIVER MOUNT	085
	SHOTGUN SIDE SADDLE MOUNTS	086
	SUPER SLIM PICATINNY RISER MOUNTS	087
	DEDICATED OPTIC MOUNTS	088
	Picatinny Mounts for DOCTER® / RMR®	088
	Picatinny Mounts for AIMPOINT® Micro	088
	Dovetail Mounts for RMR®	089
	Dovetail Mounts for DOCTER®	089

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE
TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)




P[®]PRECISION OPTICS INTERFACE



P.O.I.[®] SCOPE RINGS

UTG PRO[®] 
P.O.I.[®] SCOPE RINGS

- » Proudly Designed and Made in USA
- » Patented P.O.I.[®] Locking Plate Featuring Dual Spring-loaded Guide Rods
- » Picatinny Rings have Square Picatinny Recoil Stop and Dovetail Rings an Additional Threaded Recoil Stop-pin for Secure and Repeatable Zero Hold
- » Top and Bottom Rings Precision-machined from One Piece for Tight Tolerance Inner Diameter
- » Rated for .50 BMG

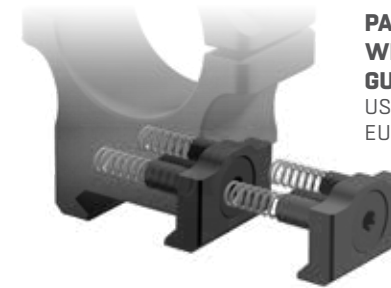

**PATENTED P.O.I LOCKING PLATE
 WITH DUAL SPRING-LOADED
 GUIDE RODS**
 US PAT. D771218
 EU PAT. 002761064-0001



PICATINNY RINGS

34 MM	30 MM	1 IN
Low / RWU013408 [NEW]	Low / RWU013010	Low / RWU012510
Medium / RWU013415	Medium / RWU013015	Medium / RWU012515
High / RWU013420	High / RWU013022	High / RWU012520

DOVETAIL RINGS

30 MM	1 IN
Low / RDU013010	Medium / RDU012515
Medium / RDU013015	High / RDU012520
High / RDU013022	

Picatinny	RWU013408	RWU013415	RWU013420	RWU013010	RWU013015	RWU013022	RWU012510	RWU012515	RWU012520
Dovetail	-	-	-	RDU013010	RDU013015	RDU013022	-	RDU012515	RDU012520
Ring Diameter	34 mm	34 mm	34 mm	30 mm	30 mm	30 mm	1"	1"	1"
Profile	Low	Medium	High	Low	Medium	High	Low	Medium	High
Center Height	25 mm	32 mm	37 mm	25 mm	30 mm	37 mm	23 mm	28 mm	33 mm
Saddle Height	8 mm	15 mm	20 mm	10 mm	15 mm	22 mm	10 mm	15 mm	20 mm
Max Fit. Obj. Bell Dia.	50 mm	63 mm	73 mm	49 mm	59 mm	73 mm	45 mm	55 mm	65 mm
Weight	4.5 oz	5.3 oz	5.4 oz	4.7 oz	5.2 oz	5.6 oz	4.4 oz	5.2 oz	5.6 oz



.338 LAPUA MAGNUM

RATED

ACCU-SYNC® CANTILEVER MOUNTS

QR PICATINNY CANTILEVER MOUNTS W/ MOA COMPENSATION

- » ACCU-SYNC® MOA Compensation Mounts for Long Range Feature a 70 mm Offset and 20 MOA, 30 MOA, or 40 MOA Vertical Compensation
- » Vertical Compensation is Precision Machined and Tilts Front of the Optic Downwards to Increase Access to Elevation Adjustment Range
- » Quick Release (QR) Picatinny Mount with Tool-free Tension Adjustment
- » Integral Squared Recoil Stops for Secure and Repeatable Zero Hold
- » 6061-T6 Aluminum with Matte Black Anodize
- » Rated for .338 LAPUA Magnum



20 MOA

34 mm / AIR420MOA
30 mm / AIR320MOA

30 MOA

34 mm / AIR430MOA
30 mm / AIR330MOA

40 MOA

34 mm / AIR440MOA
30 mm / AIR340MOA

QR Picatinny Cantilever Mount	AIR420MOA	AIR320MOA	AIR430MOA	AIR330MOA	AIR440MOA	AIR340MOA
MOA Compensation	20	20	30	30	40	40
Ring Diameter	34 mm	30 mm	34 mm	30 mm	34 mm	30 mm
Tilted Degree	0.33°	0.33°	0.50°	0.50°	0.67°	0.67°
Ring Distance (Inner)	60 mm	60 mm	60 mm	60 mm	60 mm	60 mm
Base Length	80 mm	80 mm	80 mm	80 mm	80 mm	80 mm
Offset Distance	70 mm	70 mm	70 mm	70 mm	70 mm	70 mm
Weight	6.0 oz	5.7 oz	6.0 oz	5.8 oz	6.0 oz	5.8 oz



QR PICATINNY CANTILEVER MOUNT

34 MM
X-HIGH / 70 MM OFFSET / AIR42270Q

30 MM
HIGH / 34 MM OFFSET / AIR32234Q
HIGH / 50 MM OFFSET / AIR32250Q

1 IN
MEDIUM / 34 MM OFFSET / AIR11834Q
MEDIUM / 50 MM OFFSET / AIR11850Q
HIGH / 50 MM OFFSET / AIR11850Q




PICATINNY CANTILEVER MOUNT

34 MM
HIGH / 50 MM OFFSET / AIR42250

30 MM
MEDIUM / 34 MM OFFSET / AIR31834
MEDIUM / 50 MM OFFSET / AIR31850
HIGH / 34 MM OFFSET / AIR32234
HIGH / 50 MM OFFSET / AIR32250

1 IN
MEDIUM / 34 MM OFFSET / AIR11834
MEDIUM / 50 MM OFFSET / AIR11850
HIGH / 34 MM OFFSET / AIR12234
HIGH / 50 MM OFFSET / AIR12250

QR Picatinny Cantilever Mount	-	AIR42270Q	-	-	AIR32234Q	AIR32250Q	AIR11834Q	AIR11850Q	-	AIR12250Q
Picatinny Cantilever Mount	AIR42250	-	AIR31834	AIR31850	AIR32234	AIR32250	AIR11834	AIR11850	AIR12234	AIR12250
Ring Diameter	34 mm	34 mm	30 mm	30 mm	30 mm	30 mm	1"	1"	1"	1"
Profile	High	X-High	Medium	Medium	High	High	Medium	Medium	High	High
Center Height	39 mm	39 mm	33 mm	33 mm	37 mm	37 mm	31 mm	31 mm	35 mm	35 mm
Saddle Height	22 mm	22 mm	18 mm	18 mm	22 mm	22 mm	18 mm	18 mm	22 mm	22 mm
Max Fit. Obj. Bell Dia.	77 mm	78 mm	65 mm	65 mm	73 mm	73 mm	61 mm	61 mm	69 mm	69 mm
Ring Distance (Inner)	60 mm	60 mm	44 mm	60 mm	44 mm	60 mm	44 mm	60 mm	44 mm	60 mm
Base Length	100 mm	80 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Offset Distance	50 mm	70 mm	34 mm	50 mm	34 mm	50 mm	34 mm	50 mm	34 mm	50 mm
Weight (QR)	-	6.1 oz	-	-	5.9 oz	6.0 oz	5.4 oz	5.6 oz	-	5.7 oz
Weight (NON-QR)	5.8 oz	-	5.2 oz	5.5 oz	5.6 oz	5.7 oz	5.0 oz	5.2 oz	5.2 oz	5.4 oz

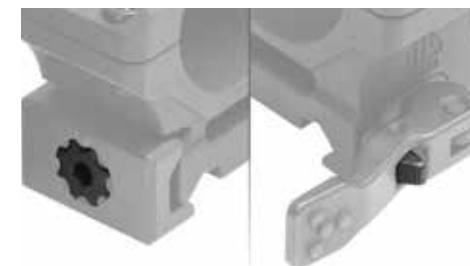

TOOL-FREE & WIDE-RANGE TENSION ADJUSTMENT

Set Tension Once and Adjustment Stays Locked In, Accommodates Even Most Out-of-spec Picatinny Rails and Provides a Secure Repeatable Zero

ADDITIONAL ACCESSORIES

ACCU-SYNC® ANTI-CANT LEVELERS

- » Magnetic Flip-to-Side Anti-Cant Bubble Leveler Easily Seen Through Peripherals without having to Break Target Focus and or Adjust Cheek Weld
- » Durable Matte Black Anodized 6061-T6 Aluminum Construction
- » Compatible with UTG® ACCU-SYNC® Cantilever Mounts and Rings that Feature a Mechanical Offset
- » US PAT. 1129372



ANTI-CANT LEVELERS

1 in / MT-RTR1
30 mm / MT-RTR3
34 mm / MT-RTR4

ACCU-SYNC® ANTI-CANT LEVELERS WITH MRDS MOUNTS

- » Includes Cover Plate and Docter® and RMR® Footprint Compatible Optic Plates

1 inch / MT-RTF1
30 mm / MT-RTF3
34 mm / MT-RTF4





ACCU-SYNC® QR SCOPE RINGS

ACCU-SYNC® QR SCOPE RINGS

- » Tool-free and Wide-Range Tension Adjustment
- » Accommodates Even Most Out-of-spec Picatinny Rails
- » Locking Quick Release Throw Levers Prevent Inadvertent Release
- » Squared Recoil Stops Prevent Forward and Rearward Movement under Recoil
- » Snag-free Radiused Edges and Corners and Melted Contours
- » Lightweight Skeletonized Matte Black Anodized Aluminum Construction
- » Rated for .338 LAPUA Magnum



PICATINNY W/LOCKING QR LEVER

34 MM	30 MM	1 IN
Medium / AQR415	Low / AQR310	Low / AQR110
High / AQR420	Medium / AQR315	Medium / AQR115
X-high / AQR422	High / AQR322	High / AQR120
2X-high / AQR432		

Picatinny/QR Lever	AQR415	AQR420	AQR422	AQR432	AQR310	AQR315	AQR322	AQR110	AQR115	AQR120
Ring Diameter	34 mm	34 mm	34 mm	34 mm	30 mm	30 mm	30 mm	1"	1"	1"
Profile	Medium	High	X-High	2X-High	Low	Medium	High	Low	Medium	High
Center Height	32 mm	37 mm	39 mm	49 mm	25 mm	30 mm	37 mm	22.7 mm	27.7 mm	32.7 mm
Saddle Height	15 mm	20 mm	22 mm	32 mm	10 mm	15 mm	22 mm	10 mm	15 mm	20 mm
Max Fit. Obj. Bell Dia.	64 mm	74 mm	98 mm	98 mm	50 mm	60 mm	74 mm	45.4 mm	55.4 mm	65.4 mm
Weight	4.4 oz	4.8 oz	4.8 oz	5.4 oz	3.6 oz	4.1 oz	4.5 oz	3.7 oz	4.0 oz	4.3 oz



UTG® SCOPE RINGS & MOUNTS



PICATINNY WITH TWIST LOCK
30 MM **1 IN**
Low / RG2W3104 Low / RG2W1104
Medium / RG2W3154 Medium / RG2W1154
High / RG2W3224 High / RG2W1204



DOVETAIL INTEGRAL MOUNT
30 MM **1 IN**
Medium / RGPM2PA-30M4 Medium / RGPM2PA-25M4
High / RGPM2PA-25H4



PICATINNY WITH HEX THUMB NUT
30 MM **1 IN**
Low / RGWM-30L4 Low / RGWM-25L2
Medium / RGWM-30M4 Medium / RGWM-25M4
High / RGWM-30H4 High / RGWM-25H4



DOVETAIL OFFSET INTEGRAL MOUNT
1 IN
High / RGPMOFS38-25H4



DOVETAIL WITH 4 MM HEX
30 MM **1 IN**
Medium / RGPM-30M4 Medium / RGPM-25M4
High / RGPM-30H4 High / RGPM-25H4

	RGPM2PA-30M4	RGPM2PA-25M4	RGPM2PA-25H4	RGPMOFS38-25H4
Ring Diameter	30 mm	1"	1"	1"
Profile	Medium	Medium	High	High
Center Height	29 mm	27 mm	34 mm	34 mm
Saddle Height	14 mm	14 mm	21 mm	21 mm
Max. Scope Outer Dia.	57 mm	53 mm	67 mm	67 mm
Ring Distance (Inner)	58 mm	58 mm	58 mm	39 mm
Base Length	100 mm	100 mm	100 mm	62 mm
Offset Distance	-	-	-	38 mm

Picatinny/Twist Lock	RG2W3104	-	RG2W3154	-	RG2W3224	-	-	RG2W1104	RG2W1154	-	-	RG2W1204	-
Picatinny/Hex Thumb Nut	-	RGWM-30L4	-	RGWM-30M4	-	RGWM-30H4	-	RGWM-25L2	-	RGWM-25M4	RGWM-25H4	-	-
Dovetail/Hex	-	-	-	RGPM-30M4	-	-	RGPM-30H4	-	-	RGPM-25M4	-	-	RGPM-25H4
Ring Diameter	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	1"	1"	1"	1"	1"	1"
Profile	Low	Low	Medium	Medium	High	High	High	Low	Medium	Medium	High	High	High
Center Height	25 mm	24 mm	30 mm	29 mm	37 mm	37 mm	36 mm	23 mm	28 mm	27 mm	31 mm	33 mm	34 mm
Saddle Height	10 mm	9 mm	15 mm	14 mm	22 mm	22 mm	21 mm	10 mm	15 mm	14 mm	18 mm	20 mm	21 mm
Max Fit. Obj. Bell Dia.	49 mm	47 mm	59 mm	57 mm	73 mm	73 mm	71 mm	45 mm	55 mm	53 mm	61 mm	65 mm	67 mm



UTG PRO® CLAW MOUNT FOR MP5® / MP5K

UTG PRO®  **NEW**

- » Proudly Designed and Made in USA
- » Low Profile and Extended Picatinny Rail for Ample Optics Real Estate with Machined Cutout for Serial Number Identification
- » User-friendly Receiver Locking Interface
- » Lightweight Matte Black Anodized Aluminum Construction
- » Compatible with MP5® and MP5K Pattern Pistols and Rifles



WWW.LEAPER.COM
SINCE 1992

	MTU056
<i>Platform</i>	for MP5® & MP5K
<i>Length</i>	5.43" (138 mm)
<i>Width x Height</i>	1.63" x 1.2" (41 x 30 mm)
<i>Weight</i>	2 oz (57 g)
<i>Picatinny Slots</i>	13



User-friendly Receiver Locking Interface



Extended Picatinny Flat-top with Cutout for Serial Number

MORE FOR YOUR MP5® & MP5K

UTG PRO® 
MONOLITHIC HANDGUARDS FOR MP5® & MP5K
(Refer to pg. 108 - 109 for Detailed Info.)

- » Monolithic Design Combines M-LOK® and Optics Real Estate into One Rigid Mount
- » Extended Picatinny Flattop with Cutout for Serial Number Identification
- » Chamfered Locking Recess Notch Prevents Hot Spots and Snag Points while Manipulating Charging Handle

FOR MP5® EXTENDED / MTU055SSME
FOR MP5® / MTU055SSM
FOR MP5K / MTU055SSMK



UTG PRO® 
M-LOK® LIGHT MOUNTS FOR MP5®
(Refer to pg. 160 - 161 for Detailed Info.)

- » Securely Attaches to Front Sight, Does Not Interfere with Handguards or Forearms
- » M-LOK® Slots at the 11, 12, and 1 O'clock for Mounting Lights, Pressure Switches, and Other Accessories

/ MTU058SSM





DRILLED & TAPPED RECEIVER MOUNTS



UTG PRO FOR RUGER® 10/22®

- » Compatible with RUGER® 10/22® with Drilled and Tapped Receiver
 - » 4.67" Length with 11 Picatinny Slots
 - » Laser Engraved T-marked Positional Indicators
 - » Matte Black Hard Coat Anodized 6061-T6 Aluminum Construction
 - » User-friendly Installation, No Permanent Modification Required
- / MTU030T22



UTG PRO FOR MOSSBERG® 500® & 590®

- » Compatible with MOSSBERG® 500® & 590® Shotguns with Drilled and Tapped Receiver
 - » 5.5" Overall Length with 13 Picatinny Slots
 - » Laser Engraved T-marked Positional Indicators
 - » U-Cut Sight Channel for Access to Front Sight Bead
 - » Matte Black Hard Coat Anodized 6061-T6 Aluminum Construction
 - » User-Friendly Installation, No Permanent Modification Required
- / MTU029SG



UTG PRO FOR REMINGTON® 870™ / 1100™

- » Compatible with REMINGTON® 870™ & 1100™ Shotguns with Drilled and Tapped Receiver
 - » 6.1" Overall Length with 14 Picatinny Slots
 - » Laser Engraved T-marked Positional Indicators
 - » U-Cut Sight Channel for Access to Front Sight Bead
 - » Matte Black Hard Coat Anodized 6061-T6 Aluminum Construction
 - » User-Friendly Installation, No Permanent Modification Required
- / MTU028SG



FOR REMINGTON® 700®

- » Clearance Cut for Reliable Case Ejection
- » 6-slot MIL-STD-1913 Picatinny Top Rail
- » Solid Steel Construction

For REMINGTON® 700® Long Action Rifles / MNT-RM700
For REMINGTON® 700® Short Action Rifles / MNT-RM700S



DOVETAIL TO PICATINNY MOUNTS



DOVETAIL TO PICATINNY UNIVERSAL ADAPTOR

- » Compatible with 9 mm - 11 mm Flat or Rounded Dovetail Rails
- » 5.7" Length with 14 Picatinny Slots, 0.59" Saddle Height, and 51.8 mm Cantilevered Offset
- » Features Optional Threaded Recoil Stop Pins for Added Zero Retention
- » Matte Black Anodized 6061-T6 Aluminum Construction
- » US PAT. 10352656, EU PAT. EP3196588

/ MNT-DTW145



DOVETAIL TO PICATINNY ADAPTOR MOUNT

- » Compatible with Flat Receivers Equipped with 9 mm - 11 mm Dovetail Rails
- » 3.94" Scalloped 9 Picatinny Slots with 0.59" Saddle Height
- » Matte Black Anodized 6061-T6 Aluminum Construction
- » US PAT. D837330

/ MNT-PMTOWL-A



DOVETAIL-TO-PICATINNY SNAP-ON RAIL ADAPTOR

- » Adapts Most Picatinny Rings and Mounts to Flat Dovetail Rail Interface
- » Spring-loaded Adjustable Dovetail Width from 9 mm - 11 mm
- » Removable and Threaded Vertical Stop Pin Provides Added Retention for Dovetail Rails Equipped with Stop Pin Holes
- » Lightweight Aluminum and Steel Construction
- » US PAT. 8752325

Set of 2 / MNT-DT2PW01



AK RECEIVER MOUNTS



ACCU-SYNC® QR AK SIDE MOUNT

- » Matte Black Anodized Steel-reinforced 6061-T6 Aluminum Construction
- » Tool-free, Tension-adjustable Quick Release (QR) Lever Mount Compatible with Most Standard Receiver Side Rails
- » Universal 16-slot Picatinny Top Rail, Centering with Receiver May Vary Depending on Rifle Make and Model and Manufacturer Tolerances
- » Overall Lightweight Design Features 2 Side M-LOK® Slots for Attaching Accessories
- » US PAT. D949276, US PAT. D949277

/ MT-UAK01



AK QD SIDE MOUNT FOR ZASTAVA M70 N-PAP

- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Scalloped 15 Slot Picatinny Rail Features a Deep U-cut Channel for Accessing Iron Sights
- » Overall Lightweight Design Features 2 Side M-LOK® Slots for Attaching Accessories
- » Adjustable Quick Detach Lever Mount
- » US PAT. D949276, US PAT. D949277

/ MT-ZAK01



UTG PRO®

AK QD SIDE MOUNT

- » Proudly Designed and Made in USA
- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Lightweight Design with Deep U-Cut Channel for Accessing Iron Sights
- » 16 Slot Picatinny Top Rail with Detachable 6 Slot Side Rail
- » Adjustable Quick Detach Lever Mount

/ MTU016



AK STEEL SIDE PLATE

- » Durable Steel Construction with a Matte Black Finish
- » Fits Both Milled and Stamped AK Receivers and Accepts a Wide Variety of Side Optic Mounts
- » Permanent Modification Required

/ TL-M47SR

M1A RECEIVER MOUNT



OPTIC MOUNT FOR M14/M1A

- » Full-length 15 Slot Scalloped Picatinny Top Rail
- » Iron Sight Accessible Channel
- » Secure Zero Retention through 4 Points of Contact with Receiver
- » Matte Black Anodized Aluminum Construction
- » No Permanent Modification Required

/ MNT-914V2



SHOTGUN SIDE SADDLE MOUNTS



FOR MOSSBERG® 500® / 590® / 590M®

- » Durable 6061-T6 Aluminum Construction Finished in a Matte Black Anodization
- » Removable 4-Capacity Shot Shell Carrier Included
- » MT-MB590: Compatible with 12 Gauge MOSSBERG® 500®/590® Shotguns
- » MT-MB590M: Compatible with 12 Gauge MOSSBERG® 590M® Mag-Fed Shotguns

For MOSSBERG® 500® / 590® / MT-MB590
For MOSSBERG® 590M® / MT-MB590M



FOR REMINGTON® 870™

- » Durable 6061-T6 Aluminum Construction Finished in a Matte Black Anodization
- » Removable 4-Capacity Shot Shell Carrier Included
- » Compatible with 12 Gauge REMINGTON® 870™ and 870 DM Shotguns with up to a 3.5" Chambering

/ MT-RM870



SUPER SLIM PICATINNY RISER MOUNTS



PICATINNY RISER MOUNTS

3-SLOT


0.50" Saddle Height / MT-RSX5S
0.75" Saddle Height / MT-RSX7S
0.83" Saddle Height / MT-RSX8S
1.00" Saddle Height / MT-RSX1S

13-SLOT

0.50" Saddle Height / MT-RSX5L
0.75" Saddle Height / MT-RSX7L
0.83" Saddle Height / MT-RSX8L
1.00" Saddle Height / MT-RSX1L



20 MOA COMPENSATION PICATINNY RISER MOUNT

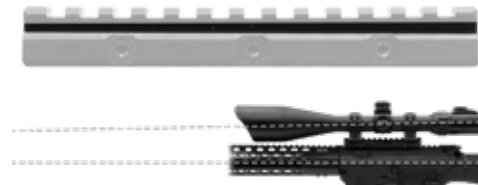

13-SLOT MT-RSX20MOA

SUPER SLIM PICATINNY RISER MOUNTS

- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Lightweight and Low Profile with Dehorned Corners and Melted Contours
- » Laser Engraved T-marked MIL-STD-1913 Picatinny Rail
- » Squared Recoil Stops for a Secure and Repeatable Zero Hold
- » Lightening Cuts Reduce Overall Weight and Bulk (Medium and High Profile Only)

	MT-RSX5S	MT-RSX7S	MT-RSX8S	MT-RSX1S	MT-RSX5L	MT-RSX7L	MT-RSX8L	MT-RSX1L	MT-RSX20MOA
<i>Length</i>	1.6"	1.6"	1.6"	1.6"	5.5"	5.5"	5.5"	5.5"	5.5"
<i>Picatinny Slots</i>	3	3	3	3	13	13	13	13	13
<i>Saddle Height</i>	0.50"	0.75"	0.83"	1.00"	0.50"	0.75"	0.83"	1.00"	0.52"/0.55"
<i>Weight</i>	0.9 oz	0.9 oz	1.0 oz	1.0 oz	2.7 oz	2.7 oz	2.8 oz	2.8 oz	2.7 oz
<i>US PAT.</i>	D784482	D784483	-	D784481	D784482	D784483	-	D784481	-



DEDICATED PICATINNY OPTIC MOUNTS

FOR DOCTER® / RMR®



45 DEGREE
 For DOCTER® Footprint / RDM-2045
 For RMR® Footprint / MT-RMR45



LOW PROFILE
 For RMR® Footprint / MT-RMRXS



ABSOLUTE CO-WITNESS
 For DOCTER® Footprint / RDM-20AC
 For RMR® Footprint / MT-RMRAC



LOWER 1/3 CO-WITNESS
 For RMR® Footprint / MT-RMR13C



FOR AIMPOINT® MICRO

LOWER 1/3 & ABSOLUTE CO-WITNESS
 Lower 1/3 Co-Witness / MT-T113C
 Absolute Co-Witness / MT-T1AC

	RDM-2045	RDM-20AC	MT-RMR45	MT-RMR13C	MT-RMRKIT		MT-T1AC	MT-T113C
					MT-RMRAC	MT-RMRXS		
Footprint	For DOCTER®	For DOCTER®	For TRIJICON RMR®	For TRIJICON RMR®	For TRIJICON RMR®	For TRIJICON RMR®	For AIMPOINT® Micro	For AIMPOINT® Micro
Mount Type	45 Degree	Absolute Co-witness	45 Degree	Lower 1/3 Co-witness	Absolute Co-witness	Low Profile	Absolute Co-witness	Lower 1/3 Co-witness
Saddle Height	N/A	0.78"	N/A	0.95"	0.87"	0.40"	0.78"	1.04"
Length / Width	1.8" / 2.5"	1.8" / 1.1"	1.8" / 2.5"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"	1.9" / 1.2"	1.9" / 1.2"
Weight	1.5 oz	1.5 oz	1.4 oz	1.6 oz	1.5 oz	1.4 oz	1.2 oz	1.3 oz



DEDICATED DOVETAIL OPTIC MOUNTS

FOR RMR®



REAR SIGHT DOVETAIL
For GLOCK® Dovetail / MT-RMRGL

FOR DOCTER®



REAR SIGHT DOVETAIL
For GLOCK® Dovetail / RDM-20GL
For Sig P-Series Dovetail / RDM-20SIG
For S&W M&P® Dovetail / RDM-20SW



LOW PROFILE
0.33" Saddle Height / RDM-20XSD

	MT-RMRGL	RDM-20GL	RDM-20SIG	RDM-20SW	RDM-20XSD
<i>Footprint</i>	For TRIJICON RMR®	For DOCTER®	For DOCTER®	For DOCTER®	For DOCTER®
<i>Mount Type</i>	For GLOCK® Dovetail	For GLOCK® Dovetail	For SIG P-Series Dovetail	For S&W M&P® Dovetail	9 mm - 11 mm Flat or Round Dovetail
<i>Saddle Height</i>	0.16"	0.15"	0.16"	0.16"	0.3"
<i>Length / Width</i>	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"
<i>Weight</i>	0.4 oz	0.5 oz	0.5 oz	0.5 oz	21.3 oz

OP3 MICRO MRDS

(Refer to pg. 068 - 069 for Detailed Info.)



OP3 MICRO SL
Side Loading Battery / Manual Brightness
For DOCTER® Footprint / **Red 4 MOA** / OP-RDM20CT

OP3 MICRO SLS
Side Loading Battery / Auto Sensing Brightness with Manual Override
For DOCTER® Footprint / **Red 4 MOA** / OP-RDM20CTS
For RMR® Footprint / **Red 4 MOA** / OP-RMR20CTS

OP3 MICRO
Manual Brightness
For DOCTER® Footprint / **Red 4 MOA** / OP-RDM20R
For DOCTER® Footprint / **Green 4 MOA** / OP-RDM20G
For RMR® Footprint / **Red 4 MOA** / OP-RMR20R