



**LEAPERS<sup>®</sup>**

**2025 PRODUCT CATALOG**







# THE LEAPERS PHILOSOPHY

**DELIBERATE INTEGRATED MANUFACTURING.  
SOLUTIONS END-TO-END SINCE 1992.**

"From day one, I felt strongly as a small business: I have to know how I build my products. My operation depends on pushing these products out to distributors. But you always have this concern: Who is making this for you? How is this being made? And: how am I going to control what I want it to do?"

- David Ding, Founder and CEO of Leapers

Since the beginning Leapers has believed and invested in the long-term development of products to span generations. We knew vertical integration was the key to having full control over making great products. In 2009 we broke ground on our U.S. manufacturing facility UTG PRO® at headquarters in Michigan, just one year after the financial crisis. Today UTG PRO® operates over 30 world-class CNC machines from Mazak, Haas, and Brother, and built our own 100-yard indoor shooting range for on-demand testing.

Each year is a progression expanding our in-house capabilities. In 2024 we scaled production of our billet receivers at UTG PRO® in Livonia and came out with our new high-performance line of riflescopes, Integrix®, after 5 long years of development and optimization.

We believe in equity. From our affordable line of UTG® products to our uncompromising UTG PRO® products Made in USA designed for the discerning civilian. We made Integrix® for the professional marksman and are pushing the limits to take that DNA and apply it to our optics at all price levels.

Our mission is to be your solution provider. After dedicating decades to progressing our manufacturing, our current era is focused on integrating shooter feedback into every detail of product development: out of the office and on the ground.

**LEAPERS®**






# INTEGRATED CAPABILITIES

## FROM CNC MACHINE TO SHOOTING RANGE: AN ENGINEER'S PLAYGROUND.

Leapers began its manufacturing journey over 30 years ago. Over the years as our expertise matured we made methodical, deliberate investments to own our product development lifecycle end-to-end. We are on the leading edge of automation with Mazak, installing and productionalizing two of their Pallettech multi-tasking solutions and expanding their collective capacity to 72 pallets a full decade before most manufacturers across any industry.

Today UTG PRO® U.S. Manufacturing runs an immaculate floor: 34 top of the line CNC machines, a majority Mazak alongside Brother, Haas, Miyano and Fanuc. Our UTG Europe Distribution Center in Germany allows us to serve customers worldwide, and our UTG Taiwan R&D Center keeps a pulse on the latest technology, standing amongst world-class semiconductor manufacturing companies outside Taipei. The sky is the limit in our facility: whether you are a shooter with a specific need or a company building a custom project.

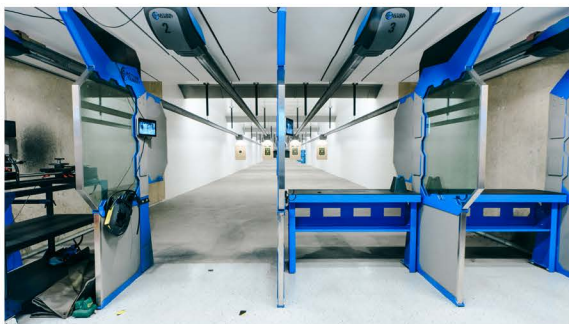


Our 100-yard indoor shooting range at headquarters in Livonia, Michigan allows us to do live-fire testing as immediate feedback to prototypes machined at UTG PRO® next door.



Learn more about our manufacturing journey on our website.

## HANDGUARD MACHINING

The UTG PRO® Monolithic Handguard for MP5 and MP5K hit the market 2024. We machine this handguard on a Mazak HCN4000 4-axis horizontal milling machine with a 24 minute cycle time. They are then cerakoted, inspected, and packaged by us. Just one example of our daily machining operation.

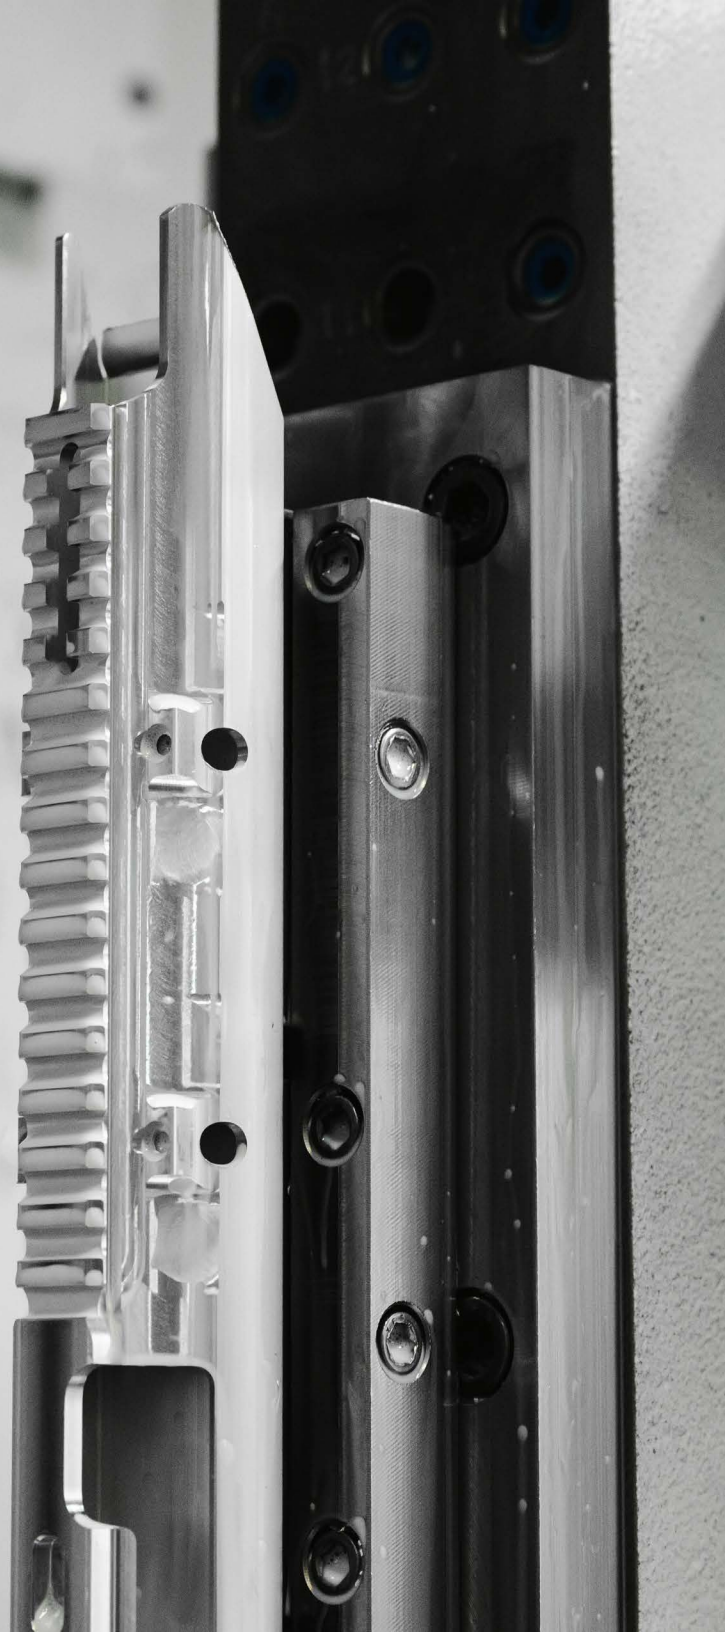





## ROBOTIC POLYMER INJECTION

We run Japanese Fanuc Roboshot Electric Polymer Injection Machines with glass fiber-reinforced polymer to give proven and unbeatable durability to our magazines for AR, AK, and Glock®. By owning different types of manufacturing in-house, we are able to build for quality and a fair price ecosystem for dealers and end customers alike.



## PRECISION QUALITY CONTROL

In 2023 we obtained our 07 license and began manufacturing billet AR receivers in Michigan. Pictured is a specialized precision Zeiss Coordinate Measuring Machine to check the receiver for complex irregular dimensions and guarantee concentricity. We do climate-controlled inspection with state-of-the-art equipment to ensure dimensions and tolerance requirements are met.



## HIGH-PERFORMANCE OPTICS

In 2024 we entered production of our high-performance optics brand, INTEGRIX®, a key milestone after 5 years of investment in our capabilities. We use premium German and Japanese glass built to spec from our painstaking optical design. We machine, measure, assemble, and test in the lab and on the range from start to finish with meticulous precision to deliver a new level of optics.





## BE CUSTOMER FIRST

### DEVELOPMENT OUT OF THE OFFICE AND ON THE GROUND

Advancing exceptional products extends beyond the engineering; it centers on the shooter. After building up manufacturing proficiency over a breadth of products, our current era is focused on utilizing our capabilities to their fullest potential.

We are evolving product development to get our teams out of the office and training beside you, immersing ourselves in the shooter's experience using our products within real-world conditions. Some of us are hunters, competitors, or former military, but the best product feedback is not left to our own. The best solutions result from being on the ground, engaging with shooting communities directly, and refining shooter-driven details based on first-hand experience.

Our Engineering Manager Jay is excited to return to Lynx Brutality in 2025. We took Sylvia from Accounting to train with the Army Marksmanship Unit at Camp Perry. We had a blast learning from an advanced ELR course with the SAAM shooters at FTW Ranch, and we are doubling down on encouraging our people to borrow our products on their next hunt in Michigan.

Find us at the next competition, trade show, or on social media, and let us know where you see an opportunity to build something better. We want to hear from you.

### GOING THROUGH THE RINGER

When Leapers got the opportunity to sponsor Lynx Brutality with Polenar Tactical, we knew there was no better way to engage with the European shooting community than to compete ourselves. Luckily Jay was already fit, and guys across multiple teams pitched in to train him. We ran drills before hours and during lunch, and gathered invaluable firsthand feedback on our product. Our INTEGRITY® LPVO and UTG® dot sight performed with flying colors, as did our Engineering Manager Jay.





## CREATING A SHOOTING CULTURE

Nurturing our shooting culture is important. Sylvia's day job is Accounting and she won a Leapers AR at our year-end raffle. Here she shoots for the first time at Camp Perry. In July we took every single employee for a fun event on a range to get behind the gun, learn fundamentals, and shoot some steel.



## ADVANCING OUR MARKSMANSHIP

Whatever our current experience and expertise, we will not be satisfied. Last August we enrolled ourselves in a custom Advanced ELR course from the Sportsman's All-Weather All-Terrain Marksmanship (SAAM) group at FTW Ranch, learning new formulas and shortcuts for wind and to better leverage our Kestrels.



## HUNTING AND LOVE OF OUTDOORS

Leapers was born from tactical solutions, but we have accumulated a compelling set of products for hunters. Here we take the team and our new scopes out to Muller Hunting & Safari in South Africa, beholding the beautiful wild bush and knocking off our big game bucket list from Cape Eland to Oryx and Kudu, the Grey Ghost of Africa.



# NEW PRODUCTS 2025

## ACCESSORIES AND SIGHTS

GEN II AR PARTS KIT [P170]

M-LOK PANEL COVERS [P168]

ULTRA SLIM FLIP-UP SIGHTS [P095]

## OUR BRANDS

**UTG<sup>®</sup> PRO**  
MADE IN USA



**ACCUSHOT PRO<sup>™</sup>**

**INTEGRIX<sup>®</sup>**

## OPTICS & MOUNTS

UTG PRO<sup>®</sup> P.O.I.<sup>®</sup> Rings, Low Profile [P074]

INTEGRIX<sup>®</sup> iX6 3-18X44 [P024]

INTEGRIX<sup>®</sup> iX6 4.5-27X56 [P026]

INTEGRIX<sup>®</sup> iX6 6-36X56 [P028]

INTEGRIX<sup>®</sup> iXF 4.5X28 [P030]

ACCUSHOT PRO<sup>™</sup> AS6 1-6X24 [P036]

ACCUSHOT PRO<sup>™</sup> AS3 3-9X36 [P038]

ACCUSHOT PRO<sup>™</sup> AS4 3-12X42 [P040]



A collection of firearms and accessories is displayed on a dark, diamond-plate textured surface. The items include an AK-style rifle with a folding stock, an MP5-style submachine gun, a handguard, a claw mount, an M-Lok light mount, and a bipod. The firearms are primarily black, with some featuring camouflage patterns or gold-colored accents. The accessories are also black, with some having gold-colored accents. The background is a dark, diamond-plate textured surface.

## FOR YOUR AK

UTG PRO® AK FOLDING STOCK [P138]

## FOR YOUR MP5® AND MP5K

UTG PRO® MONOLITHIC HANDGUARDS [P108]

UTG PRO® CLAW MOUNT [P080]

UTG PRO® M-LOK® LIGHT MOUNT [P161]

## BIPODS

GOLIATH™ BIPOD, MED PROFILE [P122]


GOLIATH™ BIPOD, LOW PROFILE [P122]

OVER BORE BIPOD ADAPTOR [P126]




# TABLE OF CONTENTS


<b>COMPANY INTRODUCTION</b> .....	002
THE LEAPERS PHILOSOPHY .....	002
INTEGRATED CAPABILITIES .....	004
BE CUSTOMER FIRST .....	006
NEW PRODUCTS 2025 .....	008




<b>SCOPES</b> .....	012
INTEGRIX <sup>®</sup> SCOPES <b>[NEW]</b> .....	014
IX8 1-8X28 LPVO SCOPES .....	022
IX6 3-18X44 MID POWER SCOPES .....	024
IX6 4.5-27X56 LR/ELR SCOPES .....	026
IX6 6-36X56 LR/ELR SCOPES .....	028
IXF 4.5X28 SERVICE RIFLE SCOPES .....	030
ACCUSHOT PRO <sup>™</sup> SCOPES <b>[NEW]</b> .....	032
AS6 1-6X24 LPVO SCOPE .....	036
AS3 3-9X36 LOW TO MID POWER SCOPE .....	038
AS4 3-12X42 MID POWER SCOPE .....	040
UTG <sup>®</sup> SFP SCOPES .....	042
OP3 SCOPES .....	044
SCP3 SCOPES .....	046
BUG BUSTER <sup>®</sup> SCOPES .....	048
TRUE HUNTER <sup>®</sup> SCOPES .....	050
CROSSBOW SCOPES .....	052
LONG EYE RELIEF SCOPES .....	054
RETICLES .....	056
SPECIFICATIONS .....	062




<b>DOT SIGHTS &amp; MAGNIFIERS</b> .....	064
UTG <sup>®</sup> ACCU-SYNC <sup>®</sup> DOT SIGHTS .....	066
UTG <sup>®</sup> OP3 MICRO MRDS .....	068
UTG <sup>®</sup> 3X FLIP-TO-SIDE MAGNIFIER .....	070
UTG <sup>®</sup> ITA DOT SIGHTS .....	070




<b>OPTIC MOUNTS &amp; RINGS</b> .....	072
UTG PRO <sup>®</sup> PD.I <sup>®</sup> SCOPE RINGS <b>[NEW]</b> .....	074
SCOPE RINGS & MOUNTS .....	076
UTG PRO <sup>®</sup> CLAW MOUNT FOR MP5 <sup>®</sup> & MP5K <b>[NEW]</b> .....	080
DRILLED & TAPPED RECEIVER MOUNTS .....	082
DOVETAIL-TO-PICATINNY MOUNTS .....	083
AK RECEIVER MOUNTS .....	084
M1A RECEIVER MOUNT .....	085
SHOTGUN SIDE SADDLE MOUNTS .....	086
SUPER SLIM PICATINNY RISER MOUNTS .....	087
DEDICATED OPTIC MOUNTS .....	088



<b>IRON SIGHTS</b> .....	090
UTG PRO <sup>®</sup> FLIP-UP SIGHTS & CARRY HANDLE .....	092
AR FLIP-UP SIGHTS <b>[NEW]</b> .....	094
FIXED SIGHTS .....	096
CARRY HANDLE .....	096




<b>RECEIVERS</b> .....	098
UTG PRO <sup>®</sup> AR15 AMBI BILLET RECEIVERS .....	102
UTG PRO <sup>®</sup> AR15 BILLET RECEIVERS .....	104




<b>HANDGUARDS</b> .....	106
UTG PRO <sup>®</sup> HANDGUARDS FOR MP5 <sup>®</sup> & MP5K <b>[NEW]</b> .....	108
UTG PRO <sup>®</sup> FORERUNNER FREE FLOAT .....	110
UTG PRO <sup>®</sup> ARWEN FREE FLOAT .....	112
UTG PRO <sup>®</sup> SUPER SLIM SD FREE FLOAT .....	114
UTG PRO <sup>®</sup> ULTRA SLIM FREE FLOAT .....	116
UTG PRO <sup>®</sup> SUPER SLIM FREE FLOAT .....	116
UTG PRO <sup>®</sup> AR15 DROP-IN .....	117
UTG PRO <sup>®</sup> AKM DROP-IN .....	118
UTG PRO <sup>®</sup> RUGER PC CARBINE DROP-IN .....	119







<b>BIPODS</b> .....	120
GOLIATH™ BIPODS <b>[NEW]</b> .....	122
BIG BORE FULL STABILITY BIPOD .....	124
OVER BORE BIPOD .....	126
UTG PRO® TBNR® BIPODS .....	128
RECON 360® TL BIPODS .....	130
RECON FLEX® BIPODS .....	132
QUICK DETACH BIPODS .....	134
D GRIP® .....	135




<b>STOCKS, BUFFERS &amp; TUBES</b> .....	136
UTG PRO® AK SIDE FOLDING STOCKS <b>[NEW]</b> .....	138
UTG PRO® AR COLLAPSIBLE STOCKS .....	140
FIXED STOCKS .....	142
TUBES & BUFFERS .....	143




<b>GRIPS &amp; HAND STOPS</b> .....	144
PISTOL GRIPS .....	146
VERTICAL GRIPS .....	147
ULTRA SLIM ANGLED FOREGRIPS .....	148
HAND STOPS .....	149



<b>MAGAZINES</b> .....	150
AR POLYMER MAGAZINES .....	152
AK/AKM POLYMER MAGAZINE .....	154
POLYMER MAGAZINES FOR GLOCK .....	156



<b>FLASHLIGHTS &amp; LASERS</b> .....	158
UTG PRO® M-LOK® LIGHT MOUNT FOR MP5® <b>[NEW]</b> .....	160
OFFSET LIGHT MOUNTS .....	160
LASERS .....	162
WEAPON LIGHTS .....	163
2-IN-1 LASER/FLASHLIGHT COMBOS .....	163



<b>ACCESSORIES &amp; TOOLS</b> .....	164
UTG PRO® M-LOK® ARCA RAILS <b>[NEW]</b> .....	166
RAIL SECTIONS & COVERS <b>[NEW]</b> .....	168
QD SLING SWIVELS & ADAPTORS .....	169
AR ACCESSORIES <b>[NEW]</b> .....	170
MUZZLE DEVICES & GAS BLOCKS .....	171
CZ SCORPION ACCESSORIES .....	172
TOOLS & MAINTENANCE .....	172



<b>SOFT GOODS</b> .....	174
RAPID DEPLOYMENT PACKS .....	176
KEEP-IT-SIMPLE KIS CASES .....	178
MC CASES .....	180
RC CASE .....	181
PISTOL CASES .....	182
ALL-IN-ONE RANGE/UTILITY GO BAG .....	184
TRAIL SEEKER, TRAIL CAM BACKPACK .....	186
OVERBOUND PACK .....	187
HOLSTERS .....	188
TACTICAL VESTS .....	189
LONG GUN SLINGS & BELT .....	189

## NEW PRODUCTS FOR MP5® AND MP5K

UTG PRO® CLAW MOUNT FOR MP5® & MP5K .....	080
UTG PRO® HANDGUARDS FOR MP5® & MP5K .....	108
UTG PRO® M-LOK® LIGHT MOUNT FOR MP5® .....	160

## OUR BRANDS



Third party trademarks may be used in this catalog for the convenience of customers to indicate the fit or compatibility of the applicable Leapers items.

For Patent Information, please visit: <https://www.leapers.com/patents>



# SCOPES



## INTRODUCING OUR NEW BRANDS OF OPTICS

Introducing INTEGRIX<sup>®</sup>, our new flagship brand of precision optics. For over 30 years UTG<sup>®</sup> riflescopes have outfitted shooters of all disciplines and levels. With INTEGRIX<sup>®</sup> we take our manufacturing to a new pinnacle to deliver uncompromising performance: meticulously optimized glass, exhaustively measured, executed to the highest standard. INTEGRIX<sup>®</sup>, ACCUSHOT PRO<sup>™</sup>, and UTG<sup>®</sup> are a culmination of decades of experience in manufacturing to deliver performance above and beyond at an equitable price, no matter the shooter.





## JUMP TO A SERIES

<b>INTEGRIX® SCOPES [NEW]</b>	014
IX8 1-8X28 LPVO Scopes	022
IX6 3-18X44 Mid Power Scopes	024
IX6 4.5-27X56 LR/ELR Scopes	026
IX6 6-36X56 LR/ELR Scopes	028
IXF 4.5X28 Service Rifle Scopes	030
<b>ACCUSHOT PRO™ SCOPES [NEW]</b>	032
AS6 1-6X24 LPVO Scope	036
AS3 3-9X36 Low to Mid Power Scope	038
AS4 3-12X42 Mid Power Scope	040
<b>UTG® SFP SCOPES</b>	042
OP3 Scopes	044
SCP3 Scopes	046
BUG BUSTER® Scopes	048
TRUE HUNTER® Scopes	050
Crossbow Scopes	052
Long Eye Relief Scopes	054
<b>RETICLES</b>	056
<b>SPECIFICATIONS</b>	062

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]





# INTEGRIX®

In the pursuit of the very pinnacle of performance, a marksman's choice of optic is as critical a decision as choosing their own right hand. It is with the same discerning eye, demanding expectations, and endless repetition that a marksman applies to their training that Leapers developed INTEGRIX®.

INTEGRIX® optical systems are built with German Schott and Japanese Ohara multicoated glass to achieve 92% light transmission, industry-leading FOV and clarity, machined, assembled, and executed with the precision a professional marksman demands. No compromises.

INTEGRIX® combines over 30 years' experience in manufacturing with the voice of the customer to deliver a meticulously fine-tuned optomechanical design. Integrated end-to-end. From the lens system and our manufacturing down to the shooter, their rifle, and their optic. **THIS IS INTEGRIX®.**



**FULL INTEGRATION WITH YOUR OPTIC.  
SURPASS YOUR TOP PERFORMANCE.  
SHOOT IT TO PROVE IT.**







# INTEGRIX<sup>®</sup>

## FULL INTEGRATION WITH YOUR OPTIC.

### LOW POWER [LPVO] SCOPES

**iX8 1-8X28 FFP/SFP** (pg. 022-023)

Low Power Variable Optics are a versatile choice for a variety of dynamic, on-the-move, and close-to-medium range engagements. INTEGRIX<sup>®</sup> LPVOs go from 1X up to 8-10X magnification while maintaining a wide comfortable FOV.

### MID POWER SCOPES

**iX6 3-18X44 FFP** (pg. 024-025)

Arguably the most common amongst hunters and PRS rifle shooters, mid power optics run from 3X to 18X. Our mid range scopes allow you to maximize your performance while optimizing for size and weight.

### HIGH POWER [LR/ELR] SCOPES

**iX6 4.5-27X56 FFP | iX6 6-36X56 FFP** (pg. 026-029)

For long range and extreme long range engagements, high powered scopes feature a larger objective lens to maximize light. Our wide magnification range and reticle choices allow shooters to acquire targets of all sizes at long range.

### COMPETITION SCOPES

**Service Rifle iXF 4.5X28 SFP** (pg. 030-031)

The iXF Service Rifle scope is a fixed SFP 4.5X optic intended for High Power competitors. This special edition competition scope has high-profile uncapped tactile turrets and an option for a threaded lens reducer.



**iX8**



**iX6**



**iX6**



**iXF**



# FEATURES



## WIDE OPEN FOV

Wide field of view to maximize the information seen around your targets and the immediate environment.



## OVER 92% LIGHT TRANSMISSION

Over 92% light transmission for the best visibility across mirage and low light conditions.



## PREMIUM GLASS

Premium multicoated German SCHOTT and Japanese OHARA glass for high-definition image quality.



## EDGE-TO-EDGE CLARITY & CONTRAST

Clear high-contrast picture on-axis and off-axis to discern details about your target across your FOV.



## CONSTANT EYE RELIEF

Constant and comfortable eye box for easy target acquisition, even at high magnification.



## PATENTED ZERO STOP

Easily resettable zero stop to quickly return to zero elevation on mid and long range models.



## RED/GREEN ILLUMINATION

Red and green illumination with 8 brightness intensities and 12 hour auto shutoff.

# RIGOROUS TESTING



## EXTREME CLIMATE PROOF

24 hours of Four Corners environmental testing from -40°C to 70°C at low and high humidity.



## IPX7 WATERPROOF

Fully waterproof with no fog or leaks at 100% water submersion for 30 minutes at 1 meter depth.



## OPTIMIZED OPTICAL DESIGN

World-class optical design for minimized aberration and distortion across the color spectrum and FOV.



## PRECISION TRACKING

Precise W/E adjustments validated across live fire and collimator methods.



## RETICLE ACCURACY

Precision etched reticles with double-validated dimensions for holdover and ranging accuracy.



## .338 LAPUA MAGNUM RATED


Recoil endurance over 300+ rounds of .338 Lapua Magnum, validated every 100 rounds.



## .30 CAL SPRINGER AIR GUN RATED

Recoil endurance over 300+ rounds through a Hatsan .30 Cal Carnivore for twice the validation.



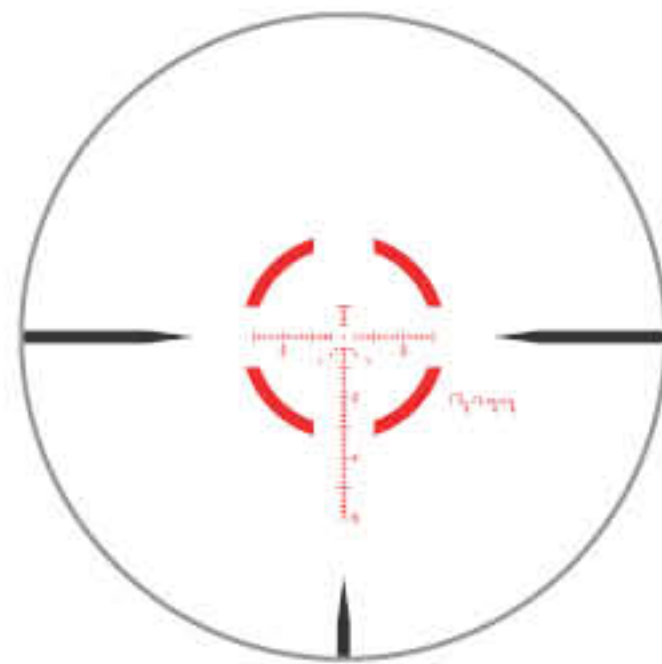


## A1 MOA

### **THE RIFLEMAN'S CQB IN MINUTES**

*Cover your bases no matter your target with this multi-disciplinary reticle.*

At 1X a T-Dot enclosed in a 68 MOA segmented circle makes closeup work quick and to the point. Illumination option included.

At higher magnifications with farther targets leverage the crisp 1 MOA center dot and up to 60 MOA in vertical holdover with hashmarks in 2 MOA increments. For even more precision use up to 30 MOA holds left or right and range estimation out to 600 yards.

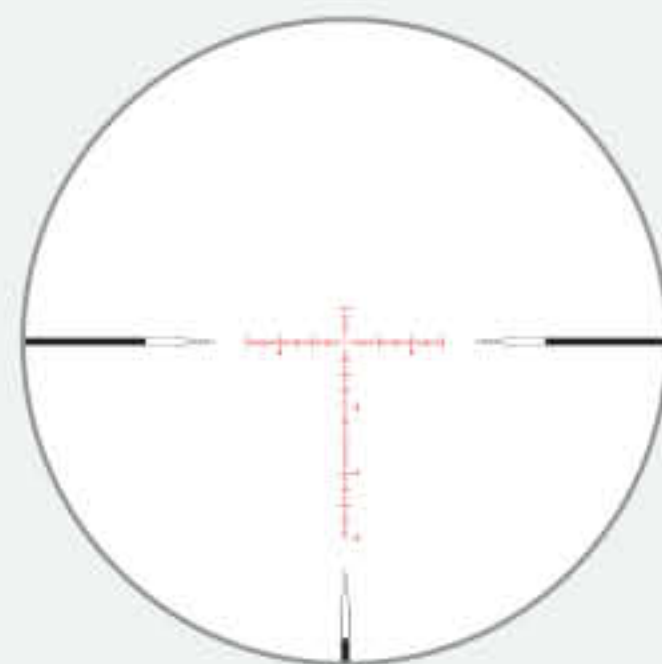


## A2 MOA

### **SIMPLE YET EFFECTIVE CROSSHAIRS**

*Honor the simplicity of the German Duplex while adding vertical and horizontal holds to always track your target.*

At 1X thick stadia lines taper to a fine point and a T-Dot with a 0.5 MOA center dot allows for simple quick acquisition. The T-Dot fully illuminates.

At higher magnifications make use of 70 MOA in vertical holds and 30 MOA left and right with hashmarks set in 1 MOA increments.

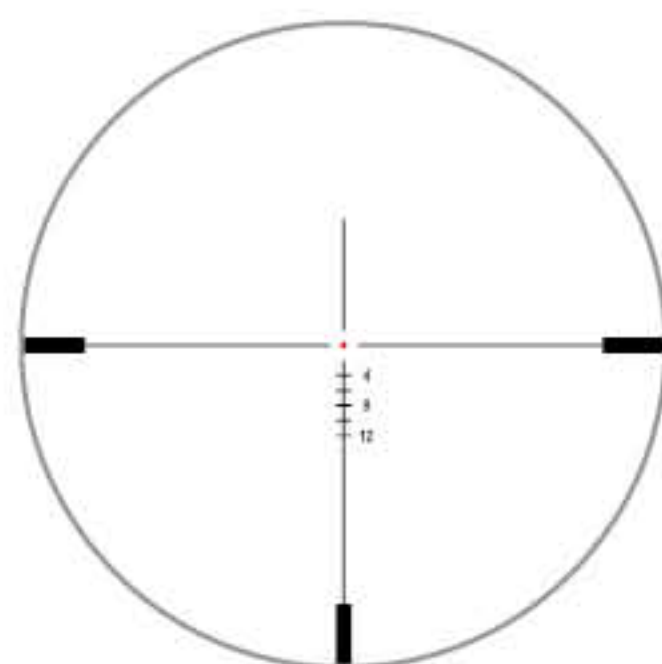


## A3 MOA

### **MORE THAN JUST THE WIRE**

*Keep it simple with the German 4-inspired A3 MOA reticle.*

At low magnifications horizontal stadia 2 MOA thick transition into thinner 1/4 MOA crosshairs. The 1 MOA center dot illuminates to provide precision without losing picture in low light.

Leverage minimalist MOA holdover marks out to 12 MOA to easily extend your shooting distance.

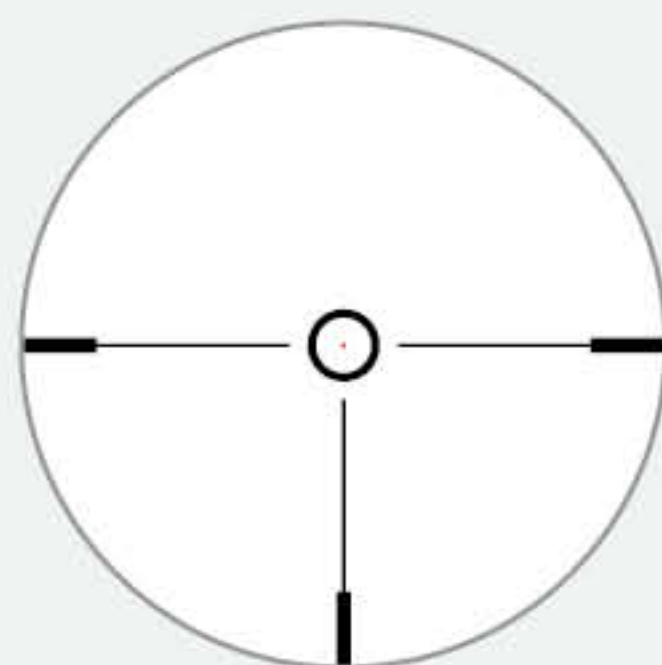


## A4 MOA

### **THE MARKSMAN'S APERTURE**

*Encircle your target with this minimal circle-dot reticle.*

Keep center using a floating 0.75 MOA dot and a 2 MOA thick circle with an 8 MOA inner diameter.



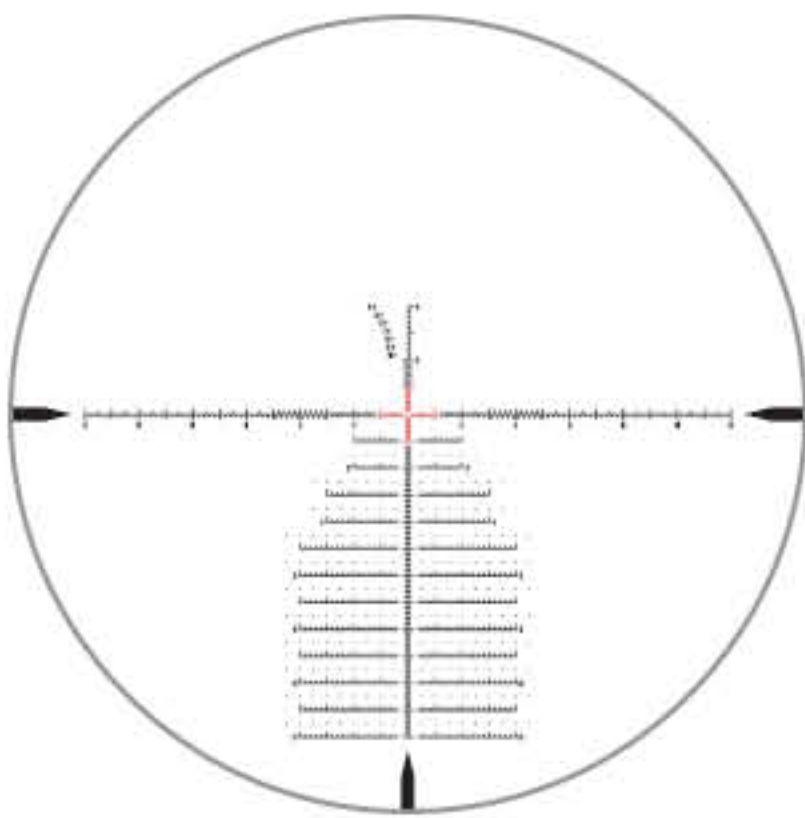

## M1 MRAD

### THE TRADITIONALIST'S PRECISION RETICLE

A patented Mil reticle with a 0.05 Mil center dot made for true marksmen looking to challenge themselves at ranges most could not reach. (U.S. Patents: <https://www.leapers.com/patents>)


**RETICLE HOLDOVERS:** Your reticle features 12 Mils of holdovers broken into 0.2 Mil increments for exact shot placement. Vertical and horizontal

stadia feature 1-2 Mils of 0.1 Mil increments for finer measurements.

**WIND HOLDS:** The main horizontal stadia include 24 Mil of wind holds with 2 Mils of 0.1 Mil increments on both sides. Do not be afraid to have fun in the wind with up to 4.5 Mils of wind holds.

**QUICK RANGING SYSTEM:** A quick-ranging system is built into the M1 reticle, able to range an 18-inch (46 cm) width target from 400 to 1,000 yards (366 to 914 m).

**ILLUMINATION:** The first Mil of the inner crosshairs are the only illuminated parts of the reticle, preserving visibility in low-light conditions.

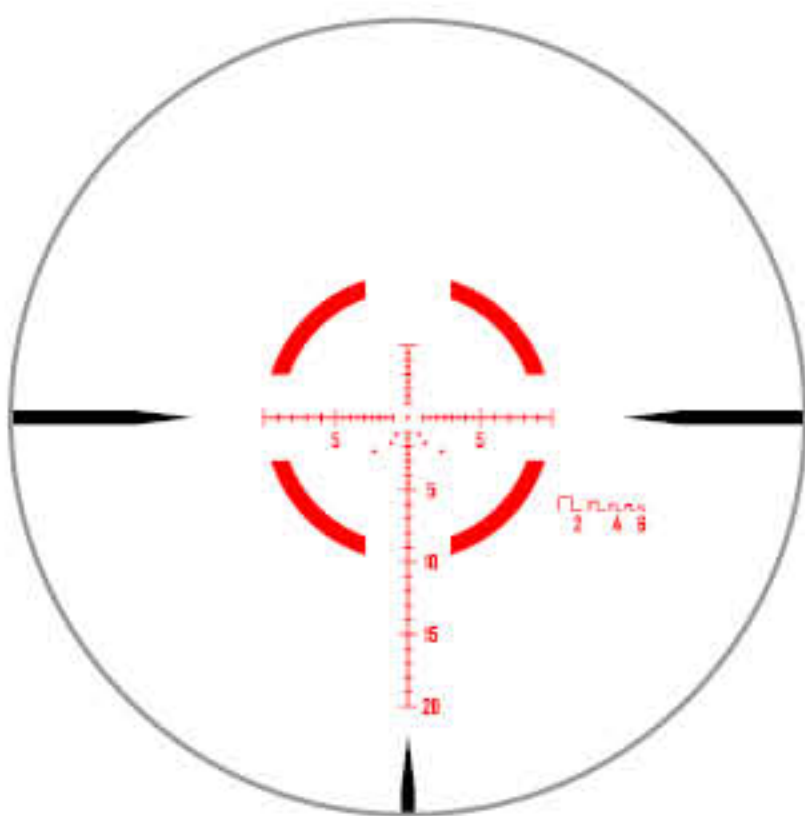

## M3 MRAD


### THE RIFLEMAN'S CQB IN MIL

*Cover your bases no matter your target with this multi-disciplinary reticle.*

At 1X a T-Dot enclosed in a 17.5 Mil segmented circle makes closeup work quick and to the point. Illumination option included.

At higher magnifications with farther targets leverage the crisp 0.3 Mil center dot and up to 20 Mils in vertical

holdover with hashmarks in 0.5 Mil increments out to 5 Mil and 1 Mil increments after that. For even more precision use up to 10 Mil holds left or right and range estimation out to 600 yards.

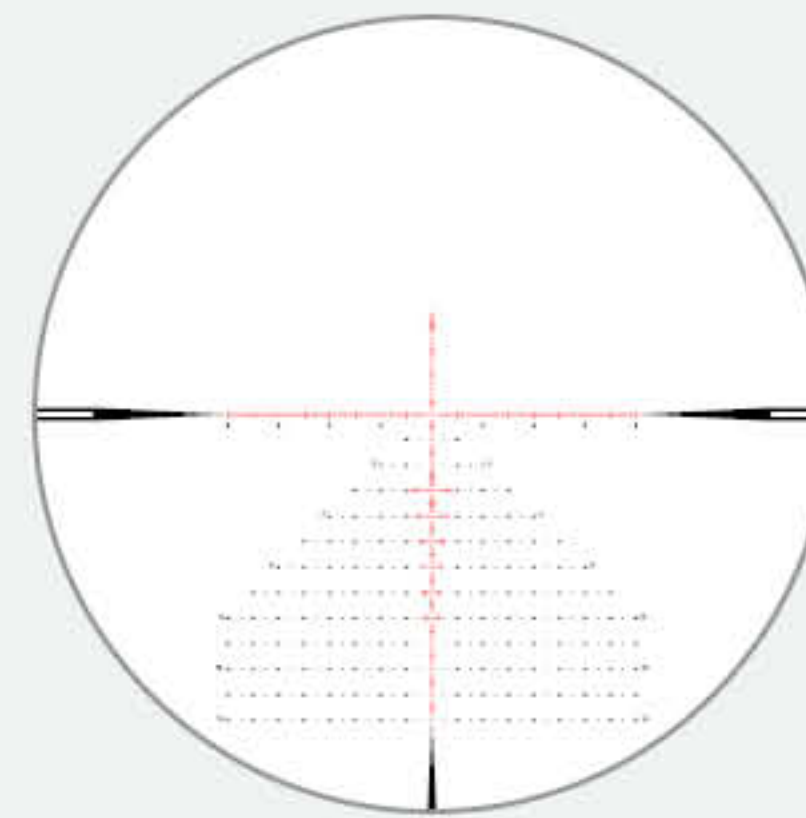

## M2 MRAD

### THE MODERN MINIMALIST PRECISION RETICLE

A patented clutter-free design with a 0.1 Mil floating donut. Made for the tactical marksman who wants to preserve his FOV. (U.S. Patents: <https://www.leapers.com/patents>)

**DONUT RETICLE:** A precise 0.1 Mil floating donut acts as your aiming point and is replicated throughout the main vertical stadia at 1 Mil increments. The hollow center allows you see the color of your target and the color change as it moves.

**RAPID RANGING SYSTEM:** Our innovative rapid-ranging brackets range from 300 yards (274 m) to 800 yards (732 m), made for targets of varying widths: 6-9 inches (15-23 cm) or 12-18 inches (30-46 cm). Markings at 18, 16, 14, and 12 inches (46, 41, 36, and 30 cm) as well as halfway points allow for even finer measurement.

**HOLDOVERS:** Leverage 12 Mil of holdover and maximize field of view with a wide-open top half which includes another 4 Mils of hold-under. Main crosshairs have 0.2 Mil increments with 0.5 Mil markings at the center of each segment. Additionally both directions feature 2 Mils of 0.1 Mil increments for finer measurements.

**WIND HOLDS:** Floating donut wind holds are spaced in 1 Mil increments up to 8 Mils left or right, complemented by 0.05 Mil dots for 0.5 Mil holds. Wind holds feature 0.1 Mil wings to help your eye follow the line of donuts, while giving you space to see your impacts.

**ILLUMINATION:** The main crosshairs and ranging brackets are the only illuminated parts of the reticle, enhancing visibility in low-light conditions.

*(Refer to pg. 056-061 for Detailed Reticle Info.)*





# **INTEGRIX<sup>®</sup>**

## **INTEGRATED MANUFACTURING**

### **92% LIGHT TRANSMISSION**

We deliver over 92% light transmission on all INTEGRIX<sup>®</sup> scopes, measured and verified by precision instrumentation to guarantee we hit our optical design parameters.

### **INDUSTRY-LEADING GLASS**

INTEGRIX<sup>®</sup> uses premium German SCHOTT and Japanese OHARA glass, the leaders in craftsmanship and high-definition image quality. Each lens is multi-coated to reduce glare and reflection and maximize light.

### **EXACTING STANDARDS**

All lenses are individually cleaned and centration tested prior to and after assembly under Class 100 ISO5 Clean Room conditions. We require quality control within all subsystems to ensure INTEGRIX<sup>®</sup> delivers top image specifications.

### **OPTIMAL MTF & IMAGE QUALITY**

A balanced, high-quality image on and off-axis ensures you have contrast and resolution edge-to-edge. Our MTF (Modulation Transfer Function) measurement process was refined in-house and uses an advanced collimator system along with the USAF 1951 military standard resolution test for magnifications 6X and lower, switching to the XJ-6 image for higher magnifications. We measure contrast so we can resolution and definitively match or beat the best benchmarks.

### **TIRELESS OPTICAL DESIGN**

It took us 5 years to find the right people and fine-tune our optical designs with over 200 simulations for a single SKU. We balance our design to find the optimal lens system by maximizing light transmission and minimizing spherical, comatic, and chromatic aberrations and distortion, astigmatism, and field curvature inconsistencies in your image.



## INTELLIGENT MECHANICAL DESIGN

From our hassle-free patented Zero Stop to the exact torque of an individual turret's tactile click, INTEGRIX® mechanical designs have a shooter's attention to detail. Housed within a 34 mm tube for extra adjustment range, our erector tube systems are machined and verified to embody precision below a 5 micron tolerance of concentricity.

## EXHAUSTIVE TESTING REGIMEN

All INTEGRIX® scopes are .338 Lapua Magnum rated with an extra round of bidirectional recoil testing and collimator confirmation before passing to production. Nitrogen-purged, fogproof, and waterproof, our scopes are regularly run through IPX7 waterproof verification and Four Corners Environmental Testing from -40°C to 70°C.







# INTEGRIX®

## IX8 1-8X28 LPVO SCOPE

A popular choice for the AR15 platform and similar carbines, the INTEGRIX 1-8X28 LPVO has a true 1X with a wide and clear FOV for dynamic and on-the-move close to medium range engagements. Magnification out to 8X allows for flexibility in crossover applications. Available in FFP with a CQB reticle in Mil or MOA, or a simple dot crosshairs in SFP.




# **IX<sup>TM</sup> 8** 1-8X28 LPVO FFP/SFP SCOPE



## **INTEGRIX® IX8 1-8X28 LPVO FFP/SFP SCOPE** NEW



[Refer to pg. 056-061 for Detailed Reticle Info.]

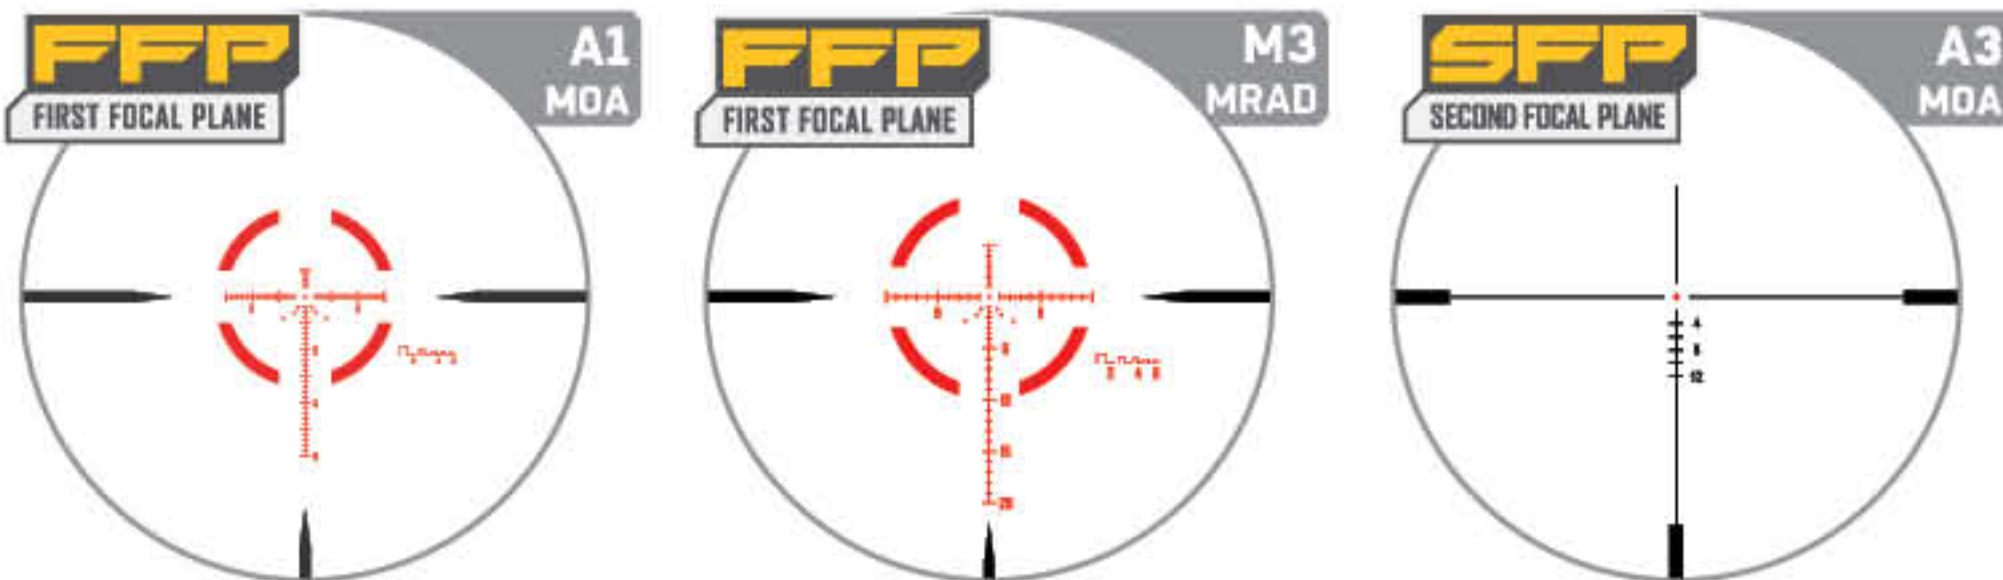

	IX801FM3	IX801FA1	IX801SA3
<i>Focal Plane</i>	FFP		SFP
<i>Reticle</i>	Etched Glass M3 MRAD	Etched Glass A1 MOA	Etched Glass A3 MOA
<i>Illumination</i>	Red & Green, 10 Brightness Settings		
<i>Magnification</i>	1–8X		
<i>Tube Diameter</i>	34 mm		
<i>Objective Diameter</i>	28 mm		
<i>Angular FOV</i>	21.8°–2.7°		
<i>Linear FOV @ 100 yds</i>	115.5–14.1 ft		
<i>Linear FOV @ 100 m</i>	38.5–4.7 m		
<i>Turret Type</i>	Uncapped Pull to Unlock, Push to Lock		
<i>Elevation Travel</i>	32.5 MRAD (Up 19 MRAD, Down 13.5 MRAD)	100 MOA (Up 60 MOA , Down 40 MOA)	
<i>Windage Travel</i>	10 MRAD	50 MOA	
<i>Travel Per Revolution</i>	10 MRAD	50 MOA	
<i>Click Value</i>	0.1 MRAD	1/2 MOA	
<i>Eye Relief</i>	3.74 in (95 mm)		
<i>Exit Pupil</i>	10–3.5 mm		
<i>Diopter</i>	–3D to +2D		
<i>Parallax</i>	Fixed @ 100 yds (91.4 m)		
<i>Length</i>	10.91 in (277 mm)		
<i>Weight</i>	25.3 oz (716 g)		
<i>Battery Type</i>	CR2032 3V		



A man wearing a black t-shirt, a black cap with sunglasses, and large black earplugs is aiming a black rifle. The rifle is equipped with a large, black, cylindrical scope. He is positioned behind a wooden shooting bench. The background shows a wooden structure with large windows overlooking a green field. The rifle has a black magazine and a black trigger guard. The scope has a black body and a black objective lens. The man is looking through the scope with a focused expression. The rifle is resting on the wooden bench. The background is slightly out of focus, showing a wooden fence and some trees. The overall scene is a professional shooting range environment.

# INTEGRIX®

## ix6 3-18X44 MID POWER SCOPE

The INTEGRIX® ix6 3-18X44 reaches beyond your traditional 3-15X magnification range for more distance in a compact package. An ideal competition choice for mid-to-long range targets, the 34 mm tube allows for extra adjustment range. Available in the simpler A2 crosshairs in minutes or the M1 Mil precision reticle. Suited for PRS competition, mid-to-long range shooting, or hunting when you require next-level precision and low light visibility.







# 3-18X44 MID POWER FFP SCOPE



## INTEGRIX® IX6 3-18X44 MID POWER FFP SCOPE **NEW**



(Refer to pg. 056-061 for Detailed Reticle Info.)

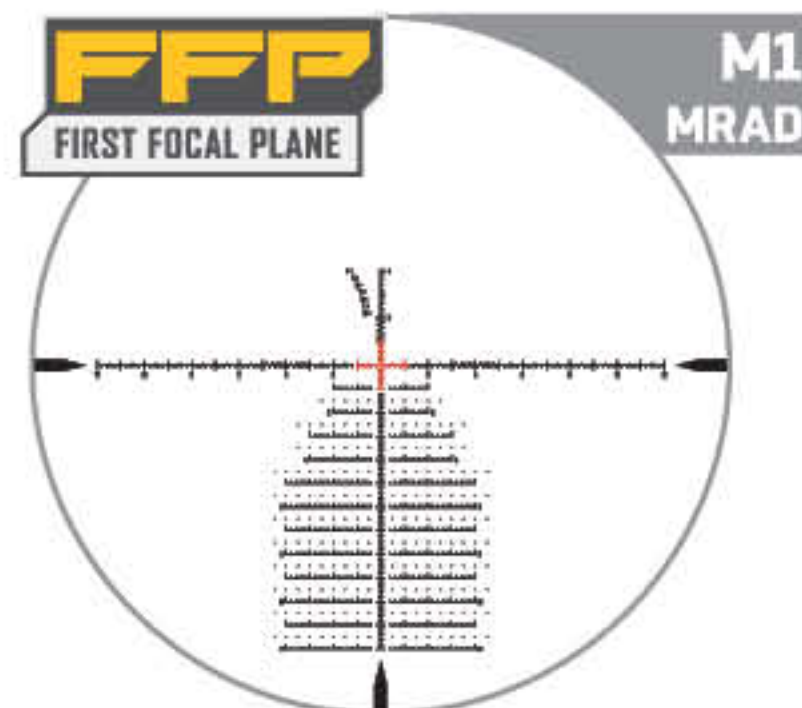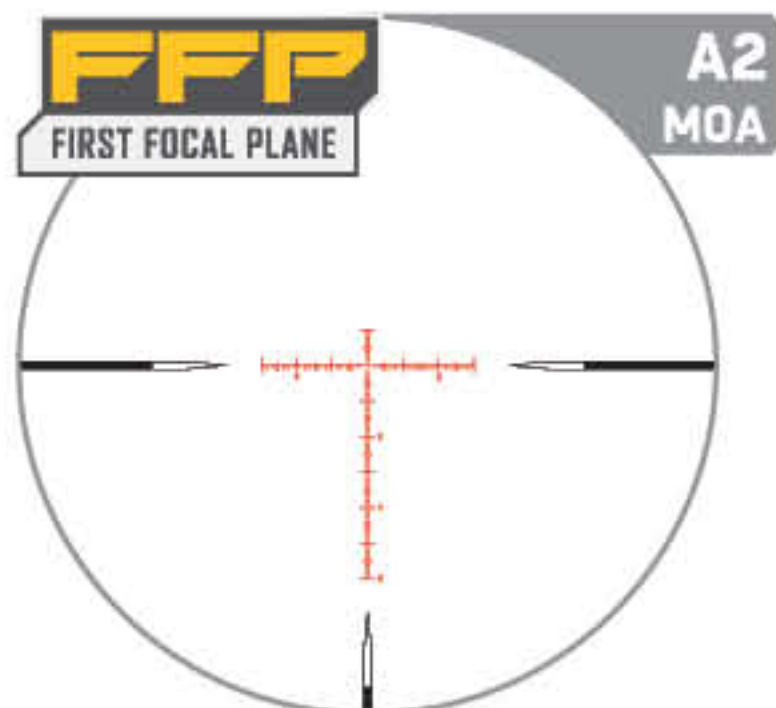

	IX603FA2	IX603FM1
<b>Focal Plane</b>	FFP	
<b>Reticle</b>	Etched Glass A2 MOA	Etched Glass M1 MRAD
<b>Illumination</b>	Red & Green, 8 Brightness Settings	
<b>Magnification</b>	3-18X	
<b>Tube Diameter</b>	34 mm	
<b>Objective Diameter</b>	44 mm	
<b>Angular FOV</b>	7.2°-1.2°	
<b>Linear FOV @ 100 yds</b>	37.7-6.3 ft	
<b>Linear FOV @ 100 m</b>	12.6-2.1 m	
<b>Turret Type</b>	Uncapped Pull to Unlock, Push to Lock with Zero Stop	
<b>Elevation Travel</b>	90 MOA (Up 60 MOA, Down 30 MOA)	32.5 MRAD (Up 19 MRAD, Down 13.5 MRAD)
<b>Windage Travel</b>	48 MOA	14 MORAD
<b>Travel Per Revolution</b>	24 MOA	10 MRAD
<b>Click Value</b>	1/4 MOA	0.1 MRAD
<b>Eye Relief</b>	3.94 in (100 mm)	
<b>Exit Pupil</b>	11-2.5 mm	
<b>Diopter</b>	-3D to +2D	
<b>Parallax</b>	30 yds (27.4 m)-∞	
<b>Length</b>	11.89 in (302 mm)	
<b>Weight</b>	29.7 oz (841 g)	
<b>Battery Type</b>	CR2032 3V	





# INTEGRIX®

## IX6 4.5-27X56 LR/ELR SCOPE

The INTEGRIX® IX6 4.5-27X56 modernizes the 5-25X magnification to offer even greater versatility for long range engagements. Its large objective lens and 34 mm tube allow for maximum light and clarity in low light conditions and travel in your W/E adjustment. Available in two different precision reticles, the IX6 4.5-27X56 is a well-rounded optic for the advanced long-range marksman.





# **X**<sup>TM</sup> 6 4.5-27X56 LR/ELR FFP SCOPE



## INTEGRIX® ix6 4.5-27X56 LR/ELR FFP SCOPE **NEW**



(Refer to pg. 056-061 for Detailed Reticle Info.)

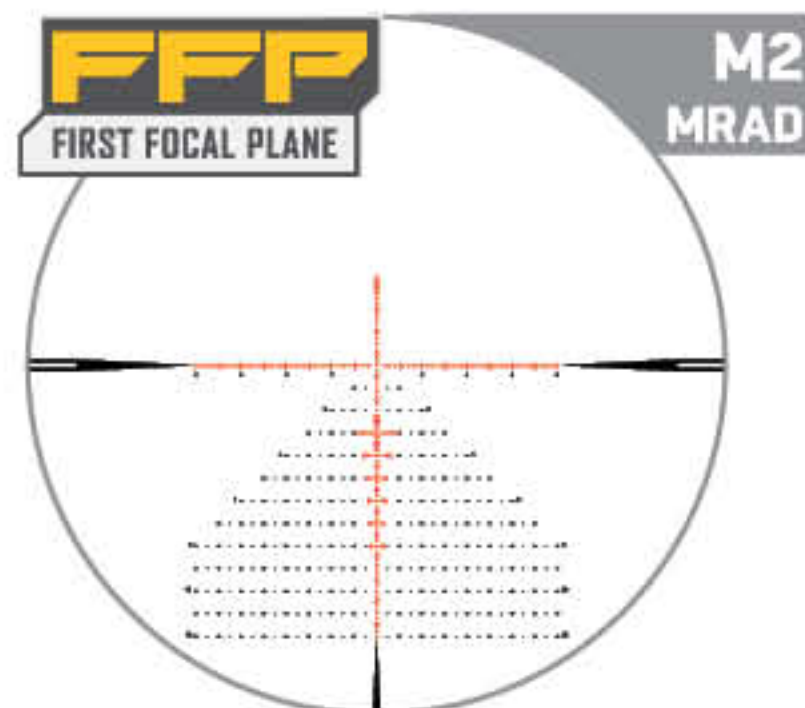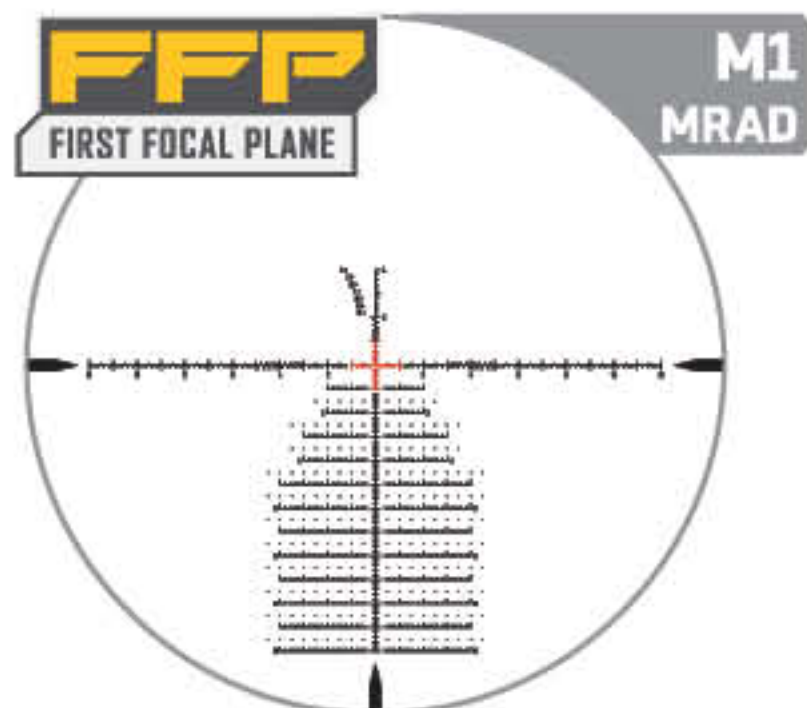

	IX645FM1	IX645FM2
<i>Focal Plane</i>	FFP	
<i>Reticle</i>	Etched Glass M1 MRAD	Etched Glass M2 MRAD
<i>Illumination</i>	Red & Green, 8 Brightness Settings	
<i>Magnification</i>	4.5-27X	
<i>Tube Diameter</i>	34 mm	
<i>Objective Diameter</i>	56 mm	
<i>Angular FOV</i>	4.8°-0.8°	
<i>Linear FOV @ 100 yds</i>	25.1-4.2 ft	
<i>Linear FOV @ 100 m</i>	8.4-1.4 m	
<i>Turret Type</i>	Uncapped Pull to Unlock, Push to Lock with Zero Stop	
<i>Elevation Travel</i>	32.5 MRAD (Up 19 MRAD, Down 13.5 MRAD)	
<i>Windage Travel</i>	14 MRAD	
<i>Travel Per Revolution</i>	10 MRAD	
<i>Click Value</i>	0.1 MRAD	
<i>Eye Relief</i>	3.94 in (100 mm)	
<i>Exit Pupil</i>	11-2.1 mm	
<i>Diopter</i>	-3D to +2D	
<i>Parallax</i>	30 yds (27.4 m) - ∞	
<i>Length</i>	14.13 in (359 mm)	
<i>Weight</i>	33.7 oz (956 g)	
<i>Battery Type</i>	CR2032 3V	





# INTEGRIX

## ix6 6-36X56 LR/ELR SCOPE

Extending the INTEGRIX® ELR offering,, the ix6 6-36X56 boasts an industry-leading FOV and ultra-fine parallax adjustment knob from 10 yards out to infinity. Paired with the signature INTEGRIX® 34 mm tube for maximum W/E travel and lens system designed for 92% light transmission, this ix6 is available in two different precision reticles and is the ideal choice for the professional marksman looking to perfect their precision shooting long range.





# IX<sup>TM</sup> 6 6-36X56 LR/ELR FFP SCOPE



## INTEGRIX® IX6 6-36X56 LR/ELR FFP SCOPE **NEW**



(Refer to pg. 056-061 for Detailed Reticle Info.)

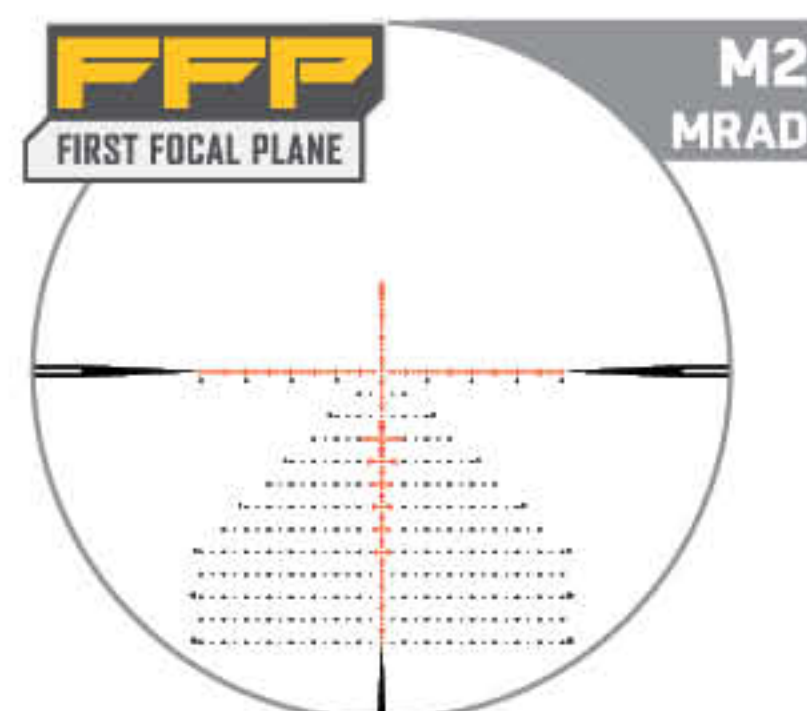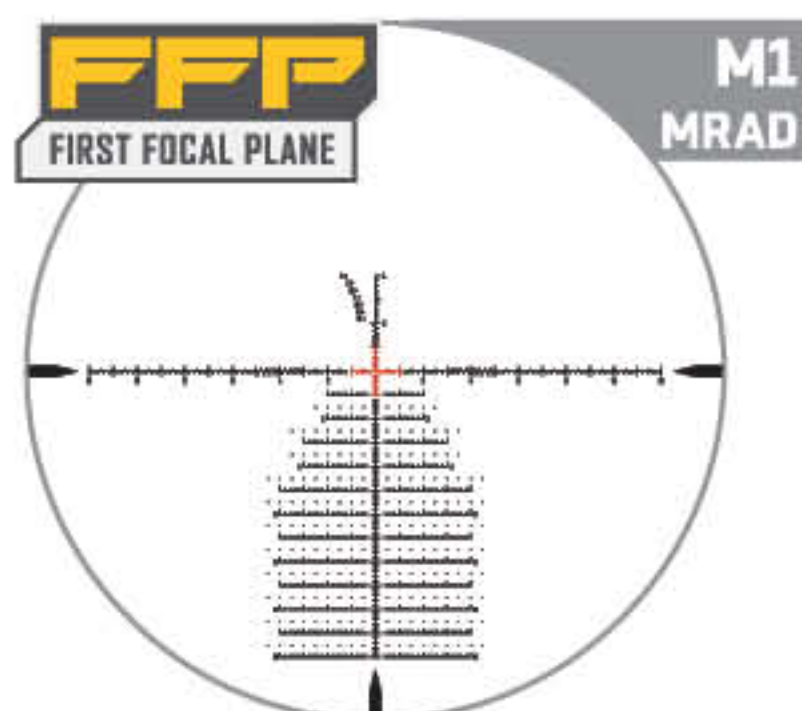

	IX606FM1	IX606FM2
<i>Focal Plane</i>	FFP	
<i>Reticle</i>	Etched Glass M1 MRAD	Etched Glass M2 MRAD
<i>Illumination</i>	Red & Green, 8 Brightness Settings	
<i>Magnification</i>	6-36X	
<i>Tube Diameter</i>	34 mm	
<i>Objective Diameter</i>	56 mm	
<i>Angular FOV</i>	4.3°-0.7°	
<i>Linear FOV @ 100 yds</i>	22.5-3.9 ft	
<i>Linear FOV @ 100 m</i>	7.5-1.3 m	
<i>Turret Type</i>	Uncapped Pull to Unlock, Push to Lock with Zero Stop	
<i>Elevation Travel</i>	32.5 MRAD (Up 19 MRAD, Down 13.5 MRAD)	
<i>Windage Travel</i>	14 MRAD	
<i>Travel Per Revolution</i>	10 MRAD	
<i>Click Value</i>	0.1 MRAD	
<i>Eye Relief</i>	3.54 in (90 mm)	
<i>Exit Pupil</i>	9.2-1.6 mm	
<i>Diopter</i>	-3D to +2D	
<i>Parallax</i>	10 yds (10 m)-∞	
<i>Length</i>	15.08 in (383 mm)	
<i>Weight</i>	39.5 oz (1021 g)	
<i>Battery Type</i>	CR2032 3V	





# INTEGRIX

## IXF 4.5X28 SERVICE RIFLE SCOPE

The Competition iXF Fixed 4.5X28 is a special edition Service Rifle scope designed to give you the edge in across the course shooting from CMP Service Rifle to NRA High Power competition. The optimized lens system allows for maximum FOV and clarity in low light conditions, with a 34 mm tube for greater W/E travel. Parallax is set at 200 yards with an optional threaded lens reducer.





# 4.5X28 SERVICE RIFLE SFP SCOPE



## INTEGRIX® IXF 4.5X28 SERVICE RIFLE SFP SCOPE **NEW**



(Refer to pg. 056-061 for Detailed Reticle Info.)



	IXF45SA3	IXF45SA4
<i>Focal Plane</i>	SFP	
<i>Reticle</i>	Etched Glass A3 MOA	Etched Glass A4 MOA
<i>Illumination</i>	Red & Green, 8 Brightness Settings	
<i>Magnification</i>	4.5X	
<i>Tube Diameter</i>	34 mm	
<i>Objective Diameter</i>	28 mm	
<i>Angular FOV</i>	5.72°	
<i>Linear FOV @ 100 yds</i>	30 ft	
<i>Linear FOV @ 100 m</i>	10 m	
<i>Turret Type</i>	Uncapped Competition Turret	
<i>Elevation Travel</i>	120 MOA (Up 60 MOA, Down 60 MOA)	
<i>Windage Travel</i>	120 MOA	
<i>Travel Per Revolution</i>	24 MOA	
<i>Click Value</i>	1/4 MOA	
<i>Eye Relief</i>	3.7 in (94 mm)	
<i>Exit Pupil</i>	6.2 mm	
<i>Diopter</i>	-3D to +2D	
<i>Parallax</i>	Fixed @ 200 yds (182.9 m)	
<i>Length</i>	9.05 in (230 mm)	
<i>Weight</i>	18.3 oz (520 g)	
<i>Battery Type</i>	CR2032 3V	



# ACCUSHOT PRO™

For any shooter planning their next performance build, your choice in optic can take priority over the rifle itself. ACCUSHOT PRO™ optics are the smart choice for the discerning sportsman looking to level up their performance and equipment, from tactical competition to cross-disciplinary hunting.

ACCUSHOT PRO™ riflescopes are derived from high-performance INTEGRIX® DNA to offer performance-driven build quality and features, at an entry point accessible to the serious shooter. In this manner, balance is achieved from design, manufacturing, to performance downrange.

ACCUSHOT PRO™ is the natural progression of legacy UTG® optics loved by plinkers and hunters alike. Cut out the unknowns and make the investment in your equipment to solidify your performance. **THIS IS ACCUSHOT PRO™.**



**TAKE IT UP A NOTCH.  
LEVEL UP YOUR PERFORMANCE.  
IT ALL STARTS WITH YOUR OPTIC.**







# ACCUSHOT PRO™

## LEVEL UP YOUR PERFORMANCE.

### LOW POWER [LPVO] SCOPE

**AS6 1-6X24 FFP** *(pg. 036-037)*

Ultra compact, AS6 1-6X24 is the first ACCUSHOT PRO™ LPVO to hit the market. Magnification runs from a true 1X to 6X for quick, comfortable target acquisition even at maximum magnification. Suitable for dynamic training or competition across close-to-medium range engagements.

### LOW TO MID POWER SCOPE

**AS3 3-9X36 FFP** *(pg. 038-039)*

The follow up to its UTG® Bug Buster predecessor, the ACCUSHOT PRO™ AS3 3-9X36 has a revolutionary compact size for its short-to-medium magnification range. Ideal for bolt-action hunting applications and dynamic AR builds.

### MID POWER SCOPE

**AS6 3-12X42 FFP** *(pg. 040-041)*

Rounding out the initial ACCUSHOT PRO™ offering, the AS6 3-12X42 is a classic mid power optic designed for competition, DMR training, and common hunting applications. Lockable tactile turrets ensure you never lose your zero.





# FEATURES



## WIDE OPEN FOV

Wide field of view to maximize the information seen around your targets and the immediate environment.



## OVER 90% LIGHT TRANSMISSION

Over 90% light transmission for the best visibility across mirage and low light conditions.



## EDGE-TO-EDGE CLARITY & CONTRAST

Clear high-contrast picture on-axis and off-axis to discern details about your target across your FOV.



## CONSTANT EYE RELIEF

Constant and comfortable eye box for easy target acquisition, even at high magnification.



## RED/GREEN ILLUMINATION

Red and green illumination with 8 brightness intensities and 12 hour auto shutoff.

# RIGOROUS TESTING




## EXTREME CLIMATE PROOF

24 hours of Four Corners environmental testing from -40°C to 70°C at low and high humidity.



## IPX7 WATERPROOF

Fully waterproof with no fog or leaks at 100% water submersion for 30 minutes at 1 meter depth.



## OPTIMIZED OPTICAL DESIGN

Optimized optical design for reduced aberrations and well-balanced image quality.



## .338 LAPUA MAGNUM RATED

Recoil endurance over 300+ rounds of .338 Lapua Magnum, validated every 100 rounds.



## .30 CAL SPRINGER AIR GUN RATED

Recoil endurance with 300+ rounds through a hatsan .30 Cal carnivore for twice the validation.





# ACCUSHOT PRO™

## AS6 1-6X24 LPVO

The compact AS6 1-6X24 LPVO runs from a true 1X to 6X for quick, comfortable target acquisition even at maximum magnification. Suitable for your AR, AK, or general-purpose rifle in close-to-medium range engagements with a range of CQB and holdover reticles depending on your training needs.




# AS6 1-6X24 LPVO FFP SCOPE

WWW.LEAPERS.COM | SINCE 1992



## ACCUSHOT PRO™ AS6 1-6X24 LPVO FFP SCOPE NEW

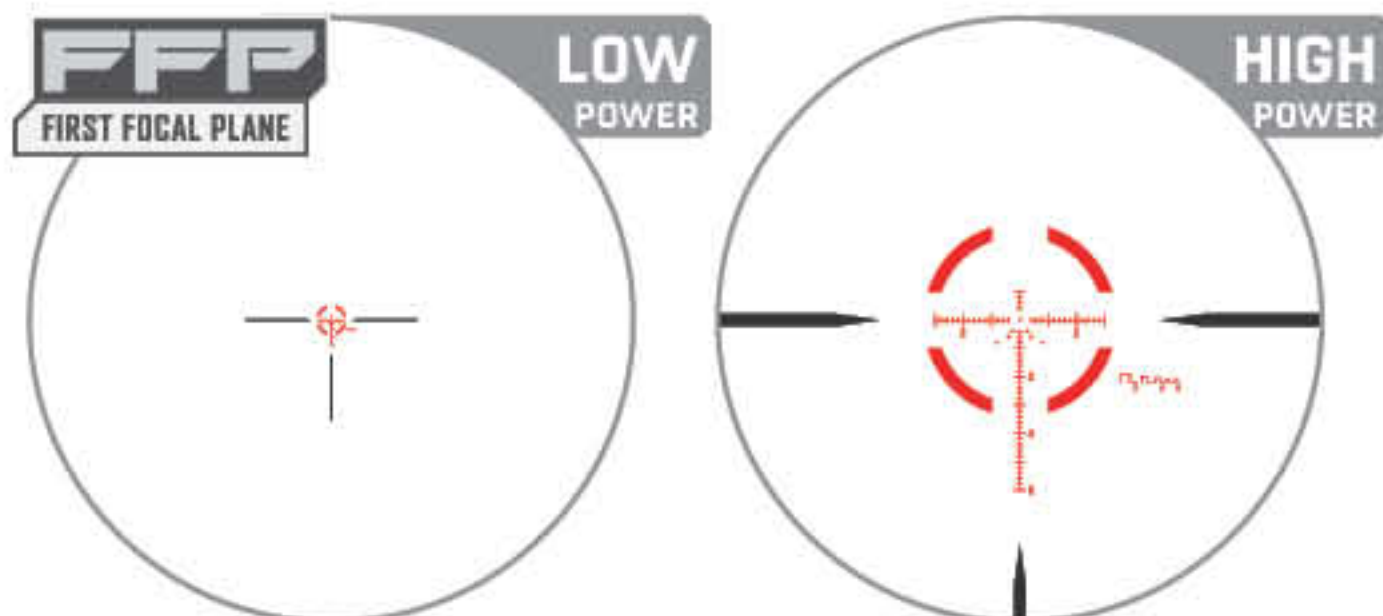

### A1 MOA

#### THE RIFLEMAN'S CQB IN MINUTES

Cover your bases no matter your target with this multi-disciplinary reticle.

(Refer to pg. 056-061 for Detailed Reticle Info.)

	AS601FA1
Focal Plane	FFP
Reticle	Etched Glass A1 MOA
Illumination	Red & Green, 10 Brightness Settings
Magnification	1-6X
Tube Diameter	34 mm
Objective Diameter	24 mm
Angular FOV	21.8°-3.6°
Linear FOV @ 100 yds	115.5-18.9 ft
Linear FOV @ 100 m	38.5-6.3 m
Elevation Travel	100 MOA (Up 60 MOA, Down 40 MOA)
Windage Travel	40 MOA
Travel Per Revolution	40 MOA
Click Value	1/2 MOA
Eye Relief	3.54 in (90 mm)
Exit Pupil	9.5-4.0 mm
Diopter	-3D to +2D
Parallax	Fixed @ 100 yds (91.4 m)
Length	10.00 in (255 mm)
Weight	22.6 oz (642 g)
Battery Type	CR2032 3V





**ACCUSHOT PRO™**

**LOW TO MID POWER AS3 3-9X36**

The ultimate graduation for the legacy UTG® BUG BUSTER® line, the ACCUSHOT PRO™ AS3 3-9X36 upholds a revolutionary compact size within its magnification range while upgrading light transmission, precision, and image quality. Ideal for bolt-action hunting applications and dynamic AR builds.



# AS3 3-9X36 LOW TO MID POWER FFP SCOPE

WWW.LEAPERS.COM | SINCE 1992



## ACCUSHOT PRO™ AS3 3-9X36 LOW TO MID POWER FFP SCOPE NEW



OVER 90% LIGHT TRANSMISSION



WIDE OPEN FIELD OF VIEW



3.54" CONSTANT EYE RELIEF





EXTREME CLIMATE PROOF



12 HOUR AUTO SHUTOFF



.338 LAPUA MAGNUM RATED

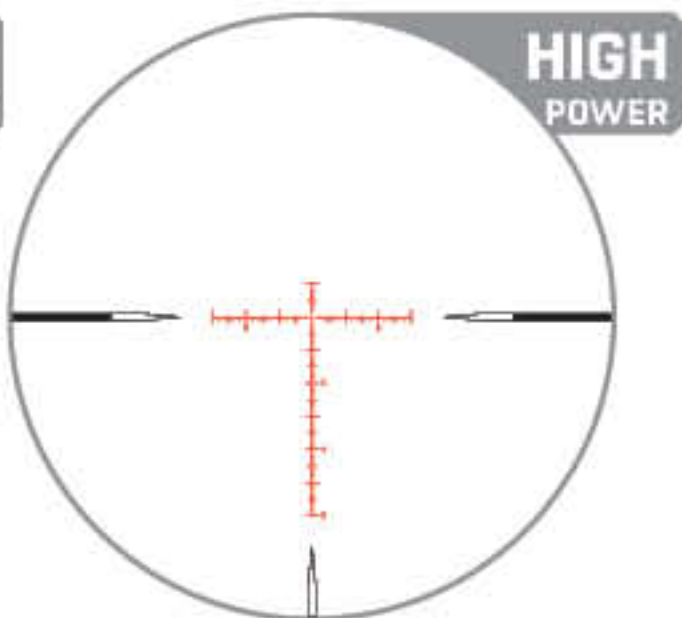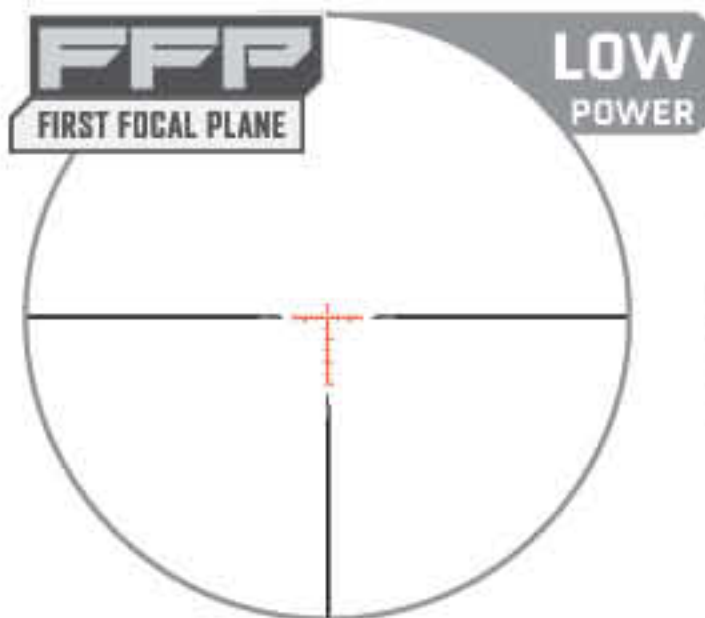

### A2 MOA

#### SIMPLE YET EFFECTIVE CROSSHAIRS

Honor the simplicity of the German Duplex while adding vertical and horizontal holds to always track your target.

(Refer to pg. 056-061 for Detailed Reticle Info.)

	AS303FA2
Focal Plane	FFP
Reticle	Etched Glass A2 MOA
Illumination	Red & Green, 8 Brightness Settings
Magnification	3-9X
Tube Diameter	34 mm
Objective Diameter	36 mm
Angular FOV	7.4°-2.47°
Linear FOV @ 100 yds	38.8-12.9 ft
Linear FOV @ 100 m	12.9-4.3 m
Elevation Travel	100 MOA (Up 60 MOA, Down 40 MOA)
Windage Travel	48 MOA
Travel Per Revolution	20 MOA
Click Value	1/4 MOA
Eye Relief	3.54 in (90 mm)
Exit Pupil	12-4 mm
Diopter	-3D to +2D
Parallax	10 yds (9.14 m)-∞
Length	9.4 in (239 mm)
Weight	21.9 oz (620 g)
Battery Type	CR2032 3V



A person wearing a camouflage t-shirt, a camouflage baseball cap, and tan pants is seen from behind, holding a rifle. The rifle is equipped with a large, black, multi-turreted scope. The person is standing in a forest with sunlight filtering through the trees. The rifle is held vertically, with the barrel pointing upwards.

# ACCUSHOT PRO™

## MID POWER AS4 3-12X42


The AS6 3-12X42 is a classic mid power optic suitable for common hunting applications, competition, or DMR training. A well-optimized lens system ensures 90% light transmission with fine-tuned clarity and visibility in low light conditions. Lockable tactile turrets ensure you never lose your zero.



# AS4 3-12X42 MID POWER FFP SCOPE



## ACCUSHOT PRO™ AS4 3-12X42 MID POWER FFP SCOPE NEW

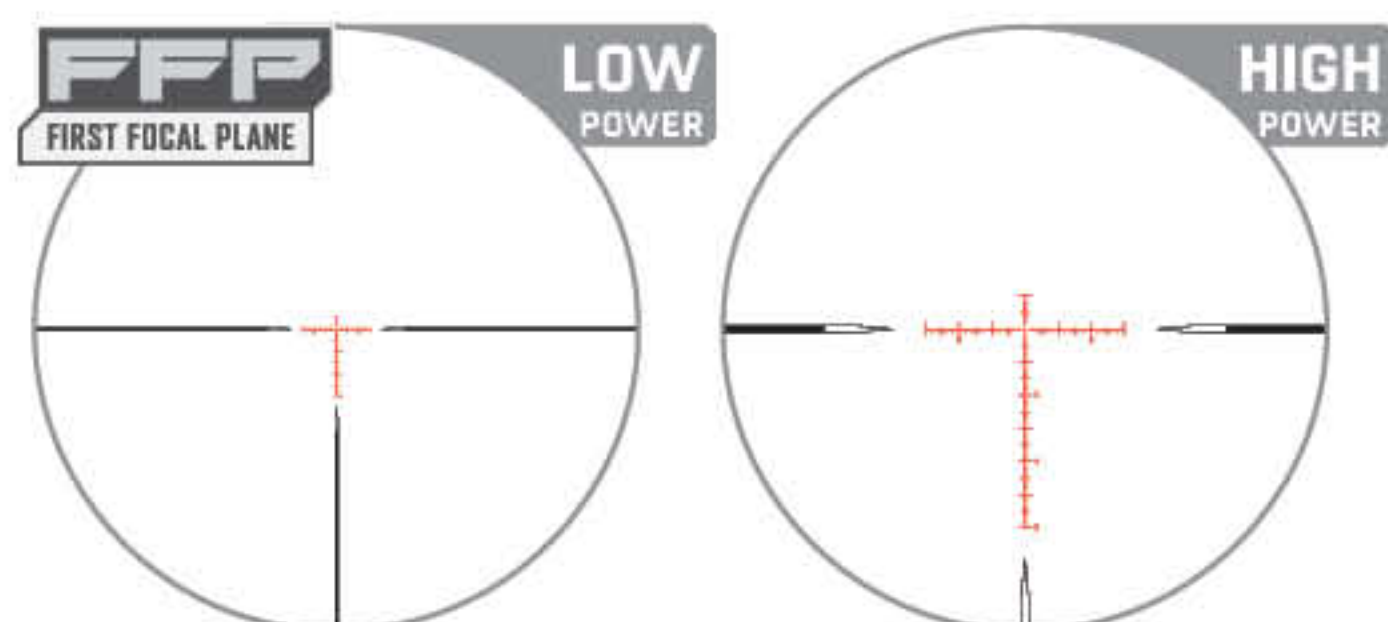

### A2 MOA

#### SIMPLE YET EFFECTIVE CROSSHAIRS

Honor the simplicity of the German Duplex while adding vertical and horizontal holds to always track your target.

(Refer to pg. 056-061 for Detailed Reticle Info.)

	AS403FA2
Focal Plane	FFP
Reticle	Etched Glass A2 MOA
Illumination	Red & Green, 8 Brightness Settings
Magnification	3-12X
Tube Diameter	34 mm
Objective Diameter	42 mm
Angular FOV	7.4°-1.85°
Linear FOV @ 100 yds	38.8-9.7 ft
Linear FOV @ 100 m	12.9-3.2 m
Elevation Travel	100 MOA (Up 60 MOA, Down 40 MOA)
Windage Travel	48 MOA
Travel Per Revolution	20 MOA
Click Value	1/4 MOA
Eye Relief	3.43 in (87 mm)
Exit Pupil	10-3.5 mm
Diopter	-3D to +2D
Parallax	10 yds (9.14 m)-∞
Length	10.1 in (256 mm)
Weight	24.7 oz (701 g)
Battery Type	CR2032 3V



# UTG®

Our grassroots brand has been a constant in the marketplace and in the hands of shooting enthusiasts since our establishment over 30 years ago. From the days of plinking with our first 10/22 to the present, UTG® scopes have been a common go-to for affordable hunting and shooting sports optics that deliver complete solutions out-of-the-box.

Known by many of our customers, the proven TRUE STRENGTH® platform, an advanced sealed recoil system at the core of every UTG® scope, provides legendary shockproof, fogproof, and rainproof performance. Shooters who find value in application-specific features, but within a large variety to choose from look to UTG®, an essential collection and foundation that continues to pave the way for the new and the experienced.



THE GRASSROOTS EVERYDAY CHOICE.  
COMPLETE SOLUTIONS OUT-OF-THE-BOX.  
UNBEATABLE VALUE. THIS IS UTG®.



# OPTICS SOLUTIONS END-TO-END

## OP3 SCOPES *(pg. 044-045)*

3-12X44 / 30 MM / UMOA / SFP  
4-16X44 / 30 MM / UMOA / SFP



## SCP3 SCOPES *(pg. 046-047)*

1-8X28 / 30 MM / BG4 / SFP  
3-12X44 / 30 MM / MIL-DOT / SFP  
4-16X44 / 30 MM / MIL-DOT / SFP



## BUG BUSTER® SCOPES *(pg. 048-049)*

3-9X32 / 1" / MIL-DOT / SFP  
3-12X32 / 1" / MIL-DOT / SFP



## TRUE HUNTER® SCOPES *(pg. 050-051)*

4X32 / 1" / MIL-DOT / SFP  
3-9X40 / 1" / MIL-DOT / SFP  
4-16X40 / 1" / MIL-DOT / SFP  
6-24X50 / 1" / MIL-DOT / SFP



## CROSSBOW SCOPES *(pg. 052-053)*

4X32 / 1" / PRO 5-STEP / SFP  
1.5-6X36 / 30 MM / 130 HUNTER BDC / SFP



## LONG EYE RELIEF SCOPES *(pg. 054-055)*

2-7X44 / 30 MM / MIL-DOT / SFP  
2-7X32 / 1" / PDC / SFP







## OP3 SCOPES

The UTG® OP3 line features updated low profile, locking set screw turrets with a matching MOA reticle and lockable diopter. Ideal for hunting with a 30 mm tube, the OP3 platform and its reinforced durability turret mechanism has 3-12X44 and 4-16X44 models with an additional 1.5-6X36 in our crossbow offering.



# UTG® OP3 SCOPES



**3-12X44 / SFP / 30 MM**  
**ETCHED GLASS UMOA / IE® 36-COLOR**  
 / OP3-GM3124UM0A

**4-16X44 / SFP / 30 MM**  
**ETCHED GLASS UMOA / IE® 36-COLOR**  
 / OP3-GM4164UM0A

US PAT. 8437079, EU PAT. EP2520894  
 (Refer to pg. 056-061 for Detailed Reticle Info.)

	OP3-GM3124UM0A	OP3-GM4164UM0A
<i>Focal Plane</i>	SFP	SFP
<i>Magnification</i>	3-12X	4-16X
<i>Objective Diameter</i>	44 mm	44 mm
<i>Tube Diameter</i>	30 mm	30 mm
<i>Reticle</i>	Etched Glass UMOA	Etched Glass UMOA
<i>Illumination</i>	IE® 36-Color	IE® 36-Color
<i>Angular FOV</i>	6.1°-1.9°	5°-1.5°
<i>Linear FOV @ 100 yds</i>	32-10 ft	26.2-8 ft
<i>Click Value</i>	1/4 MOA	1/4 MOA
<i>Eye Relief</i>	4-3.54 in (102-90 mm)	3.7-3.23 in (94-82 mm)
<i>Exit Pupil</i>	14.7-4.5 mm	11-3 mm
<i>Diopter</i>	-2D to +2D	-2D to +2D
<i>Parallax</i>	10 yds - ∞	10 yds - ∞
<i>Length</i>	10.1 in (257 mm)	10.7 in (272 mm)
<i>Weight</i>	20.7 oz (587 g)	21.4 oz (607 g)
<i>Battery Type</i>	CR2032 3V	CR2032 3V
<i>Included Scope Rings</i>	RG2W3154 Medium Pro. Picatinny	RG2W3154 Medium Pro. Picatinny

## OPTIONAL ACCESSORIES

### PARALLAX INDEX WHEEL

» Compatible with UTG® OP3 Series  
 Side AO Scopes, OP3-GM3124UM0A,  
 OP3-GM4164UM0A Only

**80 mm / OP3-SW080**







## SCP3 SCOPES


The UTG® SCP3 line builds upon the bidirectional recoil resistant TRUE STRENGTH® platform with locking single hex screw turrets and an integrated sunshade. Complete with a 1-8X28 LPVO, 3-12X44 and 4-16X44 in both full and compact sizes across your tactical and hunting applications.



# UTG® SCP3 SCOPES



**1-8X28 / SFP / 30 MM**  
**ETCHED GLASS BG4 / IE® 36-COLOR**  
/ SCP3-18IEBG4

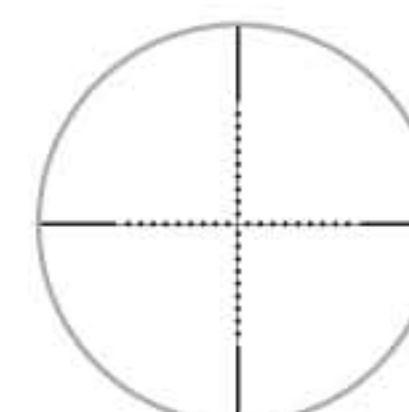

**3-12X44 / SFP / 30 MM**  
**WIRE MIL-DOT / IE® 36-COLOR**  
/ SCP3-UM312AOIEW

**4-16X44 / SFP / 30 MM**  
**WIRE MIL-DOT / IE® 36-COLOR**  
/ SCP3-U416AOIEW  
/ SCP3-UM416AOIEW

US PAT. 8437079, EU PAT. EP2520894  
(Refer to pg. 056-061 for Detailed Reticle Info.)

	SCP3-18IEBG4	SCP3-UM312AOIEW	SCP3-UM416AOIEW	SCP3-U416AOIEW
<i>Focal Plane</i>	SFP	SFP	SFP	SFP
<i>Magnification</i>	1-8X	3-12X	4-16X	4-16X
<i>Objective Diameter</i>	28 mm	44 mm	44 mm	44 mm
<i>Tube Diameter</i>	30 mm	30 mm	30 mm	30 mm
<i>Reticle</i>	Etched Glass BG4	Wire Mil-Dot	Wire Mil-Dot	Wire Mil-Dot
<i>Illumination</i>	IE® 36-Color	IE® 36-Color	IE® 36-Color	IE® 36-Color
<i>Angular FOV</i>	18.8°-2.5°	6.1°-1.9°	5°-1.5°	4.7°-1.3°
<i>Linear FOV @ 100 yds</i>	99.5-13.0 ft	32.0-10.0 ft	26.2-7.85 ft	24.4-6.8 ft
<i>Click Value</i>	1/2 in	1/4 in	1/4 in	1/4 in
<i>Eye Relief</i>	5-3.35 in (127-85 mm)	3.4-3.0 in (86-76 mm)	3.4-3.0 in (86-76 mm)	3.2-3.0 in (81-76 mm)
<i>Exit Pupil</i>	26.5-3.4 mm	13.0-3.9 mm	11.0-2.7 mm	10.2-2.8 mm
<i>Diopter</i>	-2D to +2D	-2D to +2D	-2D to +2D	-2D to +2D
<i>Parallax</i>	Preset @ 100 yds	10 yds-∞	10 yds-∞	10 yds-∞
<i>Length</i>	10.2 in (259 mm)	11.1 in (282 mm)	11.2 in (284 mm)	15.4 in (391 mm)
<i>Weight</i>	18.0 oz (510 g)	23.2 oz (658 g)	21.8 oz (618 g)	23.4 oz (663 g)
<i>Battery Type</i>	CR2032 3V	CR2032 3V	CR2032 3V	CR2032 3V
<i>Included Scope Rings</i>	AIR32234 High Pro. Picatinny	RG2W3154 Med. Pro. Picatinny	RG2W3154 Med. Pro. Picatinny	RG2W3154 Med. Pro. Picatinny

## OPTIONAL ACCESSORIES

### PARALLAX INDEX WHEEL

- » Compatible with UTG® SCP3 Series Side AO Scopes

**60 mm / SCP-SW060B**  
**80 mm / SCP-SW080B**



### RUBBER SCOPE EYESHAD

- » Designed to Fit Scopes with Approximately 3" Eye Relief
- » Adaptor Kit Includes 3 Inserts of Varying Thicknesses to Fit Scopes with Eyepiece Diameter of 36mm, 40mm, 41.5mm or 43mm

/ SCP-ES403





# BUG BUSTER®



## BUG BUSTER® SCOPES

The iconic UTG® BUG BUSTER® line has become a household name for value-driven hunters and plinkers alike. Lightweight and compact, Bug Busters are just over 8 inches in length never add more than 1 pound to your rifle build, while still going the distance from 3X to 12X. Available with picatinny or dovetail rings included.



# UTG® BUG BUSTER® SCOPES



**3-9X32 / SFP / 1" / FRONT AO  
WIRE MIL-DOT / RG**

/ SCP-M392A0LWQ


US PAT. 8397421

**3-12X32 / SFP / 1" / SIDE AO  
WIRE MIL-DOT**

/ SCP-M312A0WQ

/ SCP-M312A0D

	SCP-M392A0LWQ	SCP-M312A0WQ	SCP-M312A0D
<i>Focal Plane</i>	SFP	SFP	SFP
<i>Magnification</i>	3-9X	3-12X	3-12X
<i>Objective Diameter</i>	32 mm	32 mm	32 mm
<i>Tube Diameter</i>	1 in	1 in	1 in
<i>Reticle</i>	Wire Mil-Dot	Wire Mil-Dot	Wire Mil-Dot
<i>Illumination</i>	RG	N/A	N/A
<i>Angular FOV</i>	7.2°-2.7°	5.9°-1.9°	5.9°-1.9°
<i>Linear FOV @ 100 yds</i>	37.7-14.0 ft	31.0-10.0 ft	31.0-10.0 ft
<i>Click Value</i>	1/4 MOA	1/3 MOA	1/3 MOA
<i>Eye Relief</i>	4.2-3.2 in (107-81 mm)	4.3-3.3 in (109-84 mm)	4.3-3.3 in (109-84 mm)
<i>Exit Pupil</i>	10.6 mm-3.6 mm	10.6-2.7 mm	10.6-2.7 mm
<i>Diopter</i>	-2D to +2D	-2D to +2D	-2D to +2D
<i>Parallax</i>	3 yds-∞	3 yds-∞	3 yds-∞
<i>Length</i>	8.2 in (208 mm)	8.1 in (206 mm)	8.1 in (206 mm)
<i>Weight</i>	14.0 oz (397 g)	12.7 oz (360 g)	12.7 oz (360 g)
<i>Battery Type</i>	CR1620 3V	N/A	N/A
<i>Included Scope Rings</i>	RQ2W1154 Medium Pro. Picatinny	RQ2W1154 Medium Pro. Picatinny	RT2D1154 Medium Pro. Dovetail

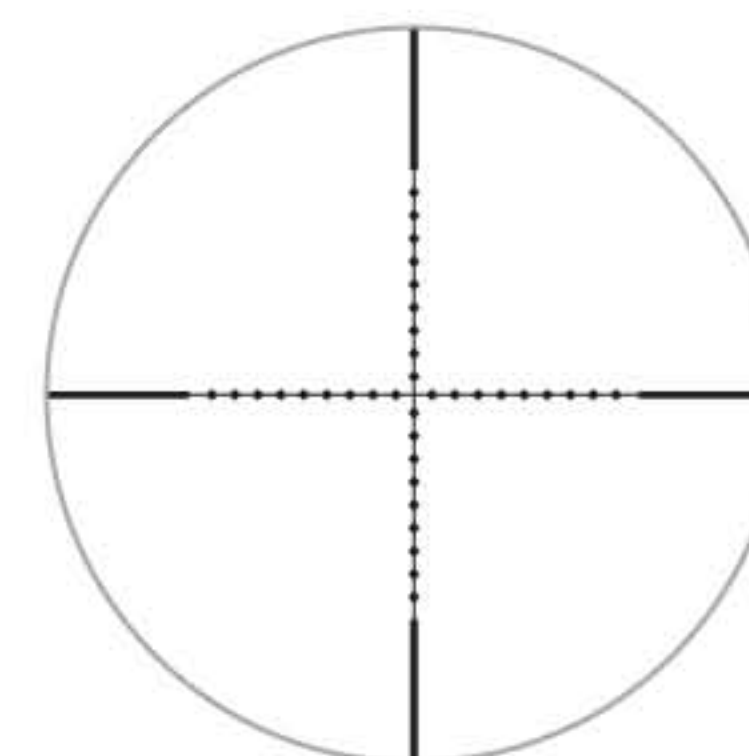

## MIL-DOT WIRE RETICLE / SFP

(Refer to pg. 056-061 for Detailed Reticle Info.)

The crosshair has multiple dots spread equally along the X and Y axis. The distance between two adjacent marks subtends to 1 milli-radian. The traditional wire reticle is robust and holds up against strong recoil and offers a clear aiming reference without compromise.



# TRUE HUNTER®




## TRUE HUNTER® SCOPES

The UTG® TRUE HUNTER® line is your collection of traditional hunting optics. The SCP-U432FD is a capped turret fixed 4X power with included dovetail rings ideal for more dense terrain. From there, explore variable selections from 3X out to 24X magnification in 1 inch tubes with locking adjustable turrets.



# UTG® TRUE HUNTER® SCOPES

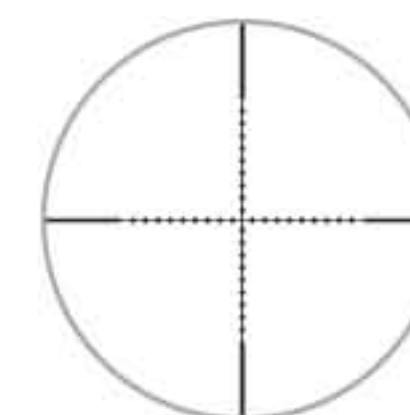

**4X32 / SFP / 1"**  
**WIRE MIL-DOT**

/ SCP-U432FD

**3-9X40 / SFP / 1"**  
**WIRE MIL-DOT / IE® 36-COLOR**

/ SCP-U394A0IEW

**4-16X40 / SFP / 1"**  
**WIRE MIL-DOT / IE® 36-COLOR**

/ SCP-U4164A0IEW

US PAT. 8437079, EU PAT. EP2520894

**6-24X50 / SFP / 1"**  
**WIRE MIL-DOT / IE® 36-COLOR**

/ SCP-U6245A0IEW

US PAT. 8437079, EU PAT. EP2520894

(Refer to pg. 056-061 for Detailed Reticle Info.)

	SCP-U432FD	SCP-U394A0IEW	SCP-U4164A0IEW	SCP-U6245A0IEW
<i>Focal Plane</i>	SFP	SFP	SFP	SFP
<i>Magnification</i>	4X	3-9X	4-16X	6-24X
<i>Objective Diameter</i>	32 mm	40 mm	40 mm	50 mm
<i>Tube Diameter</i>	1 in	1 in	1 in	1 in
<i>Reticle</i>	Wire Mil-Dot	Wire Mil-Dot	Wire Mil-Dot	Wire Mil-Dot
<i>Illumination</i>	N/A	IE® 36-Color	IE® 36-Color	IE® 36-Color
<i>Angular FOV</i>	6.1°	6.8°-2.3°	4.4°-1.1°	2.7°-0.8°
<i>Linear FOV @ 100 yds</i>	32 ft	35.6-12 ft	23.0-6.0 ft	14.4-4.1 ft
<i>Click Value</i>	1/4 in	1/4 in	1/4 in	1/4 in
<i>Eye Relief</i>	3.4 in (86 mm)	3.9-3.2 in (99-81 mm)	3.2-3.0 in (81-76 mm)	3.2-3.0 in (81-76 mm)
<i>Exit Pupil</i>	8.0 mm	13-4.5 mm	10.0-2.5 mm	8.3-2.2 mm
<i>Diopter</i>	-2D to +2D	-2D to +2D	-2D to +2D	-2D to +2D
<i>Parallax</i>	Preset @ 35 yds	5 yds-∞	5 yds-∞	10 yds-∞
<i>Length</i>	11.8 in (300 mm)	12.6 in (320 mm)	14.5 in (368 mm)	15.5 in (394 mm)
<i>Weight</i>	14.4 oz (408 g)	21.1 oz (598 g)	22.3 oz (632 g)	26.5 oz (751 g)
<i>Battery Type</i>	N/A	CR2032 3V	CR2032 3V	CR2032 3V
<i>Included Scope Rings</i>	RGPM-25M2 Medium Pro. Dovetail	RQ2W1204 High Pro. Picatinny	RGWM-25H4 High Pro. Picatinny	RQ2W1204 High Pro. Picatinny

## OPTIONAL ACCESSORIES

### RUBBER SCOPE EYE SHADE

- » Designed to Fit Scopes with Approximately 3" Eye Relief
- » Prevents Glare and Improves Focus on Target by Eliminating Distractions from Peripheral Movement
- » Adaptor Kit Includes 3 Inserts of Varying Thicknesses to Fit Scopes with Eyepiece Diameter of 36mm, 40mm, 41.5mm or 43mm

/ SCP-ES403







## CROSSBOW SCOPES

The UTG® Crossbow line is compact and lightweight, ideal for crossbow hunters. The SCP model offers a fixed 4X32 with single hex locking turrets and wire BDC reticle. The OP3 1.5-6X36 model features updated low profile locking turrets and FPS compensation for your BDC from 250-475 directly on your magnification ring.




# UTG® CROSSBOW SCOPES




	OP3-G1563CRWQ	SCP-M4CR5WQ
Focal Plane	SFP	SFP
Magnification	FPS Compensation 250-75 ( 1.5-6X )	4X
Objective Diameter	36 mm	32 mm
Tube Diameter	30 mm	1"
Reticle	Etched Glass 130 Hunter	Wire PRO 5-Step
Illumination	RG	RG
Angular FOV	10°-2.7°	5.2°
Linear FOV @ 100 yds	52.5-13.98 ft	27.2 ft
Click Value	1/2 MOA	1/4 in
Eye Relief	5.8-4.25 in (147-108 mm)	3.8 in (97 mm)
Exit Pupil	24 mm - 6.2 mm	8.0 mm
Diopter	-2D to +2D	-2D to +2D
Parallax	10 yds-∞	Fixed @ 50 yds
Length	8.2 in (208 mm)	8.2 in (208 mm)
Weight	16.0 oz (454 g)	12.3 oz (349 g)
Battery Type	CR1632 3V	CR1620 3V
Included Scope Rings	RG2W3154 Medium Pro. Picatinny	RQ2W1104 Low Pro. Picatinny

## TRUE HUNTER® CROSSBOW SCOPE

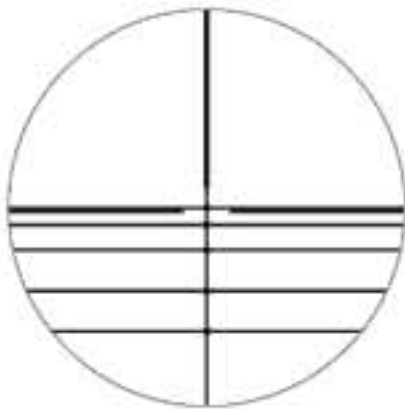


**4X32 / SFP / 1"**  
**WIRE PRO 5-STEP / RG**  
 / SCP-M4CR5WQ  
 US PAT. 8397421  
*(Refer to pg. 056-061 for Detailed Reticle Info.)*

## OP3 CROSSBOW SCOPE

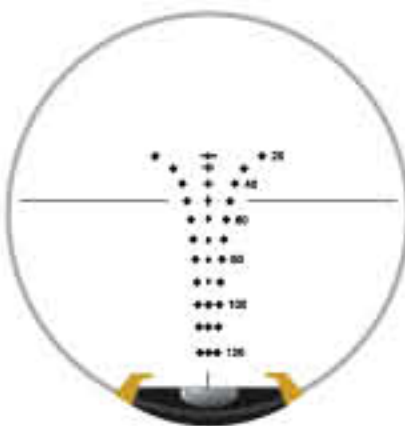

**1.5-6X36 / SFP / 30 MM**  
**ETCHED GLASS 130 HUNTER BDC / RG**  
 / OP3-G1563CRWQ

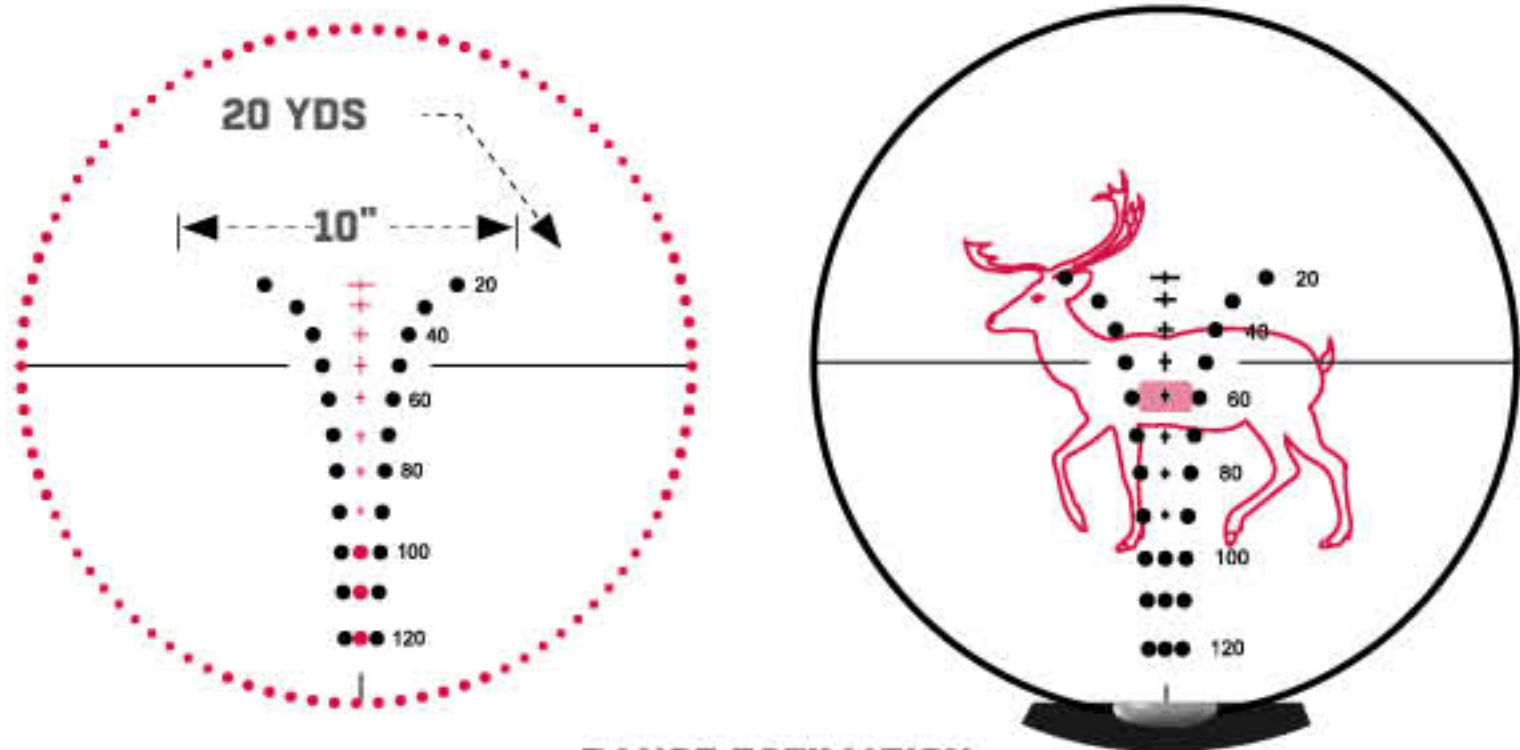

RANGE ESTIMATION

## 130 HUNTER BDC GLASS RETICLE / SFP

*(Refer to pg. 056-061 for Detailed Reticle Info.)*

The 130 Hunter BDC offered on our FPS compensating OP3 Crossbow Scope has an integrated internal bubble level at the 6 o'clock position. Use the leveler to aid with cant while maintaining full FOV. This reticle also features simple range estimation from 20 to 120 yards and BDC holds.





## LONG EYE RELIEF SCOPES

UTG® Long Eye Relief optics provide the solution for reaching out with your handguns or setting up your next scout rifle. The SCP-27PRGW is a 2-7X32 1 inch tube for your revolver with eye relief over a foot, and the SCP3 Scout Rifle scope is a 2-7X44 with a 30 mm tube and 9.5-11 inch eye relief with plenty of room to clear your top-ejecting lever gun.



# UTG® LONG EYE RELIEF SCOPES




## SCP3 SCOUT RIFLE SCOPE

2-7X44 / SFP / 30MM  
ETCHED GLASS MIL-DOT  
/ IE® 36-COLOR

/ SCP3-274LA0IEW

US PAT. 8437079  
EU PAT. EP2520894

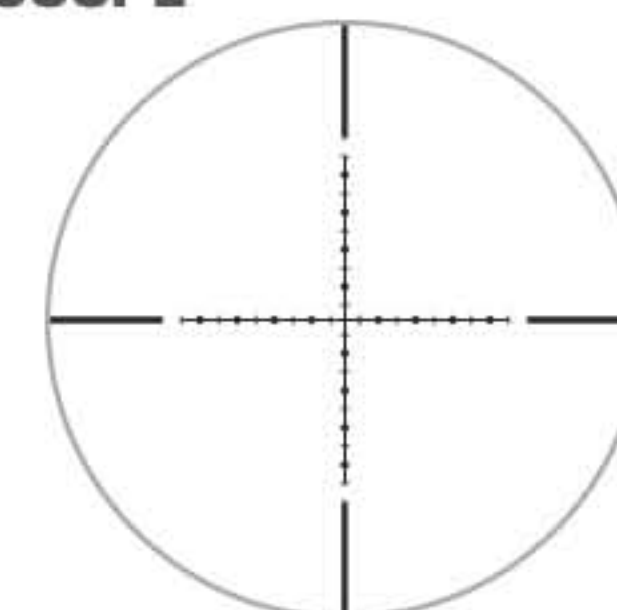

## MIL-DOT GLASS RETICLE / SFP

(Refer to pg. 056-061 for Detailed Reticle Info.)

The crosshair has dots and dashes spread equally along the X and Y axis. The distance between two adjacent marks subtends to 1 milli-radian. The etched-glass reticle offers our discerning users the sharpest Mil-dot reticle for precise range estimation.


	SCP3-274LA0IEW	SCP-27PRGW
Focal Plane	SFP	SFP
Magnification	2-7X	2-7X
Objective Diameter	44 mm	32 mm
Tube Diameter	30 mm	1 in
Reticle	Etched Mil-Dot	Wire PDC
Illumination	IE® 36-Color	RG
Angular FOV	6.1°-1.9°	2.5°-1.3°
Linear FOV @ 100 yds	32.0-10.0'	12.9-7.0'
Click Value	1/4 in	1/4 in
Eye Relief	11.0-9.5 in (279-241 mm)	25.0-13.8 in (635-351 mm)
Exit Pupil	22.0-6.3 mm	16.0-5.0 mm
Diopter	-2D to +2D	-2D to +2D
Parallax	10 yds-Infinity	Fixed @ 35 yds
Length	11.5 in (292 mm)	9.4 in (239 mm)
Weight	25.4 oz (720 g)	14.0 oz (397 g)
Battery Type	CR2032 3V	CR1620 3V
Included Scope Rings	RG2W3154 Medium Pro. Picatinny 30 mm	RGWM-25M4 Medium Pro. Picatinny 1 in

## TRUE HUNTER® HANDGUN SCOPE

2-7X32 / SFP / 1"

PDC / RG

/ SCP-27PRGW

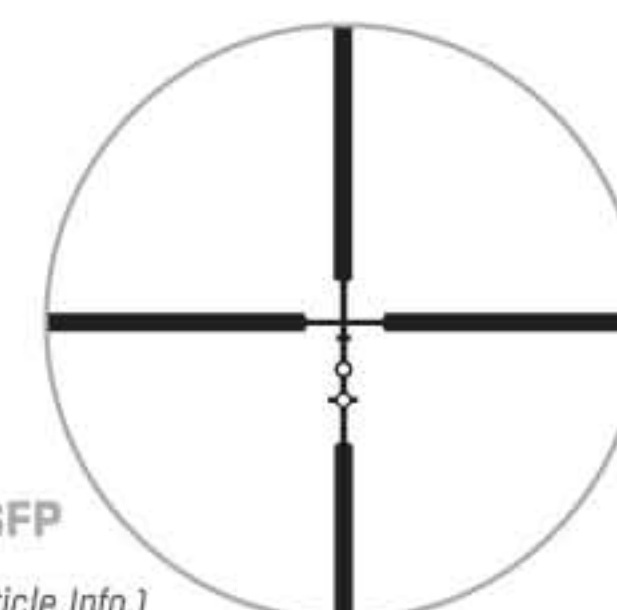


## PDC WIRE RETICLE / SFP

(Refer to pg. 056-061 for Detailed Reticle Info.)

The Projectile Drop Compensation (PDC) reticle uses different bars and circles arranged at designated heights to aid in range estimation and serve as aiming points set at predetermined distances. This enables easy and rapid target engagement at multiple ranges.



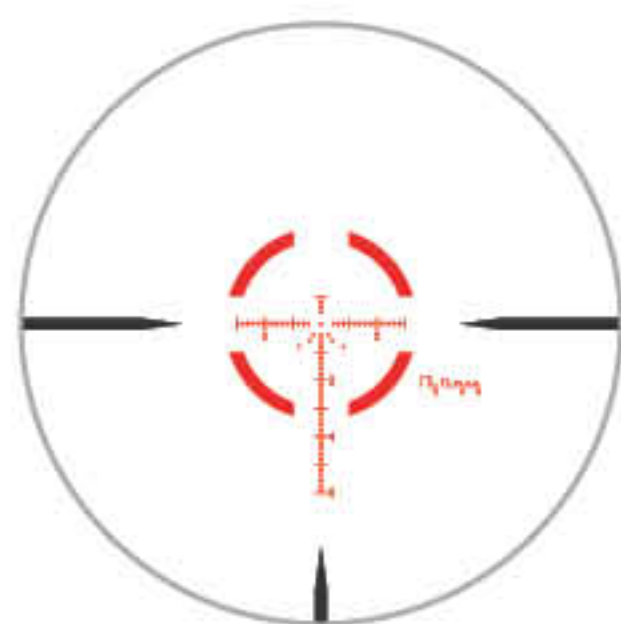


## A1 MOA GLASS RETICLE / FFP

### THE RIFLEMAN'S CQB IN MINUTES

Cover your bases no matter your target with this multi-disciplinary reticle.

At 1X, a quick-to-acquire T-Dot enclosed within a 68 MOA segmented circle makes close up work quick and to the point, functioning similarly to a dot sight. At higher magnifications the reticle opens up to provide users with a crisp 1 MOA center dot, range estimation out to 600 yards (549 m), and hash marks up to 60 MOA vertically for holdover and 30 MOA horizontally left and right in 2 MOA increments.

- IX801FA1 / 1-8X28mm / RG (pg. 023)
- AS601FA1 / 1-6X24mm / RG (pg. 037) **NEW**

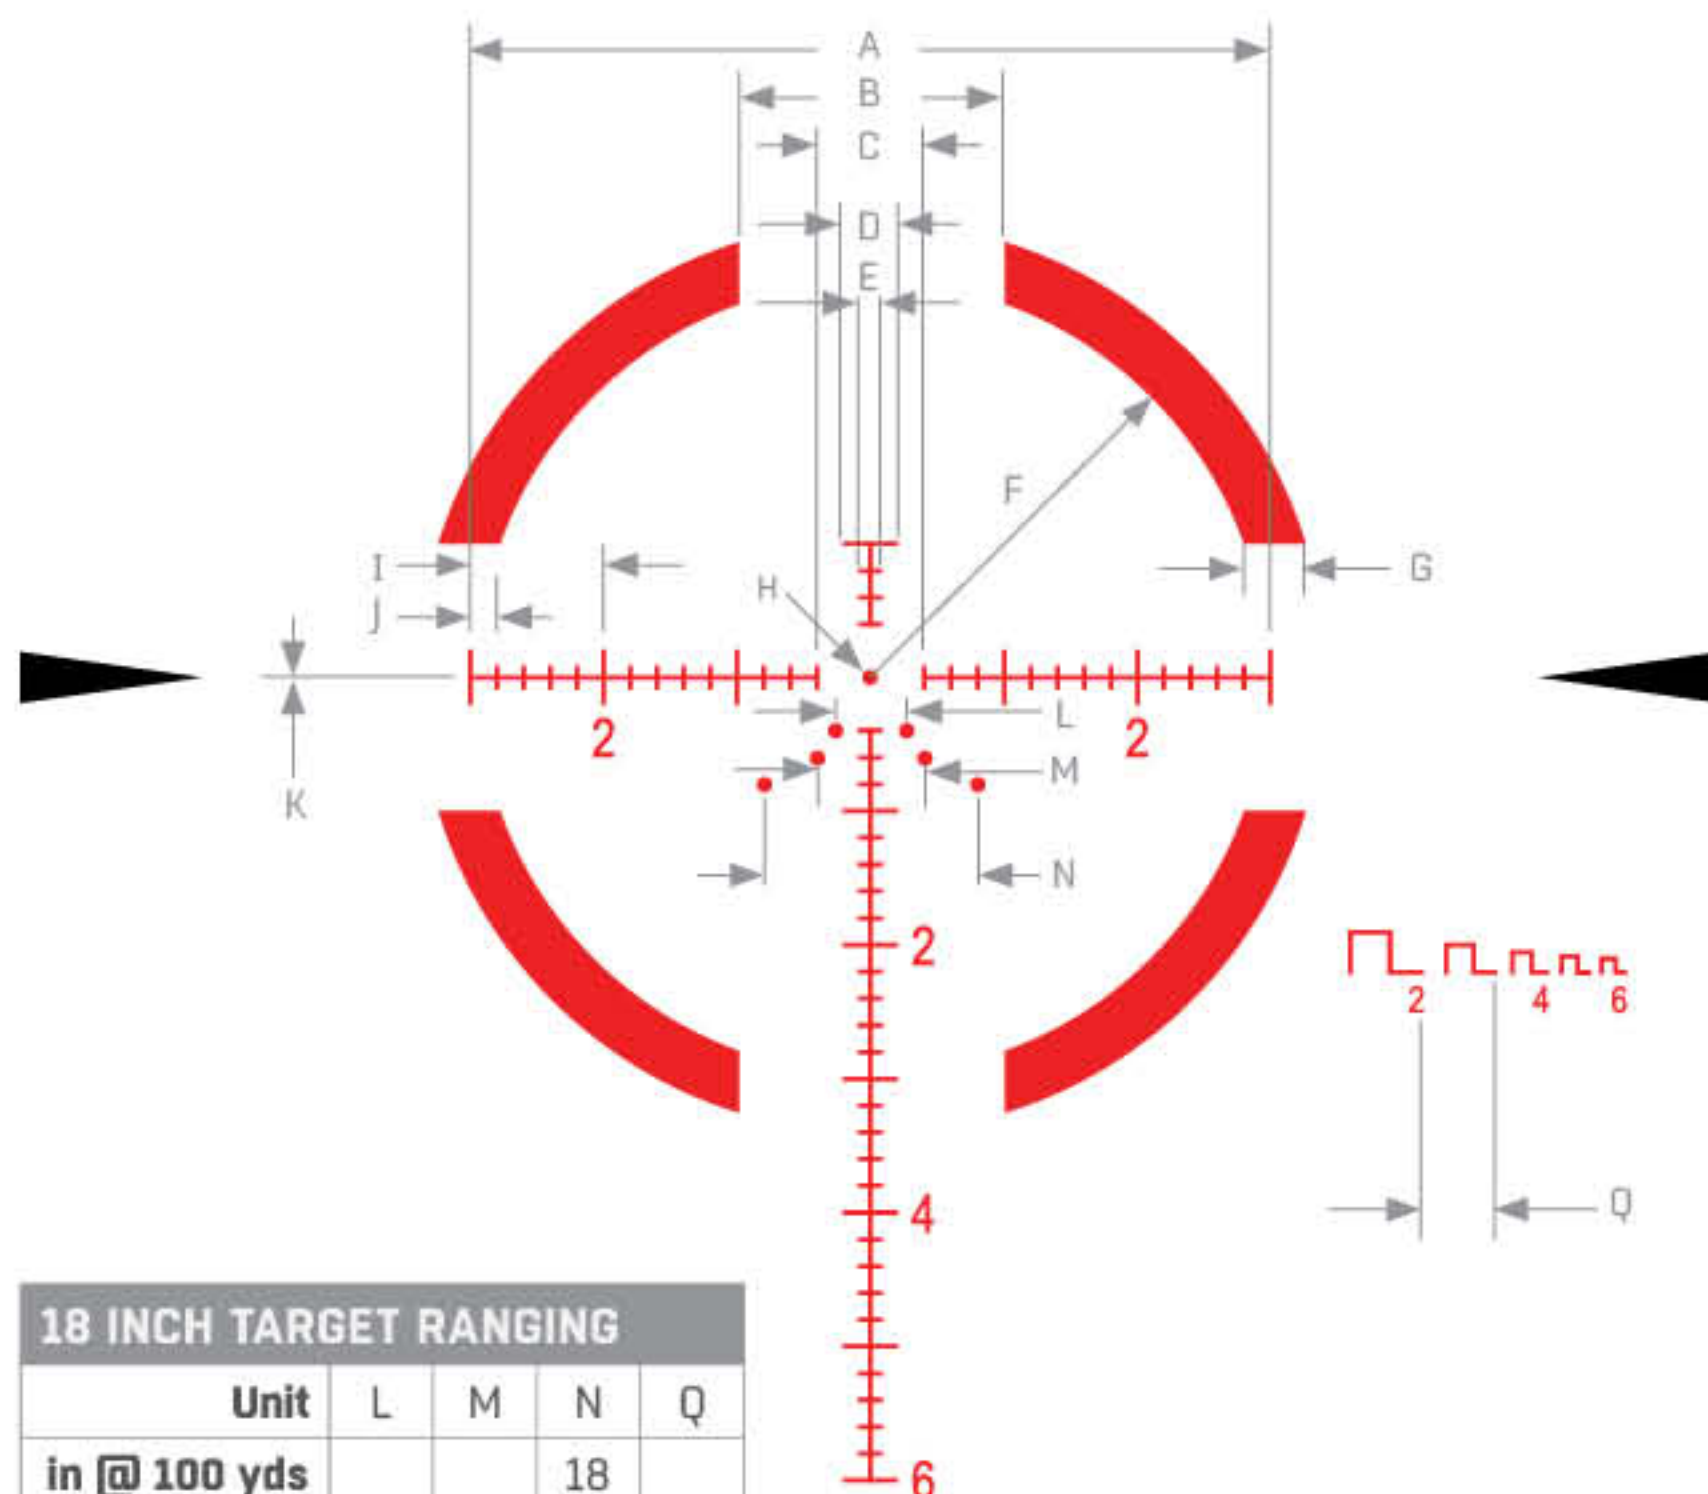


### 18 INCH TARGET RANGING

Unit	L	M	N	Q
in @ 100 yds			18	
in @ 200 yds		18		
in @ 300 yds	18			18

### RETICLE BREAKDOWN

Unit	A	B	C	D	E	F	G	H	I	J	K
MOA	60	20	8	4	2	34	4	1	10	2	0.25

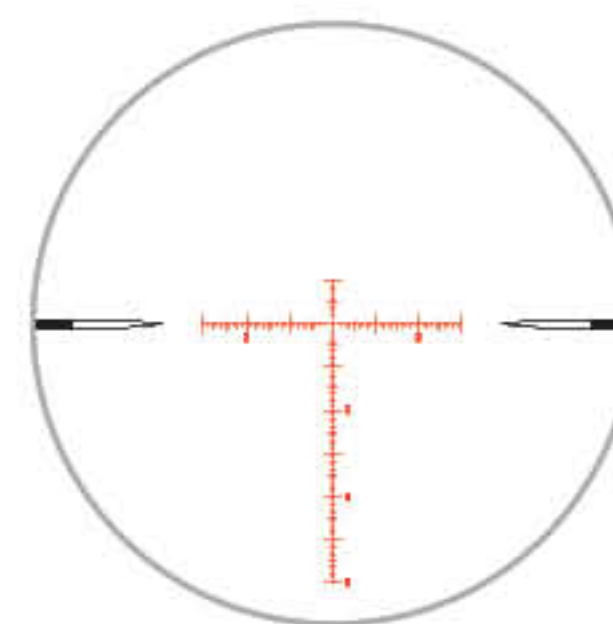

## A2 MOA GLASS RETICLE / FFP


### SIMPLE YET EFFECTIVE CROSSHAIRS

Honor the simplicity of the German Duplex while adding vertical and horizontal holds to always track your target.

Clutter-free at both low and high magnifications to supplement overall FOV, the German Duplex inspired A2 MOA reticle features sub-tensions that transition from being bolded to see-through while tapering down to a fine point towards the reticle's center. The center crosshair, at low magnification, provides a quick-to-acquire T-Dot and fully illuminates.

The T-Dot at higher magnification opens up and provides an unobtrusive 0.5 MOA floating center dot which focuses the eyes to the center of the reticle and frees up space between it and the remainder of the reticle to provide a better view of critical target details. The reticle spans 10 MOA up and 60 MOA down and 30 MOA left and right in 1 MOA increments.


- IX603FA2 / 3-18X44mm / RG (pg.023)
- AS303FA2 / 3-9X36mm / RG (pg.037) **NEW**
- AS312FA2 / 3-12X44mm / RG (pg.037) **NEW**

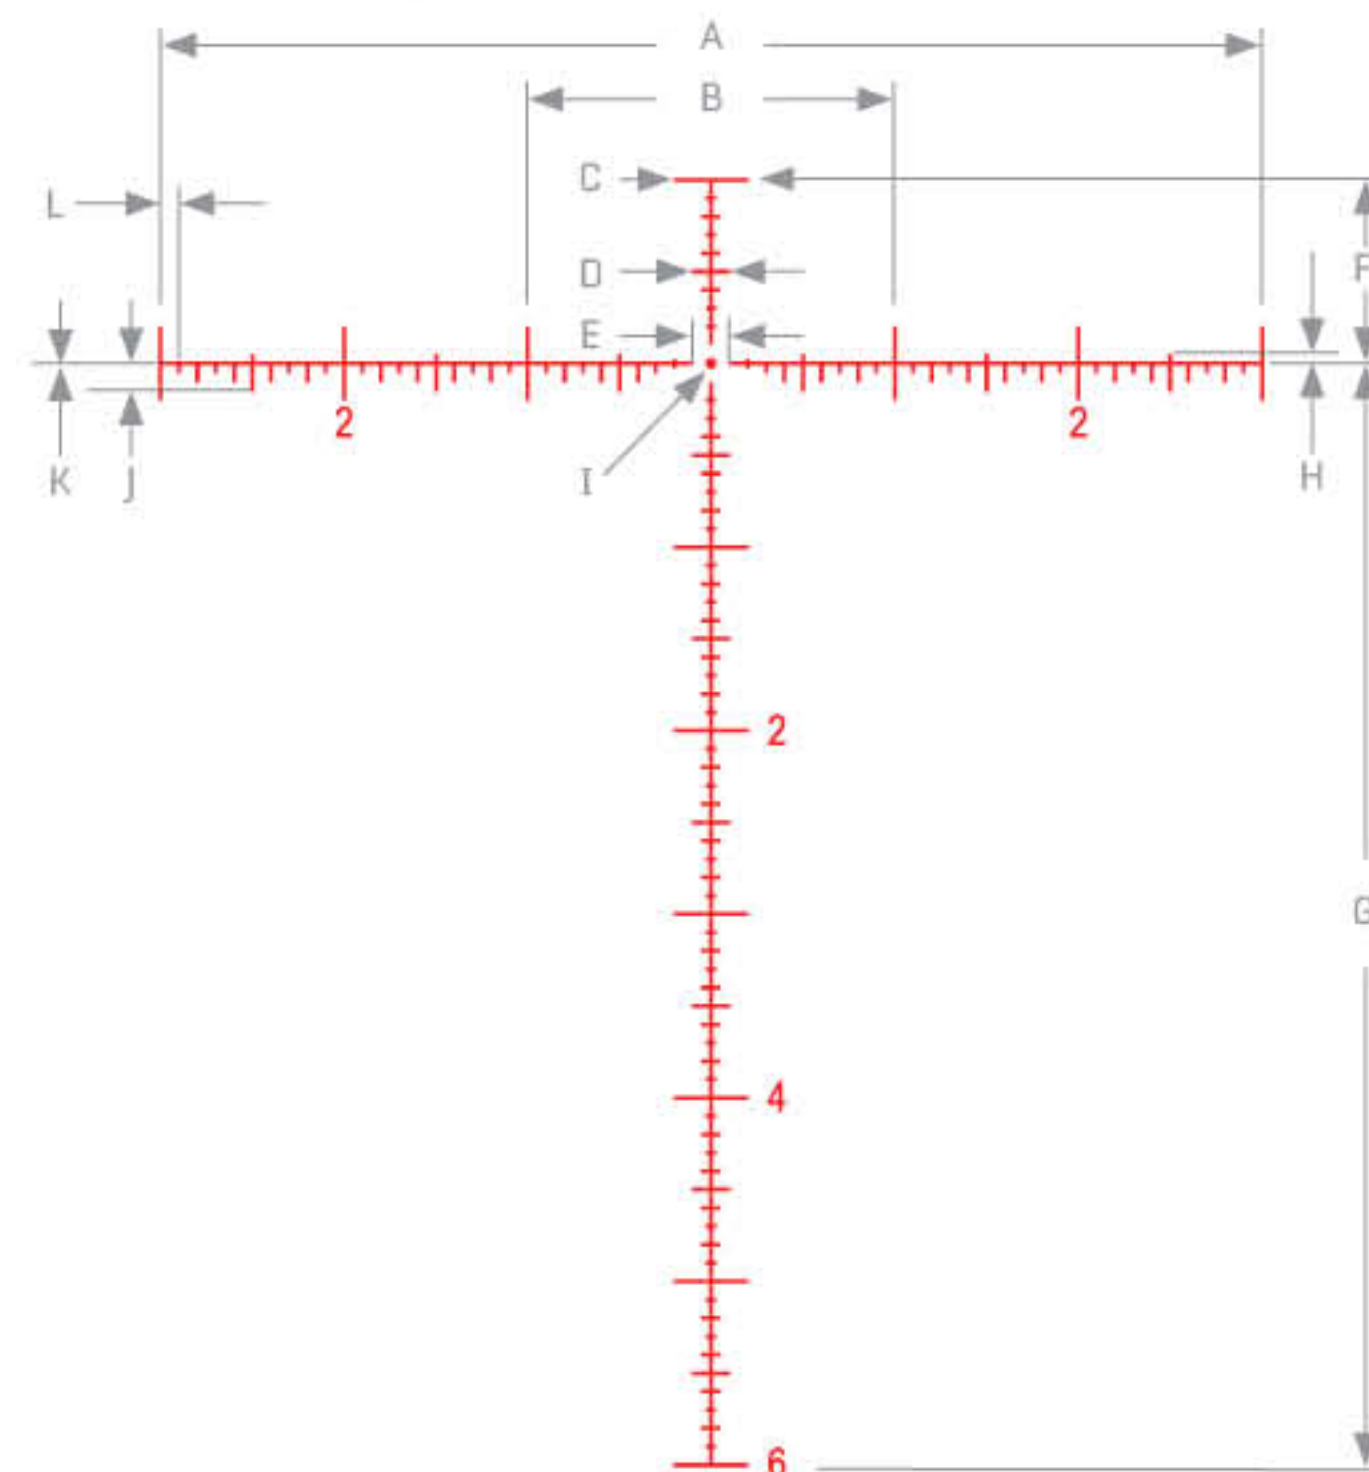

### RETICLE BREAKDOWN

Unit	A	B	C	D	E	F	G	H	I	J	K	L
MOA	60	20	4	2	2	10	60	0.5	0.5	1.5	0.125	1



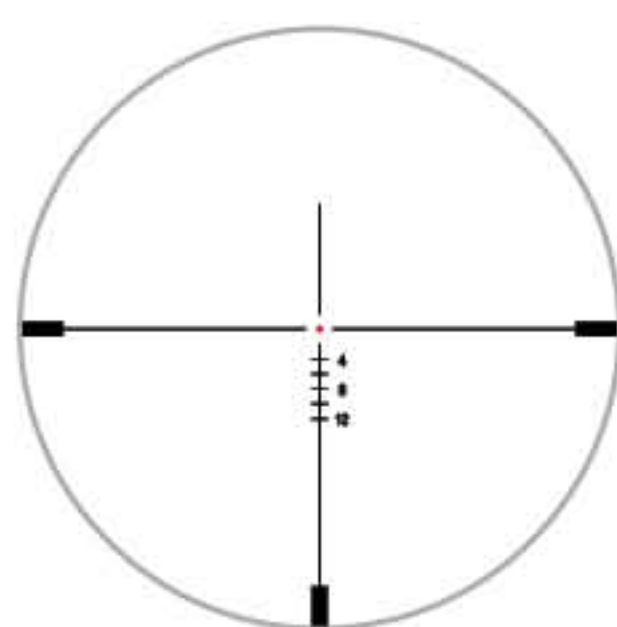


## A3 MOA GLASS RETICLE / SFP

### MORE THAN JUST THE WIRE

Keep it simple with the German 4-inspired A3 MOA reticle.


Derived from the traditional German 4 reticle and catered towards the IPSC rifle shooter is our A3 MOA Reticle. This reticle showcases three 2 MOA thick stadia coming in from the outer edges and traversing towards the center in a similar fashion to that of a duplex and stepping down in thickness to ¼ MOA along the way. The focal point boasts a 1 MOA floating dot which illuminates, ensuring the utmost precision for your center hold. Moreover, the reticle offers MOA holdover marks, extending up to 12 MOA for those moments where you require more reach.

- » IX801SA3 / 1-8X28mm / RG (pg.023) **NEW**
- » IXF45SA3 / 4.5X28mm / RG (pg.031) **NEW**

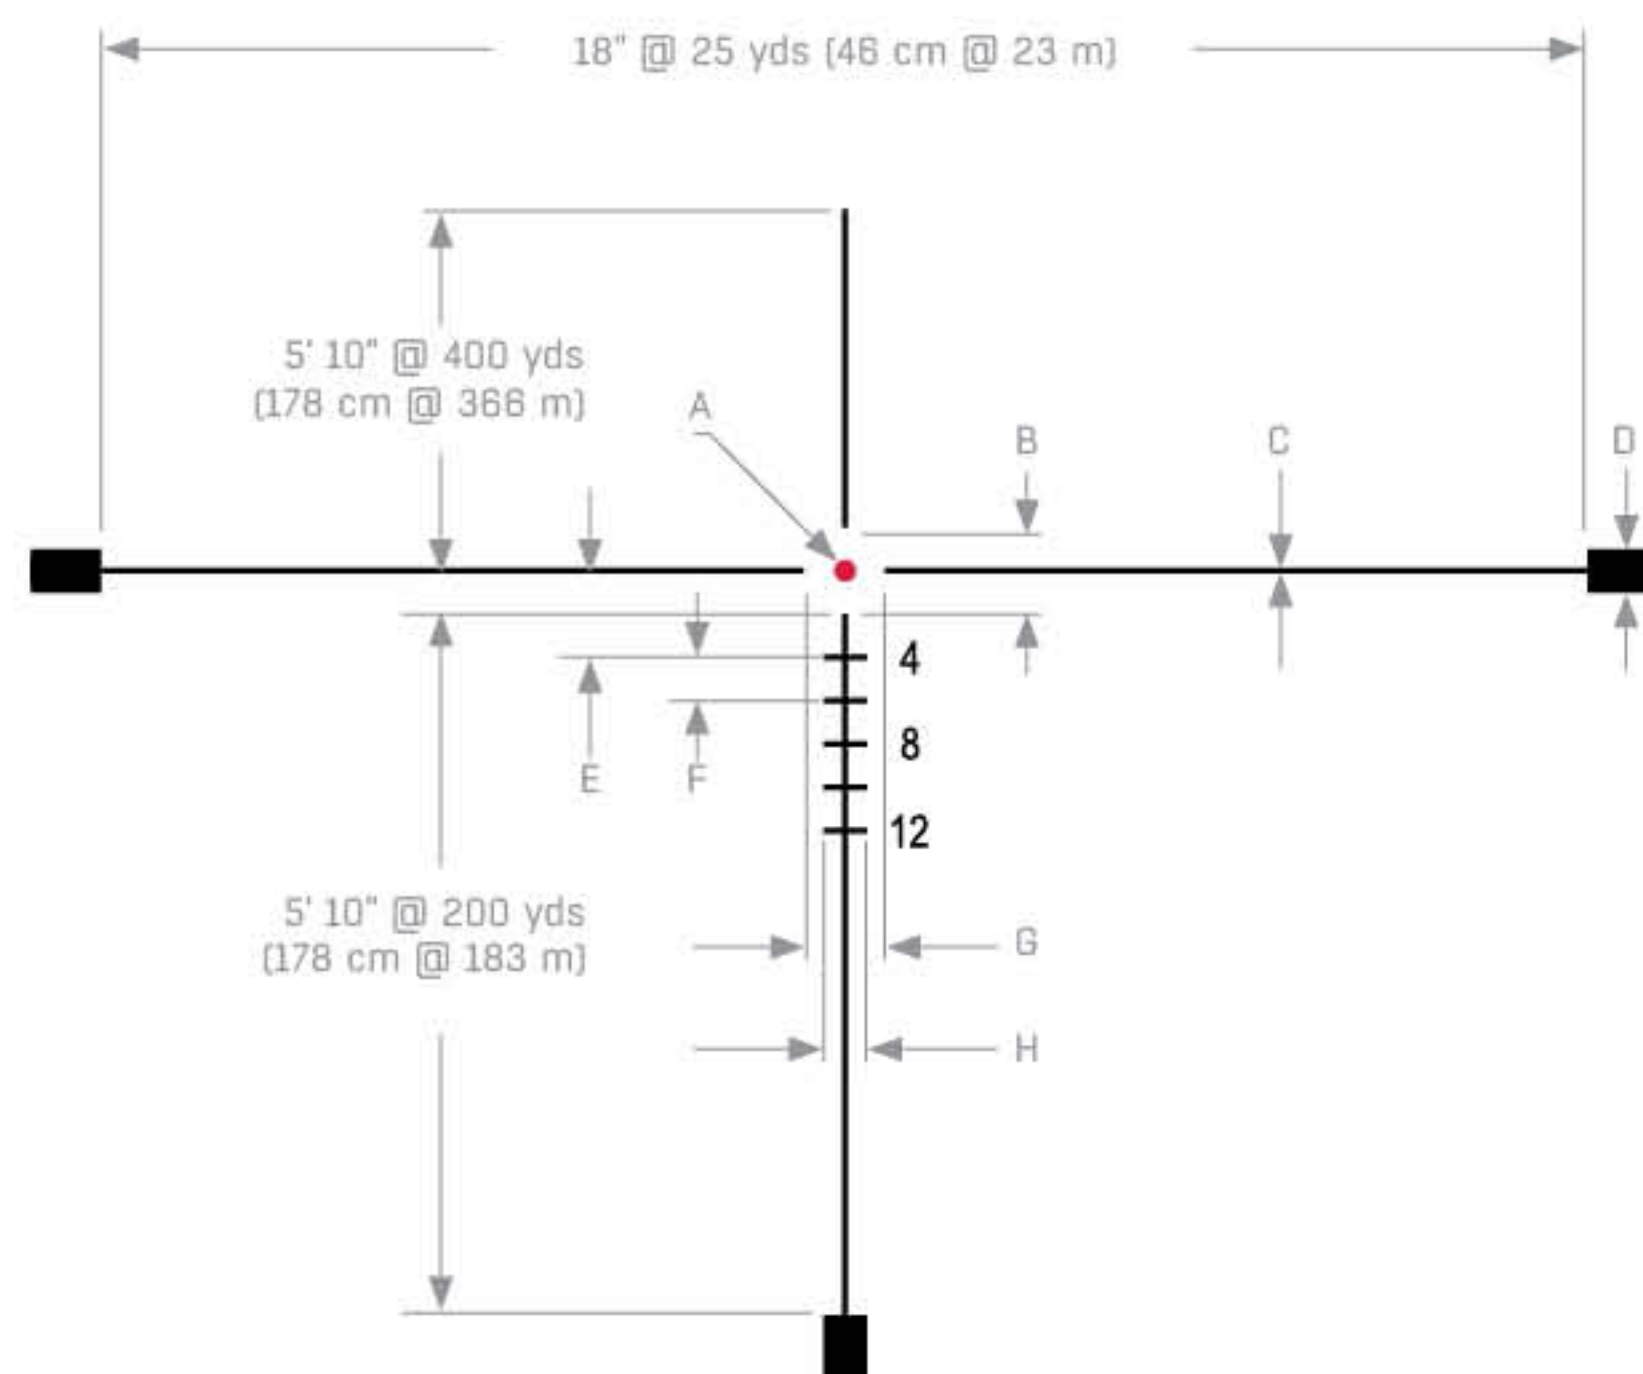

### RETICLE BREAKDOWN

Unit	A	B	C	D	E	F	G	H
MOA	1	4	0.25	2	4	2	4	2

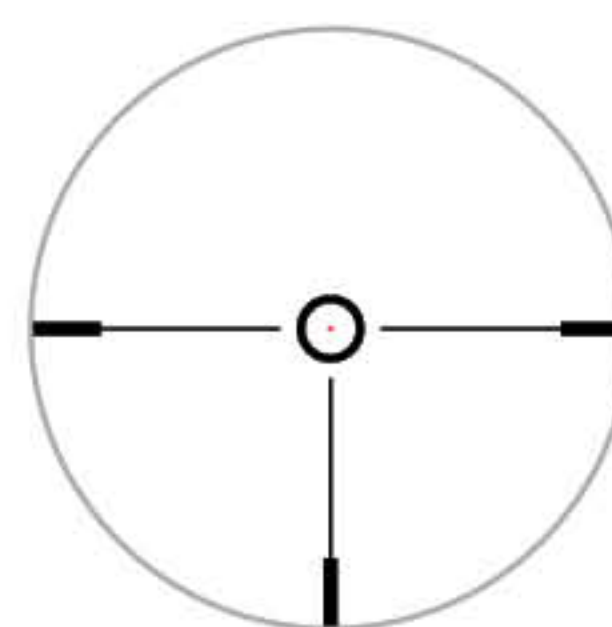


## A4 MOA GLASS RETICLE / SFP

### THE MARKSMAN'S APERTURE

Encircle your target with this minimal circle-dot reticle.


Keep center and encircle your target with a floating 0.75 MOA dot and a circle 2 MOA thick with an 8 MOA inner diameter.

- » IXF45SA4 / 4.5X28mm / RG (pg.031) **NEW**

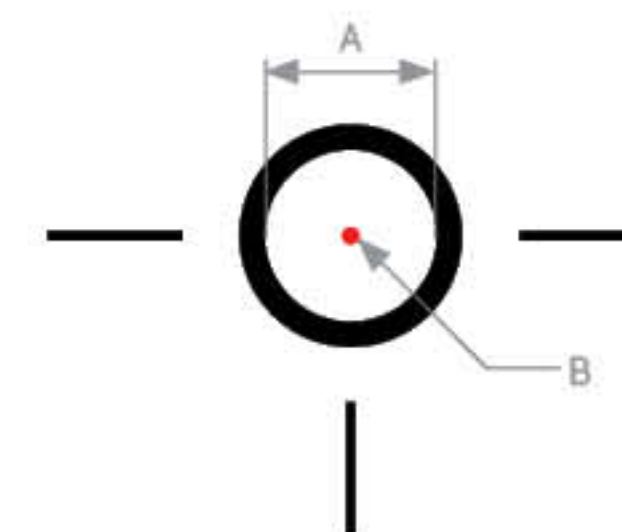

### RETICLE BREAKDOWN


Unit	A	B
MOA	8	0.75

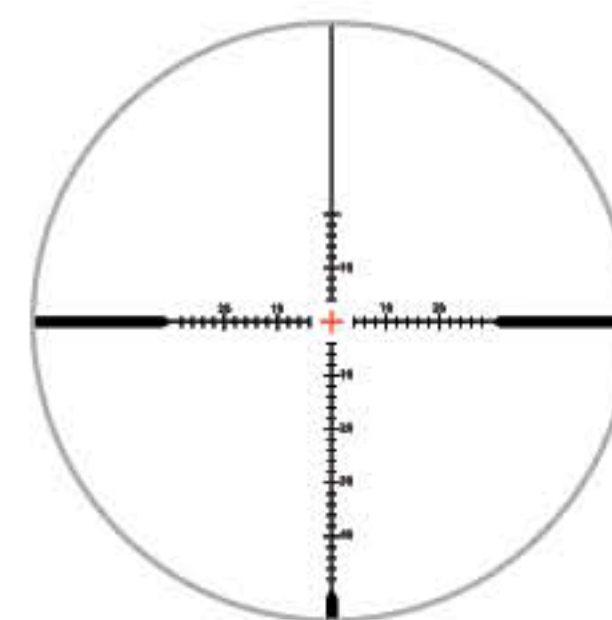

## UMOA GLASS RETICLE / SFP

The UMOA reticle features hash marks at minute of angle increments for precise range estimation and bullet drop and wind drift compensation. This reticle is the best choice for long-range precision shooters who want clear adjustments and to rapidly calculate holds. The reticle's center crosshair can be illuminated to assist aiming under different light conditions.

- » OP3-GM3124UMOA / 3-12X44mm / IE 36-Color (pg.045)
- » OP3-GM4164UMOA / 4-16X44mm / IE 36-Color (pg.045)

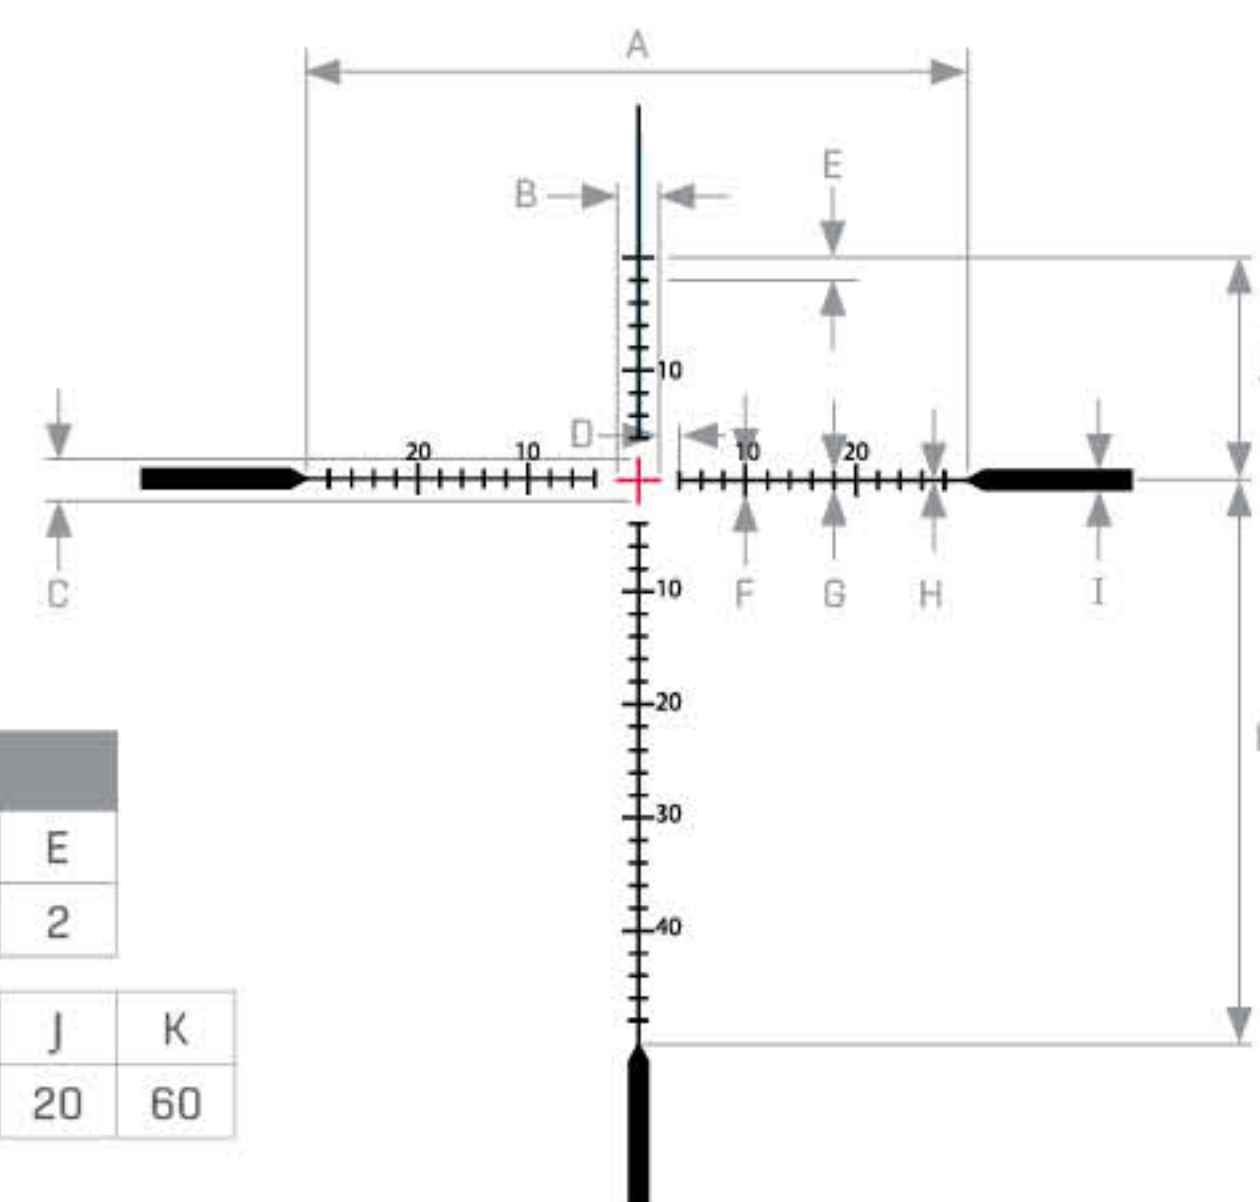


### RETICLE BREAKDOWN

Unit	A	B	C	D	E
MOA	60	4	4	2	2

Unit	F	G	H	I	J	K
MOA	2	1	0.2	1.3	20	60





# BDC RETICLES

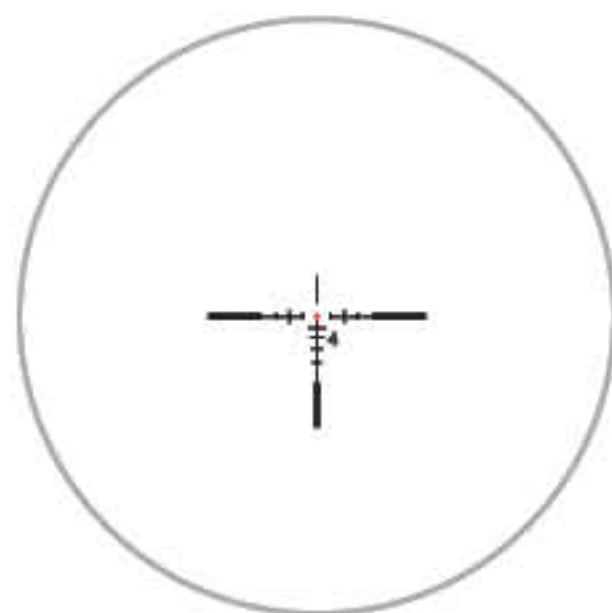

## BG4 GLASS RETICLE / SFP


The BG4 reticle is designed to be fast and intuitive to use and features ballistic drop compensation and range finder markings out to 600 yards. The ballistic data is based on common 5.56/.223 loadings in modern sporting rifles. The three tick posts draw the eye to the center for rapid acquisition at close range, while the drop compensation allows for rapid engagement of targets throughout the platform's effective range.

» SCP3-18IEBG4 / 1-8X18mm / RG (pg.047)

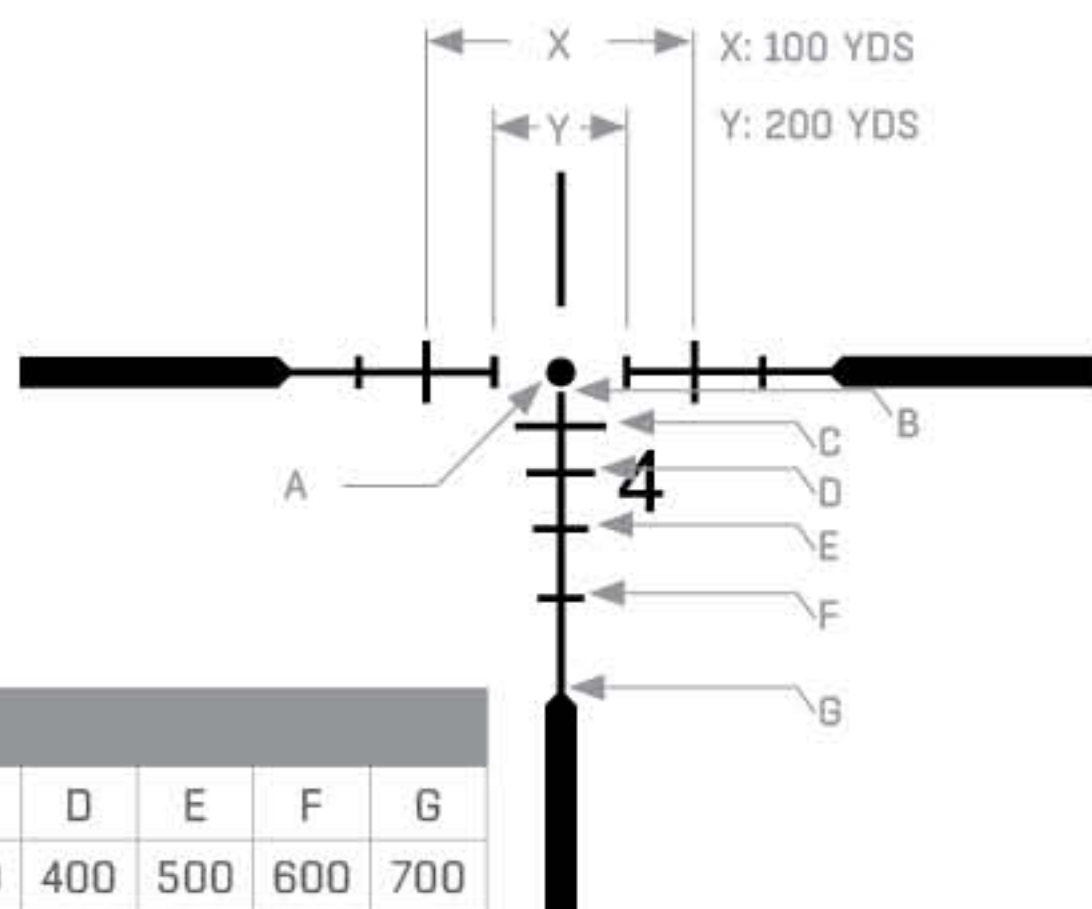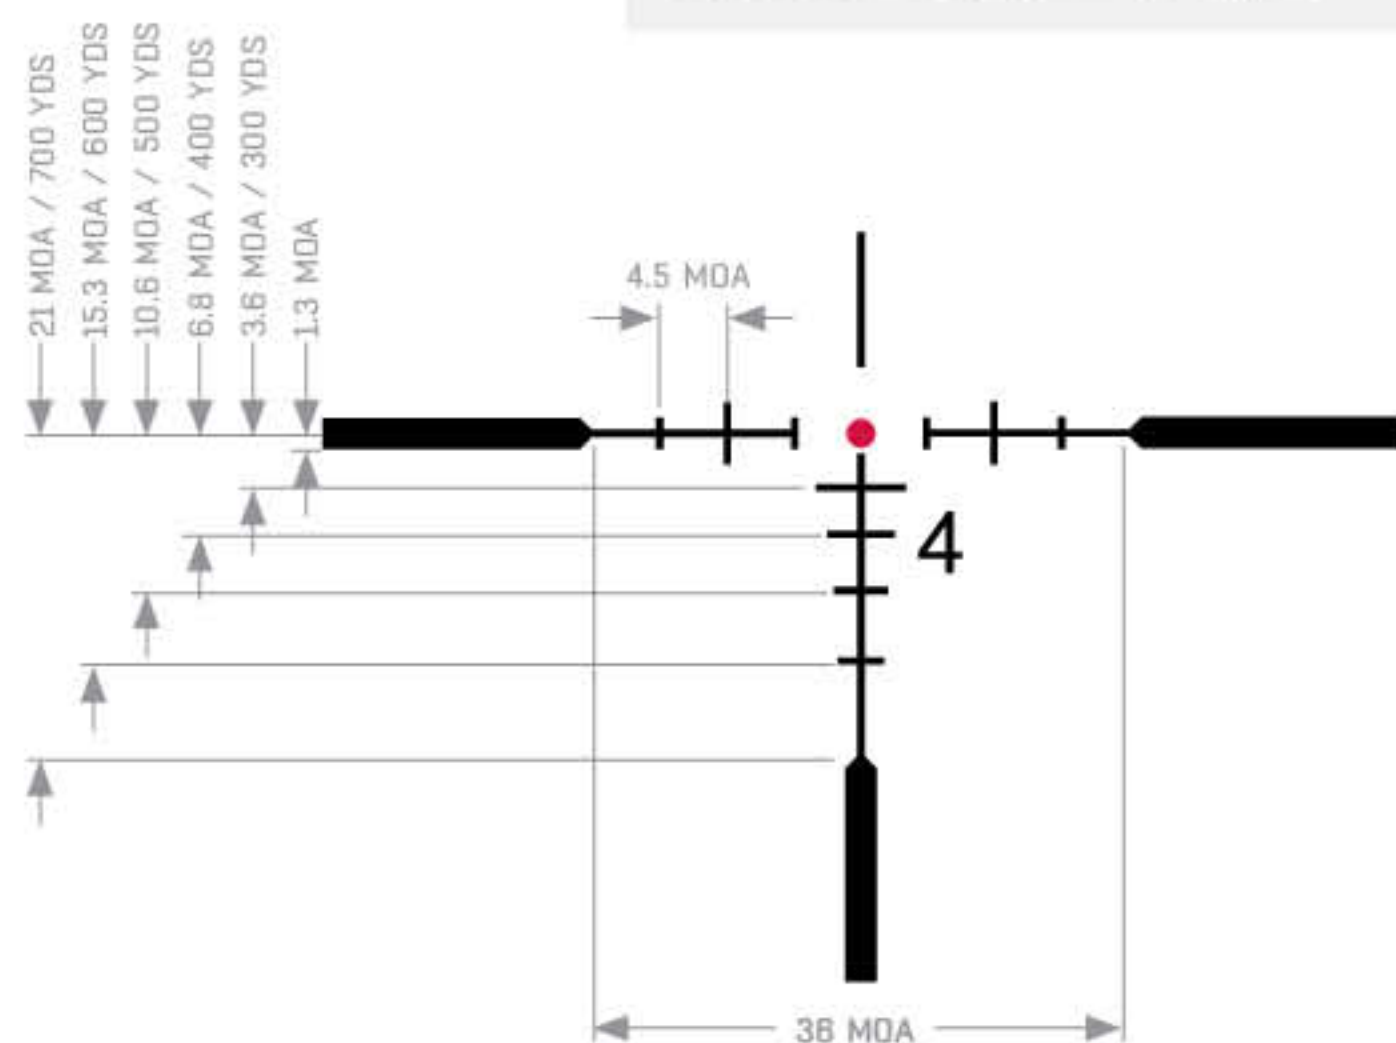

### RETICLE BREAKDOWN


POA	A	B	C	D	E	F	G
POI (Yards)	100	200	300	400	500	600	700

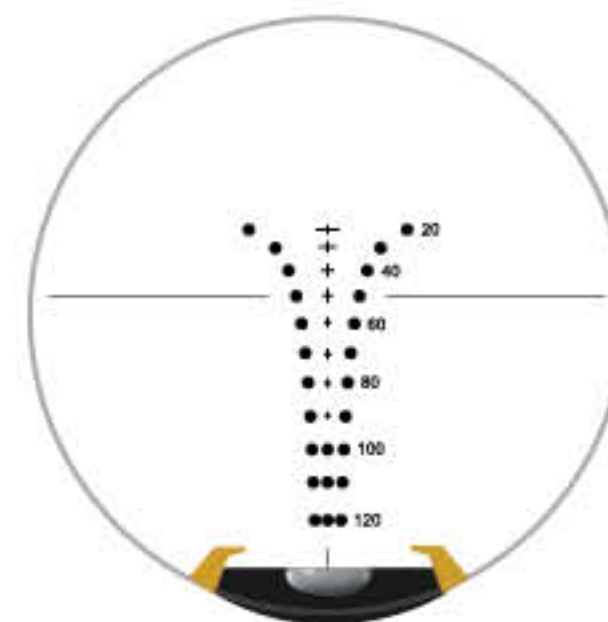

## 130 HUNTER BDC GLASS RETICLE / SFP

The 130 Hunter reticle features a "through the viewfinder" bubble leveler located at the 6 o'clock and ballistic drop compensation and range estimating markers out to 130 yards. Markers found down the central spine of the reticle illuminate and are calibrated to match crossbow ballistics from 20 yards up to 130 yards using 10 yard increments. The center of the reticle marker is calibrated for a 50 yard target distance for general ease of use.

» DP3-G1563CRWQ / 1.5-6X36mm / RG (pg.053)

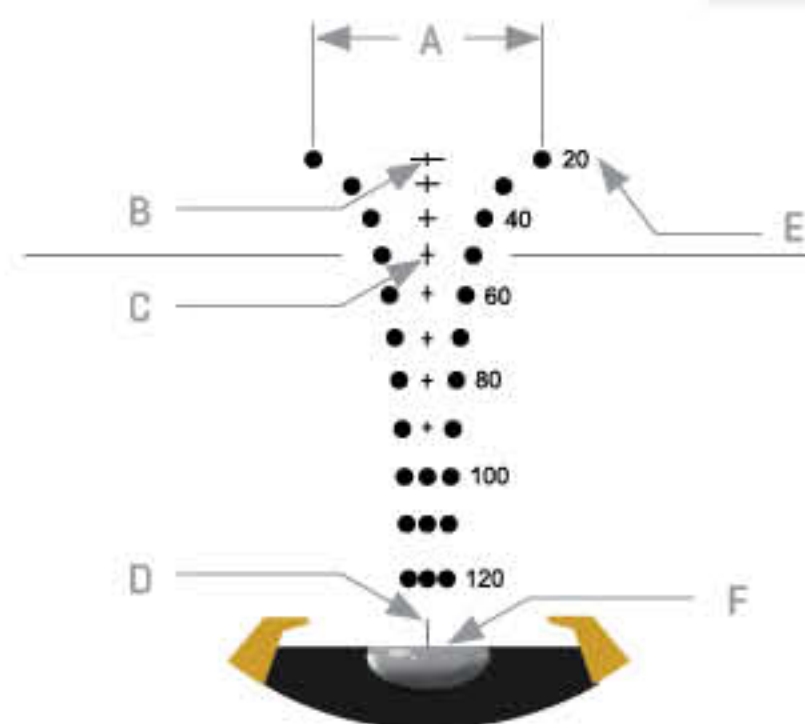



### RETICLE BREAKDOWN

A	The length span between dot pairs
B	Point of aim marker for a target 20 yards away
C	Point of aim marker for a target 50 yards away
D	Point of aim marker for a target 130 yards away
E	Quick reference yardage indicators
F	Bubble Leveler

## PRO 5-STEP WIRE RETICLE / SFP

The Pro 5-step reticle is designed for crossbows. The reticle consists of five horizontal lines and a vertical line, with a thin center crosshair. The horizontal lines are for aiming at 10, 20, 30, 40, and 50 yard distances, calibrated for 300fps crossbows.

» SCP-M4CR5WQ / 4X32mm / RG (pg.053)

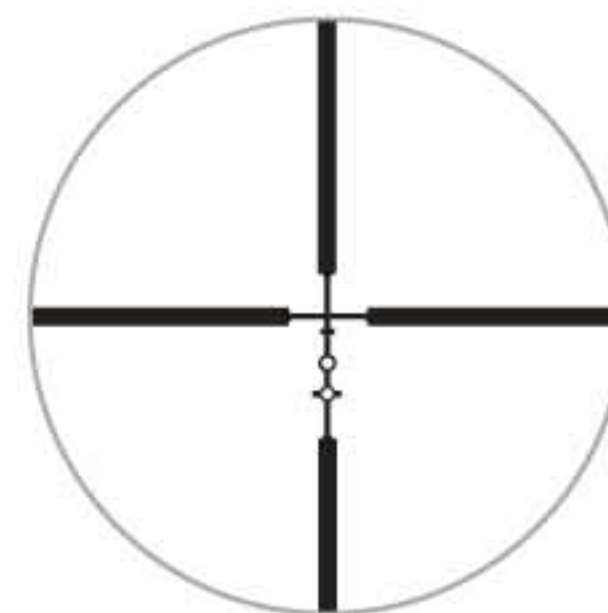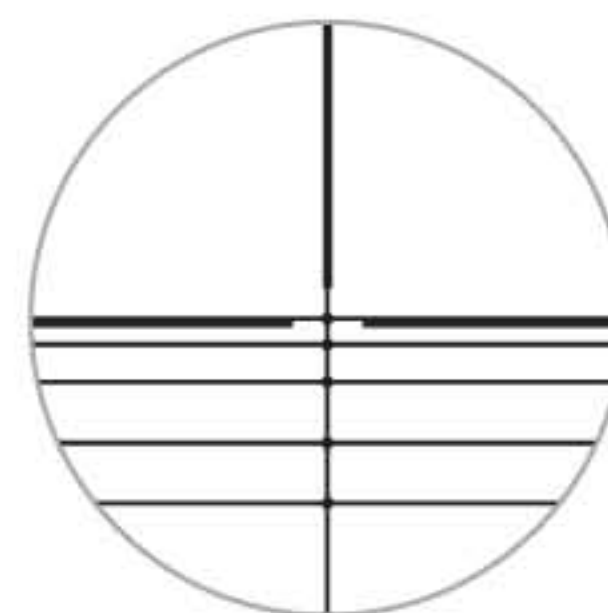


## PDC WIRE RETICLE / SFP

The Projectile Drop Compensation (PDC) reticle uses different bars and circles arranged at designated heights to aid in range estimation and serve as aiming points set at predetermined distances. This enables easy and rapid target engagement at multiple ranges.

» SCP-27PRGW / 2-7X32mm / RG (pg.055)




# MRAD RETICLES

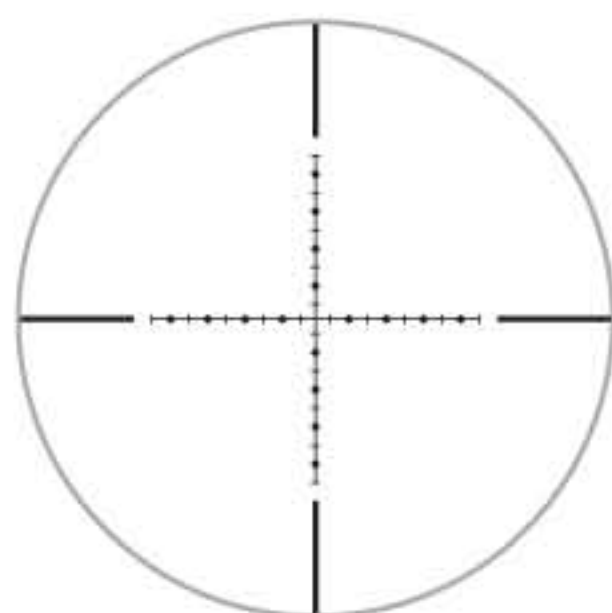

## MIL-DOT GLASS RETICLE / SFP

The crosshair has dots and dashes spread equally along the X and Y axis. The distance between two adjacent marks subtends to 1 milli-radian. The etched-glass reticle offers our discerning users the sharpest Mil-dot reticle for precise range estimation.


» SCP3-274LADIEW / 2-7X44mm / IE 36-Color (pg.055)

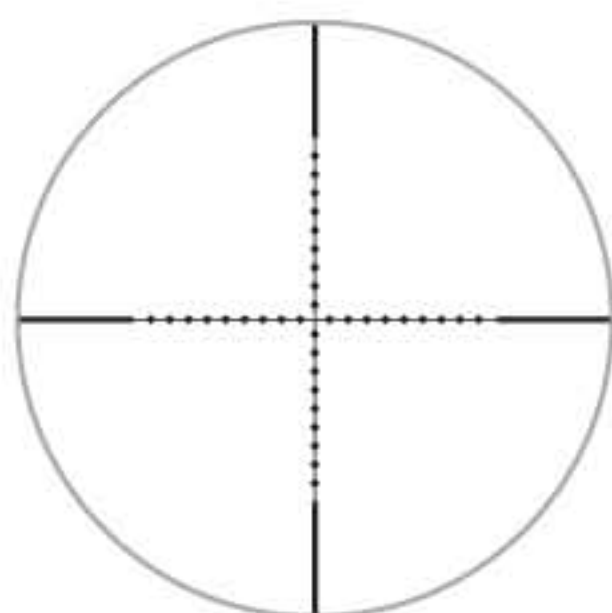

## MIL-DOT WIRE RETICLE / SFP

The crosshair has multiple dots spread equally along the X and Y axis. The distance between two adjacent marks subtends to 1 milli-radian. The traditional wire reticle is robust and holds up against strong recoil and offers a clear aiming reference without compromise.

- » SCP3-U312ADIEW / 3-12X44mm / IE 36-Color (pg.045)
- » SCP3-U416ADIEW / 4-16X44mm / IE 36-Color (pg.045)
- » SCP3-UM312ADIEW / 3-12X44mm / IE 36-Color (pg.045)
- » SCP3-UM416ADIEW / 4-16X44mm / IE 36-Color (pg.045)
- » SCP-M392ADIEWQ / 3-9X32mm / IE 36-Color (pg.049)
- » SCP-U394ADIED / 3-9X40mm / IE 36-Color (pg.051)
- » SCP-U394ADIEW / 3-9X40mm / IE 36-Color (pg.051)
- » SCP-U4164ADIEW / 4-16X40mm / IE 36-Color (pg.051)
- » SCP-U6245ADIEW / 4-24X50mm / IE 36-Color (pg.051)
- » SCP-M392ADLWQ / 3-9X32mm / RG (pg.049)
- » SCP-U432FD / 4X32mm / RG (pg.051)
- » SCP-M312AOD / 3-12X32mm (pg.049)
- » SCP-M312AOWQ / 3-12X32mm (pg.049)

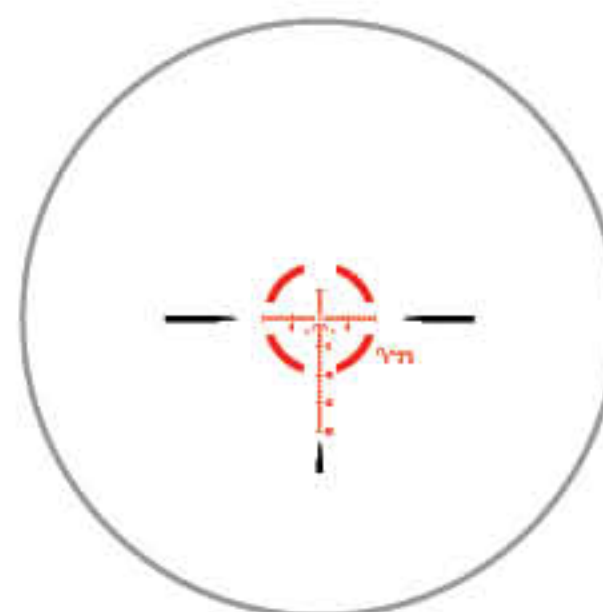

## M3 MRAD GLASS RETICLE / FFP


### THE RIFLEMAN'S CQB IN MIL

Cover your bases no matter your target with this multi-disciplinary reticle.

At 1X a T-Dot enclosed in a 17.5 Mil segmented circle makes closeup work quick and to the point. Illumination option included.

At higher magnifications with farther targets leverage the crisp 0.3 Mil center dot and up to 20 Mils in vertical holdover with hashmarks in 0.5 Mil increments out to 5 Mil and 1 Mil increments after that. For even more precision use up to 10 Mil holds left or right and range estimation out to 600 yards. feature 1-2 Mils of 0.1 Mil increments for finer measurements.

» IX801FM3 / 1-8X28mm / RG (pg.023) **NEW**

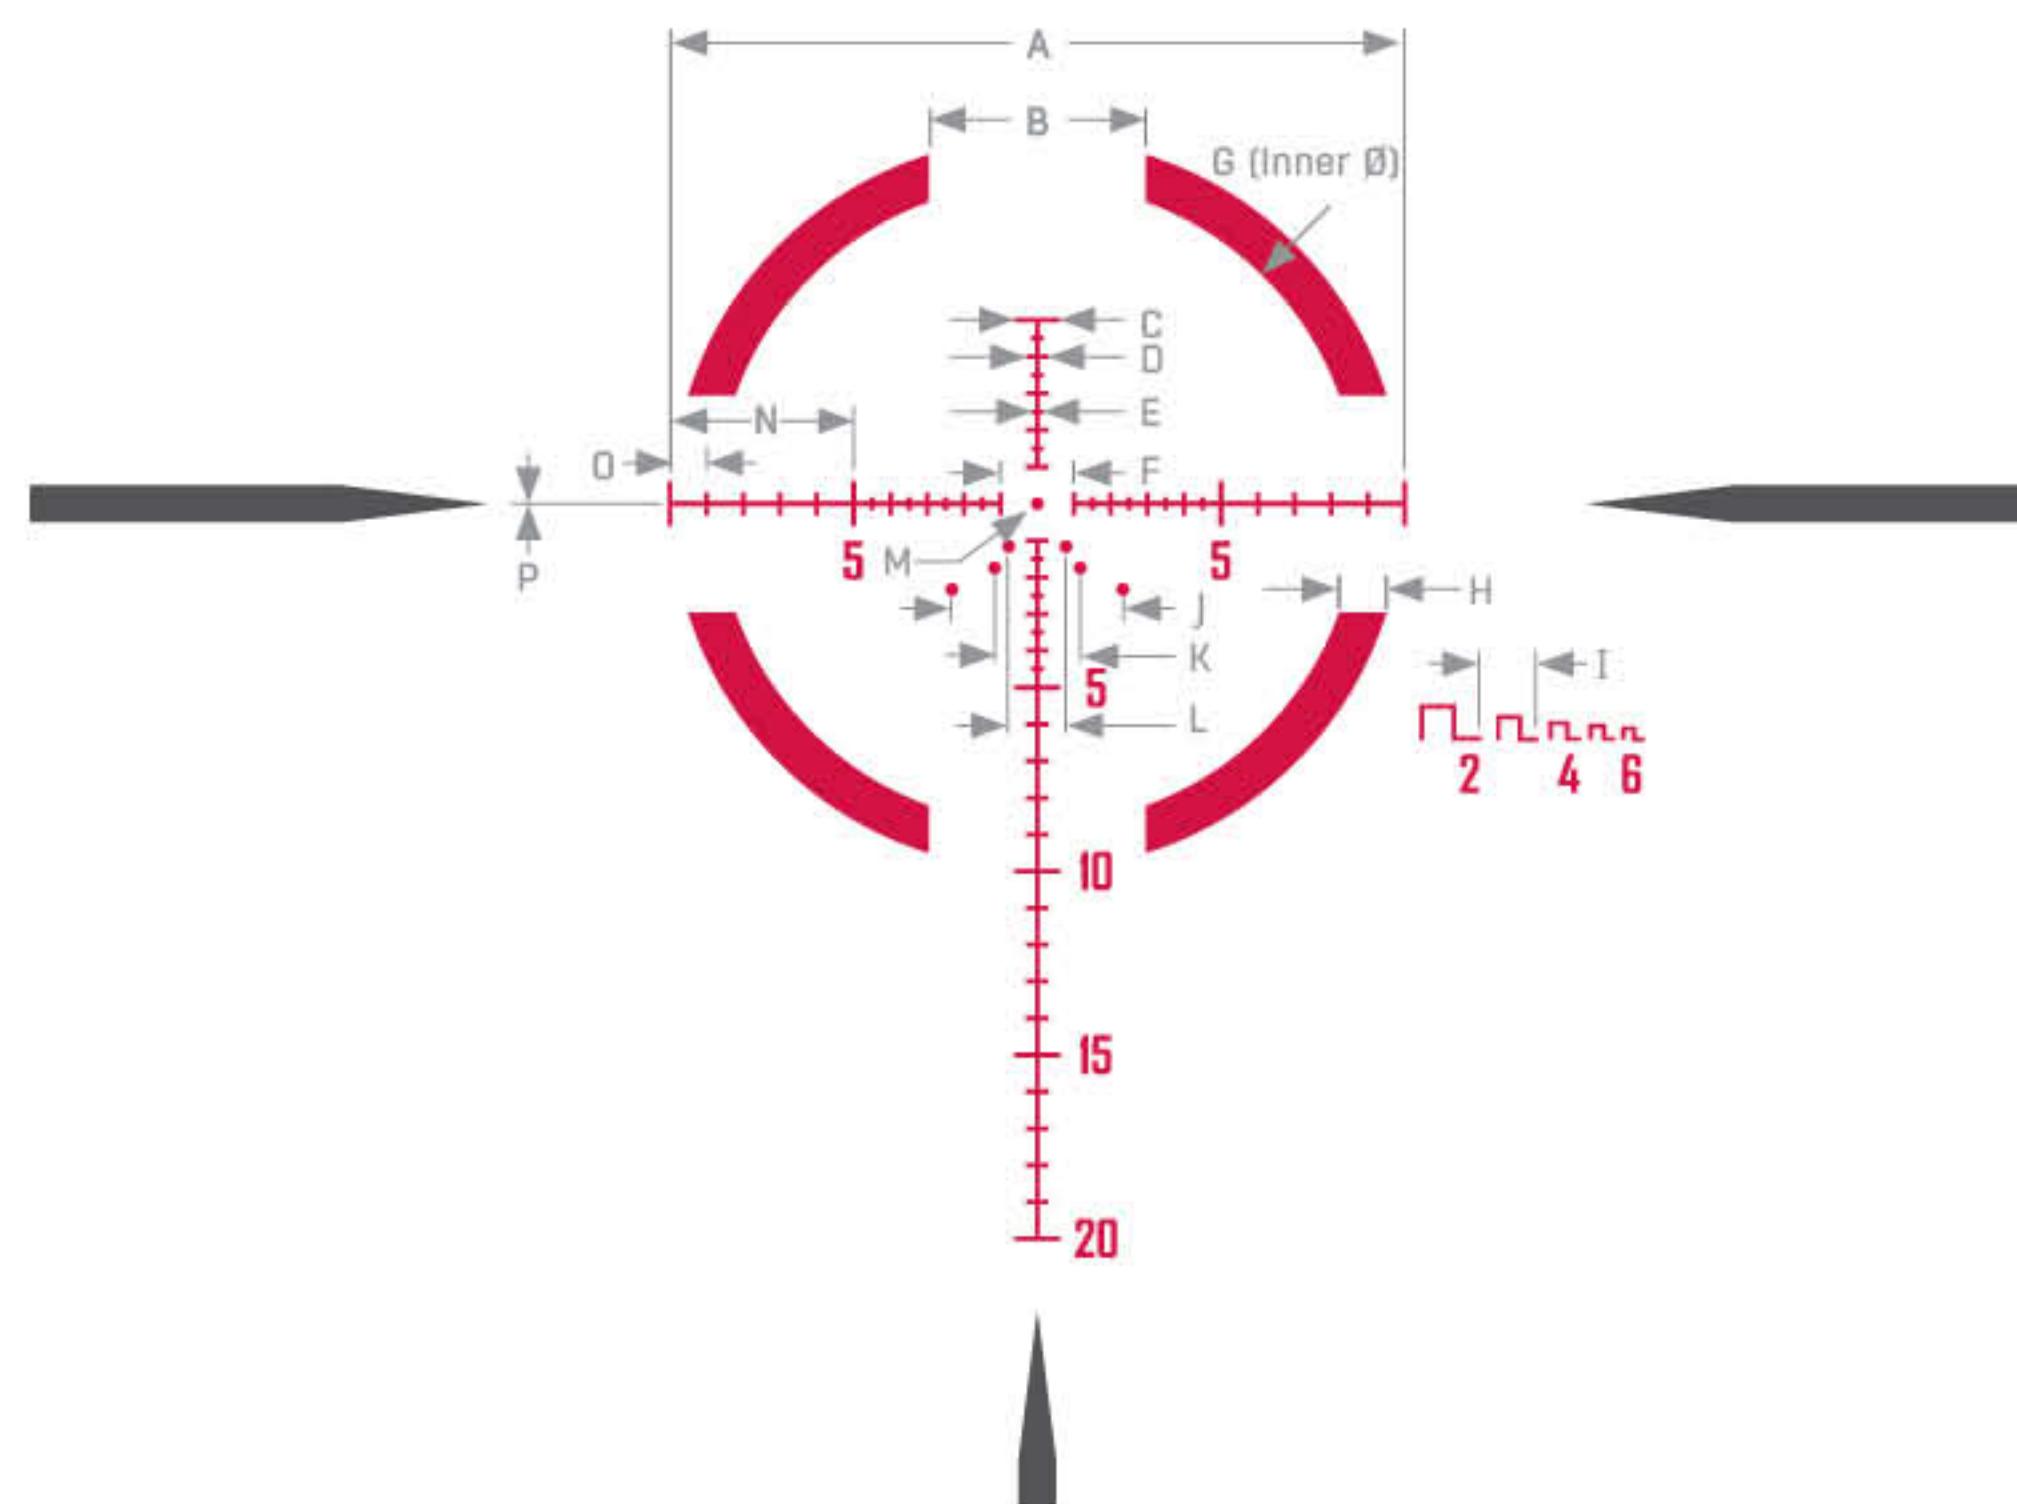

### 18 INCH TARGET RANGING



Unit	L	M	N	Q
18in @ __ yards	300	100	200	300

### RETICLE BREAKDOWN

Unit	A	B	C	D	E	F	G	H	M	N	O	P
MRAD	20	6	1.16	0.58	0.3	2	17.5	1.2	0.3	5	1	0.075



# MRAD RETICLES

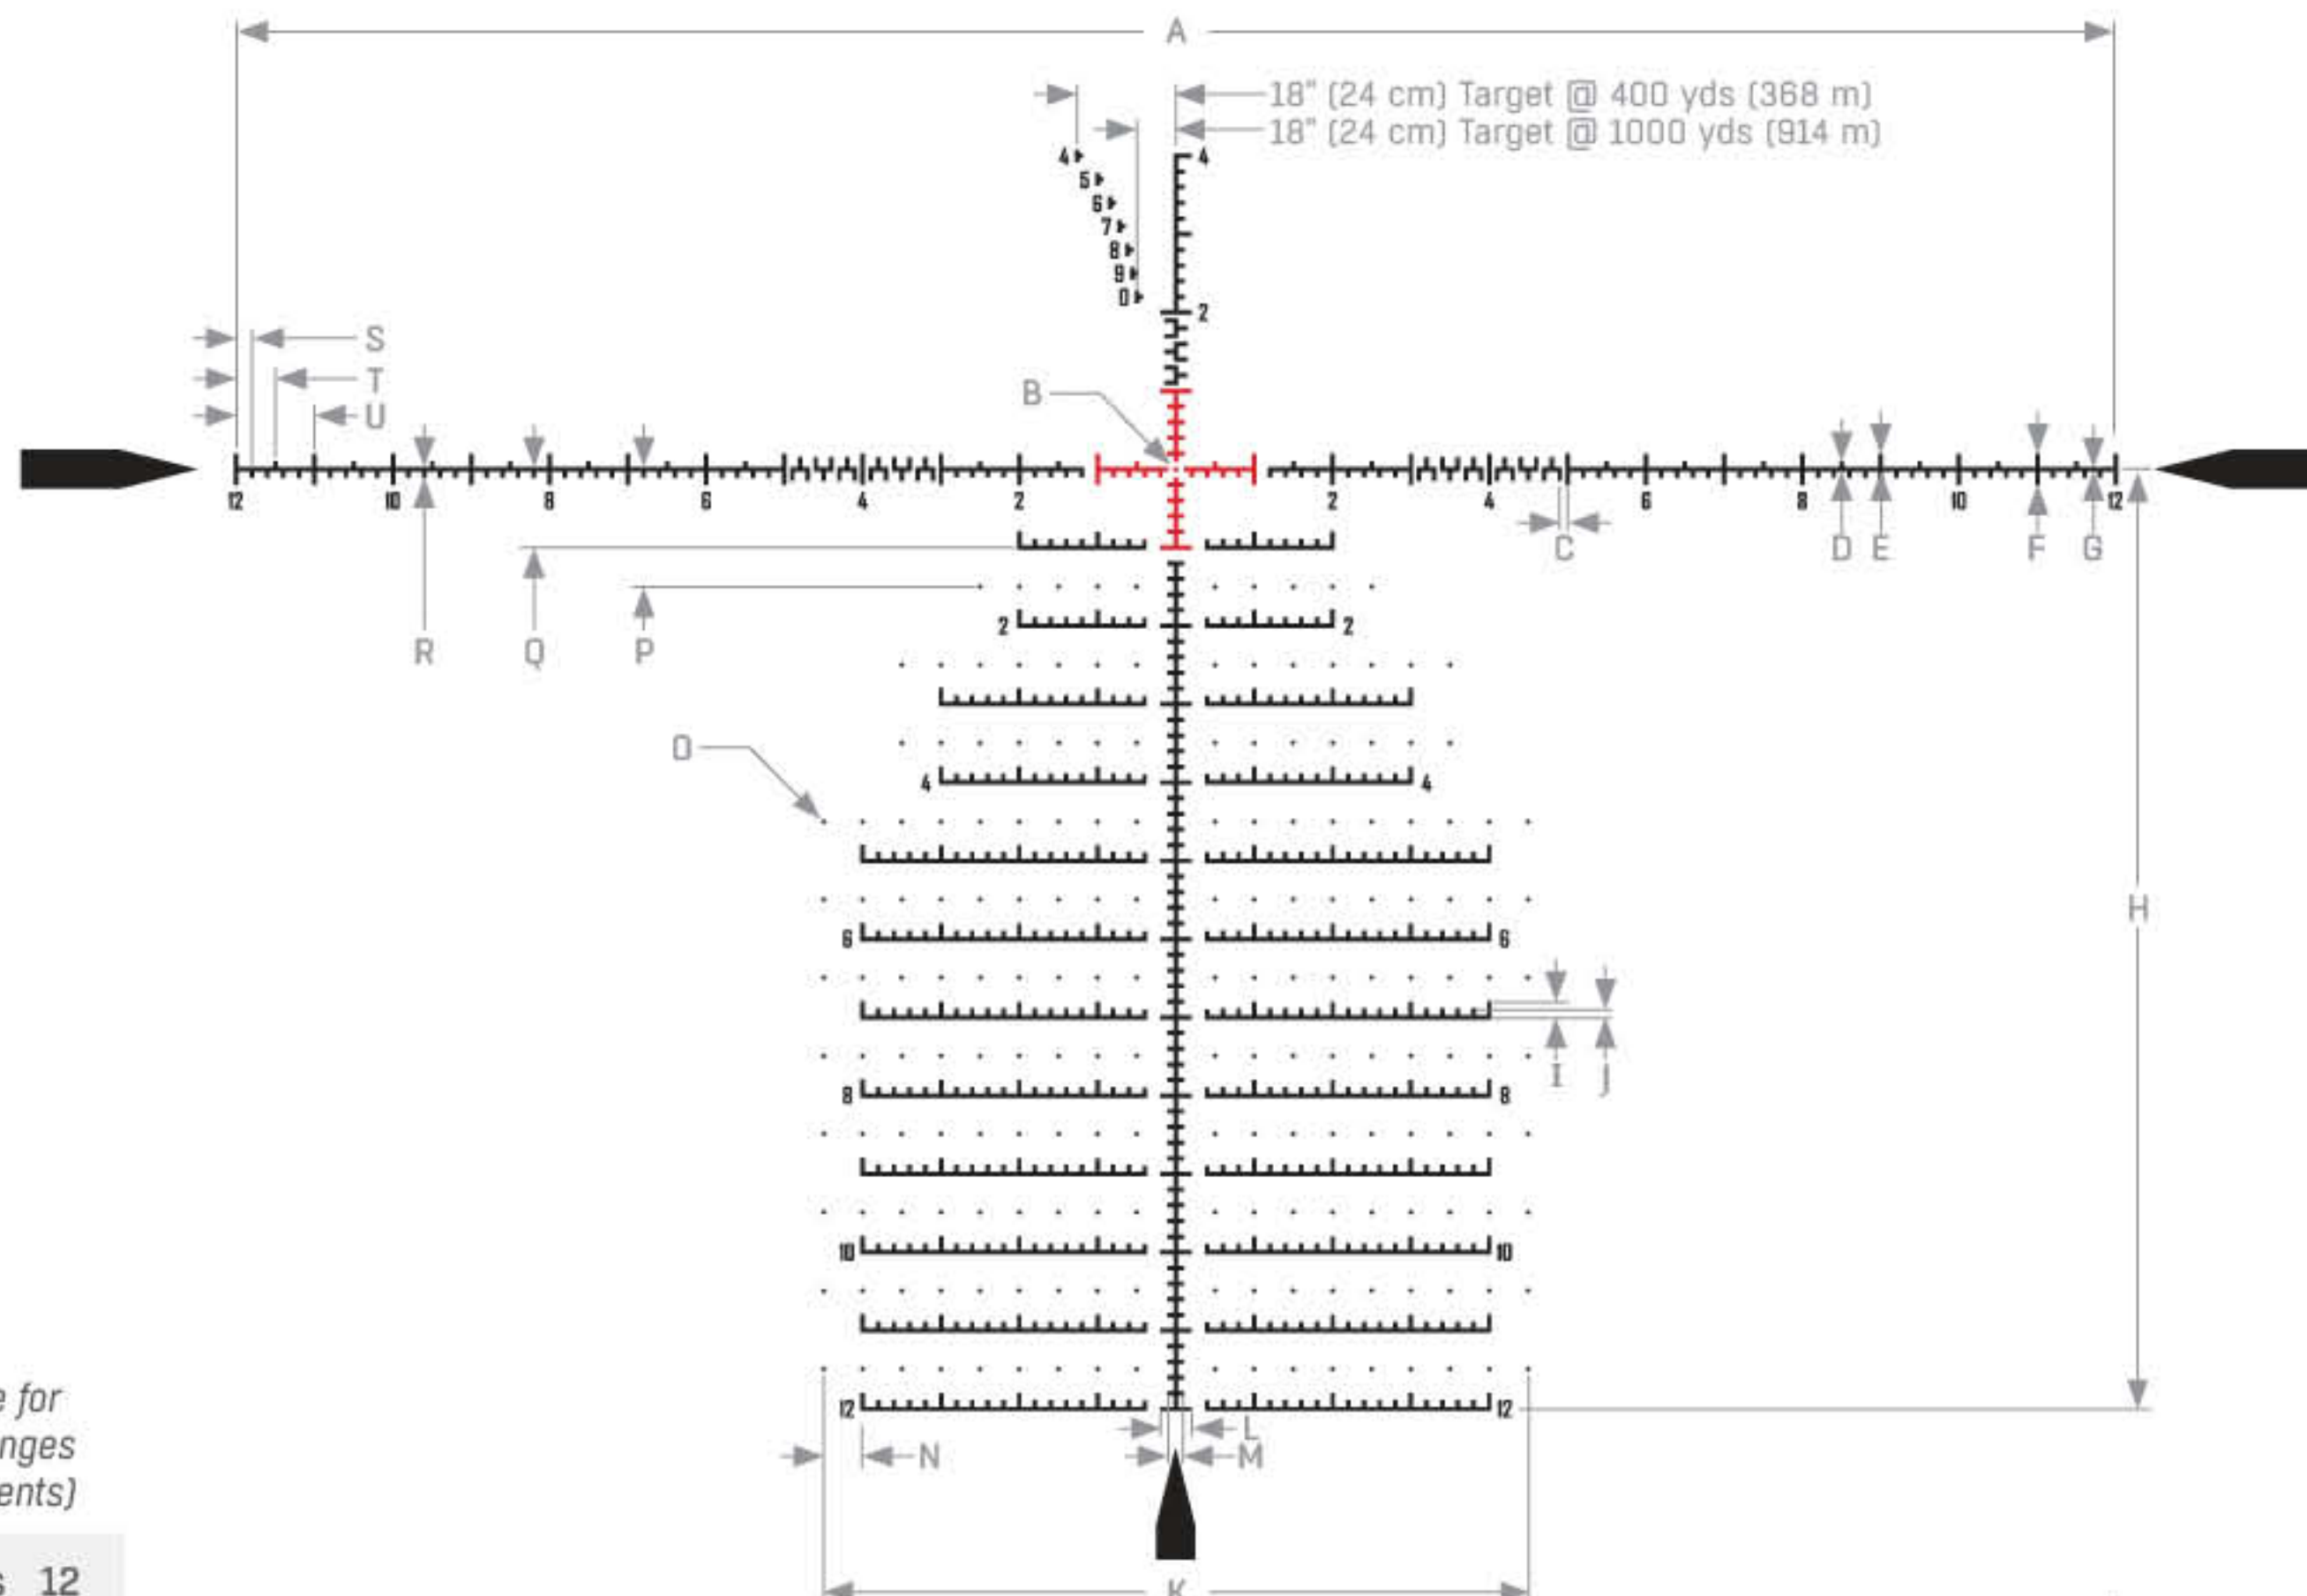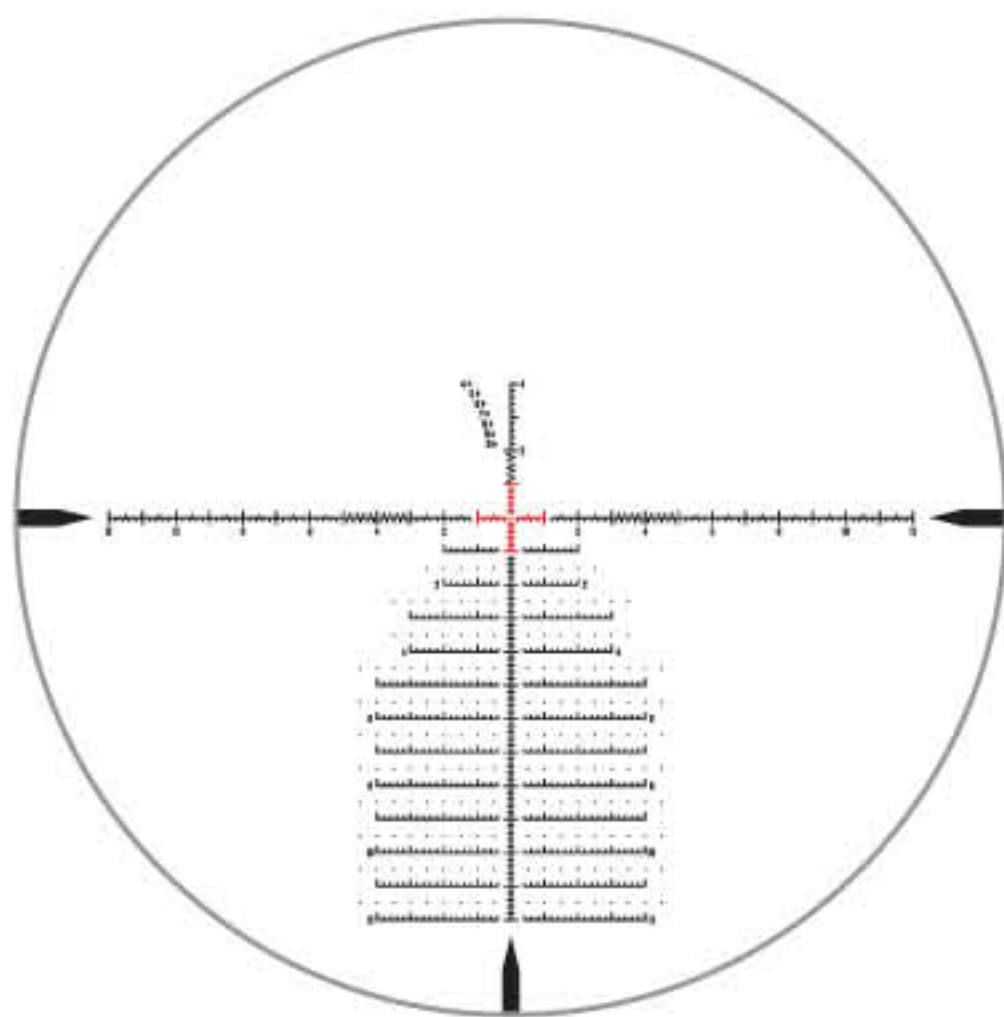

## M1 MRAD GLASS RETICLE / FFP

### THE TRADITIONALIST'S PRECISION RETICLE

A patented Mil reticle with a 0.05 Mil center dot made for true marksmen looking to challenge themselves at ranges most could not reach. (<https://www.leapers.com/patents>)

**RETICLE HOLDOVERS:** Your reticle features 12 Mil's of holdovers broken into 0.2 Mil increments for exact shot placement. Vertical and horizontal stadia feature 1-2 Mil's of 0.1 Mil increments for finer measurements.


**WIND HOLDS:** The main horizontal stadia include 24 Mil's of wind holds with 2 Mil's of 0.1 Mil increments on both sides. Do not be afraid to have fun in the wind with up to 4.5 Mil's of wind holds.

**QUICK RANGING SYSTEM:** A quick-ranging system is built into the M1 reticle, able to range an 18-inch (46 cm) width target from 400 to 1,000 yards (366 to 914 m).

**ILLUMINATION:** The first Mil of the inner crosshairs are the only illuminated parts of the reticle, preserving visibility in low-light conditions.


- » IX603FM1 / 3-18X44mm / RG (pg.025) **NEW**
- » IX645FM1 / 4.5-27X56mm / RG (pg.027) **NEW**
- » IX606FM1 / 6-36X56mm / RG (pg.028) **NEW**

18" (46 cm)

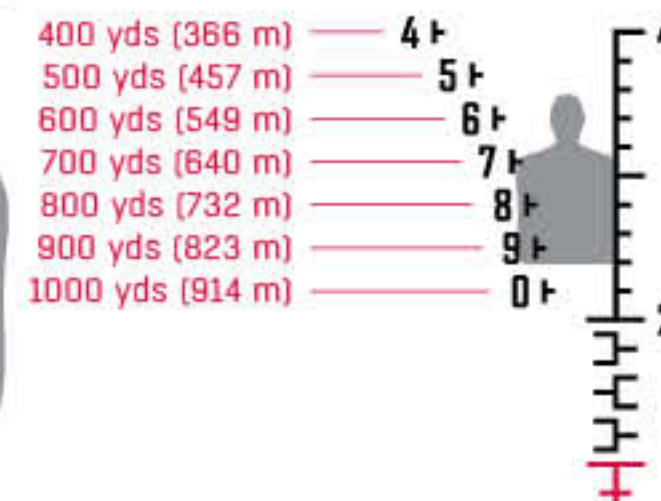


700-yard (640 m) Target

1.3 Mil Target  
18" (46 cm) Target

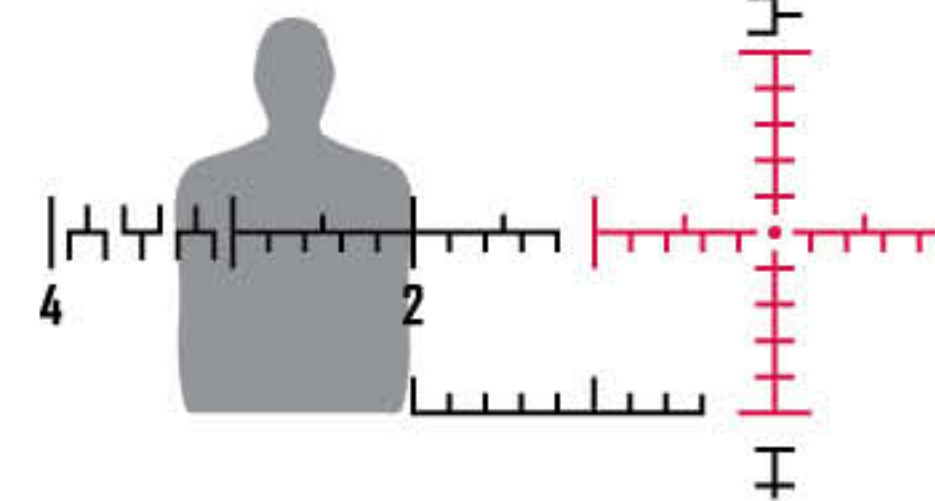

RETICLE BREAKDOWN											
Unit	A	B	C	D	E	F	G	H	I	J	K
MRAD	24	0.05	0.1	0.1	0.15	0.4	0.03	12	0.2	0.1	9
Unit	L	M	N	O	P	Q	R	S	T	U	
MRAD	0.4	0.2	0.5	0.05	1.5	1	0.1	0.2	0.5	1	



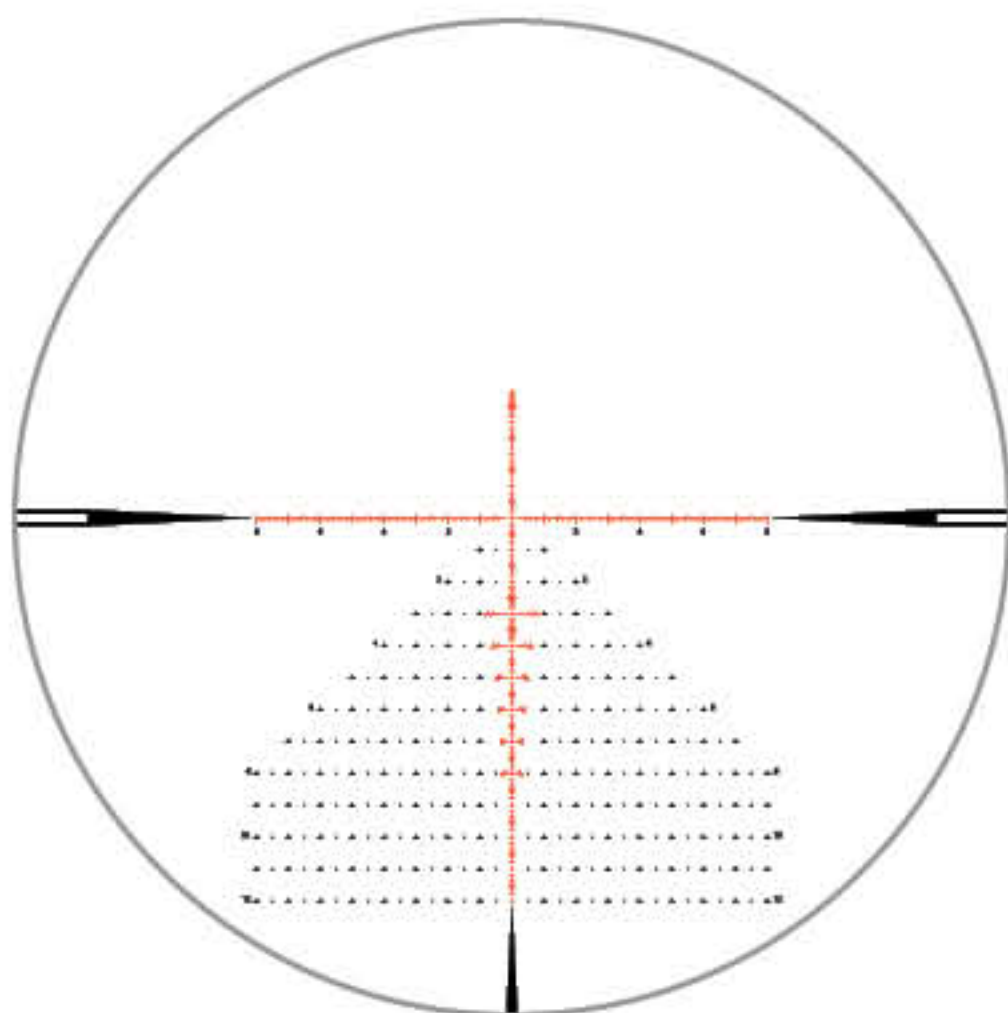

## M2 MRAD GLASS RETICLE / FFP

### THE MODERN MINIMALIST PRECISION RETICLE

A patented clutter-free design with a 0.1 Mil floating donut. Made for the tactical marksman who wants to preserve his FOV. (<https://www.leapers.com/patents>)


**DONUT RETICLE:** A precise 0.1 Mil floating donut acts as your aiming point and is replicated throughout the main vertical stadia at 1 Mil increments. The hollow center allows you see the color of your target and the color change as it moves.

**RAPID RANGING SYSTEM:** Our innovative rapid-ranging brackets range from 300 yards (274 m) to 800 yards (732 m), made for targets of varying widths: 6-9 inches (15-23 cm) or 12-18 inches (30-46 cm). Markings at 18, 16, 14, and 12 inches (46, 41, 36, and 30 cm) as well as halfway points allow for even finer measurement.

**HOLDOVERS:** Leverage 12 Mil of holdover and maximize field of view with a wide-open top half which includes another 4 Mils of hold-under. Main crosshairs have 0.2 Mil increments with 0.5 Mil markings at the center of each segment. Additionally both directions feature 2 Mils of 0.1 Mil increments for finer measurements.

**WIND HOLDS:** Floating donut wind holds are spaced in 1 Mil increments up to 8 Mils left or right, complemented by 0.05 Mil dots for 0.5 Mil holds. Wind holds feature 0.1 Mil wings to help your eye follow the line of donuts, while giving you space to see your impacts.

**ILLUMINATION:** The main crosshairs and ranging brackets are the only illuminated parts of the reticle, enhancing visibility in low-light conditions.

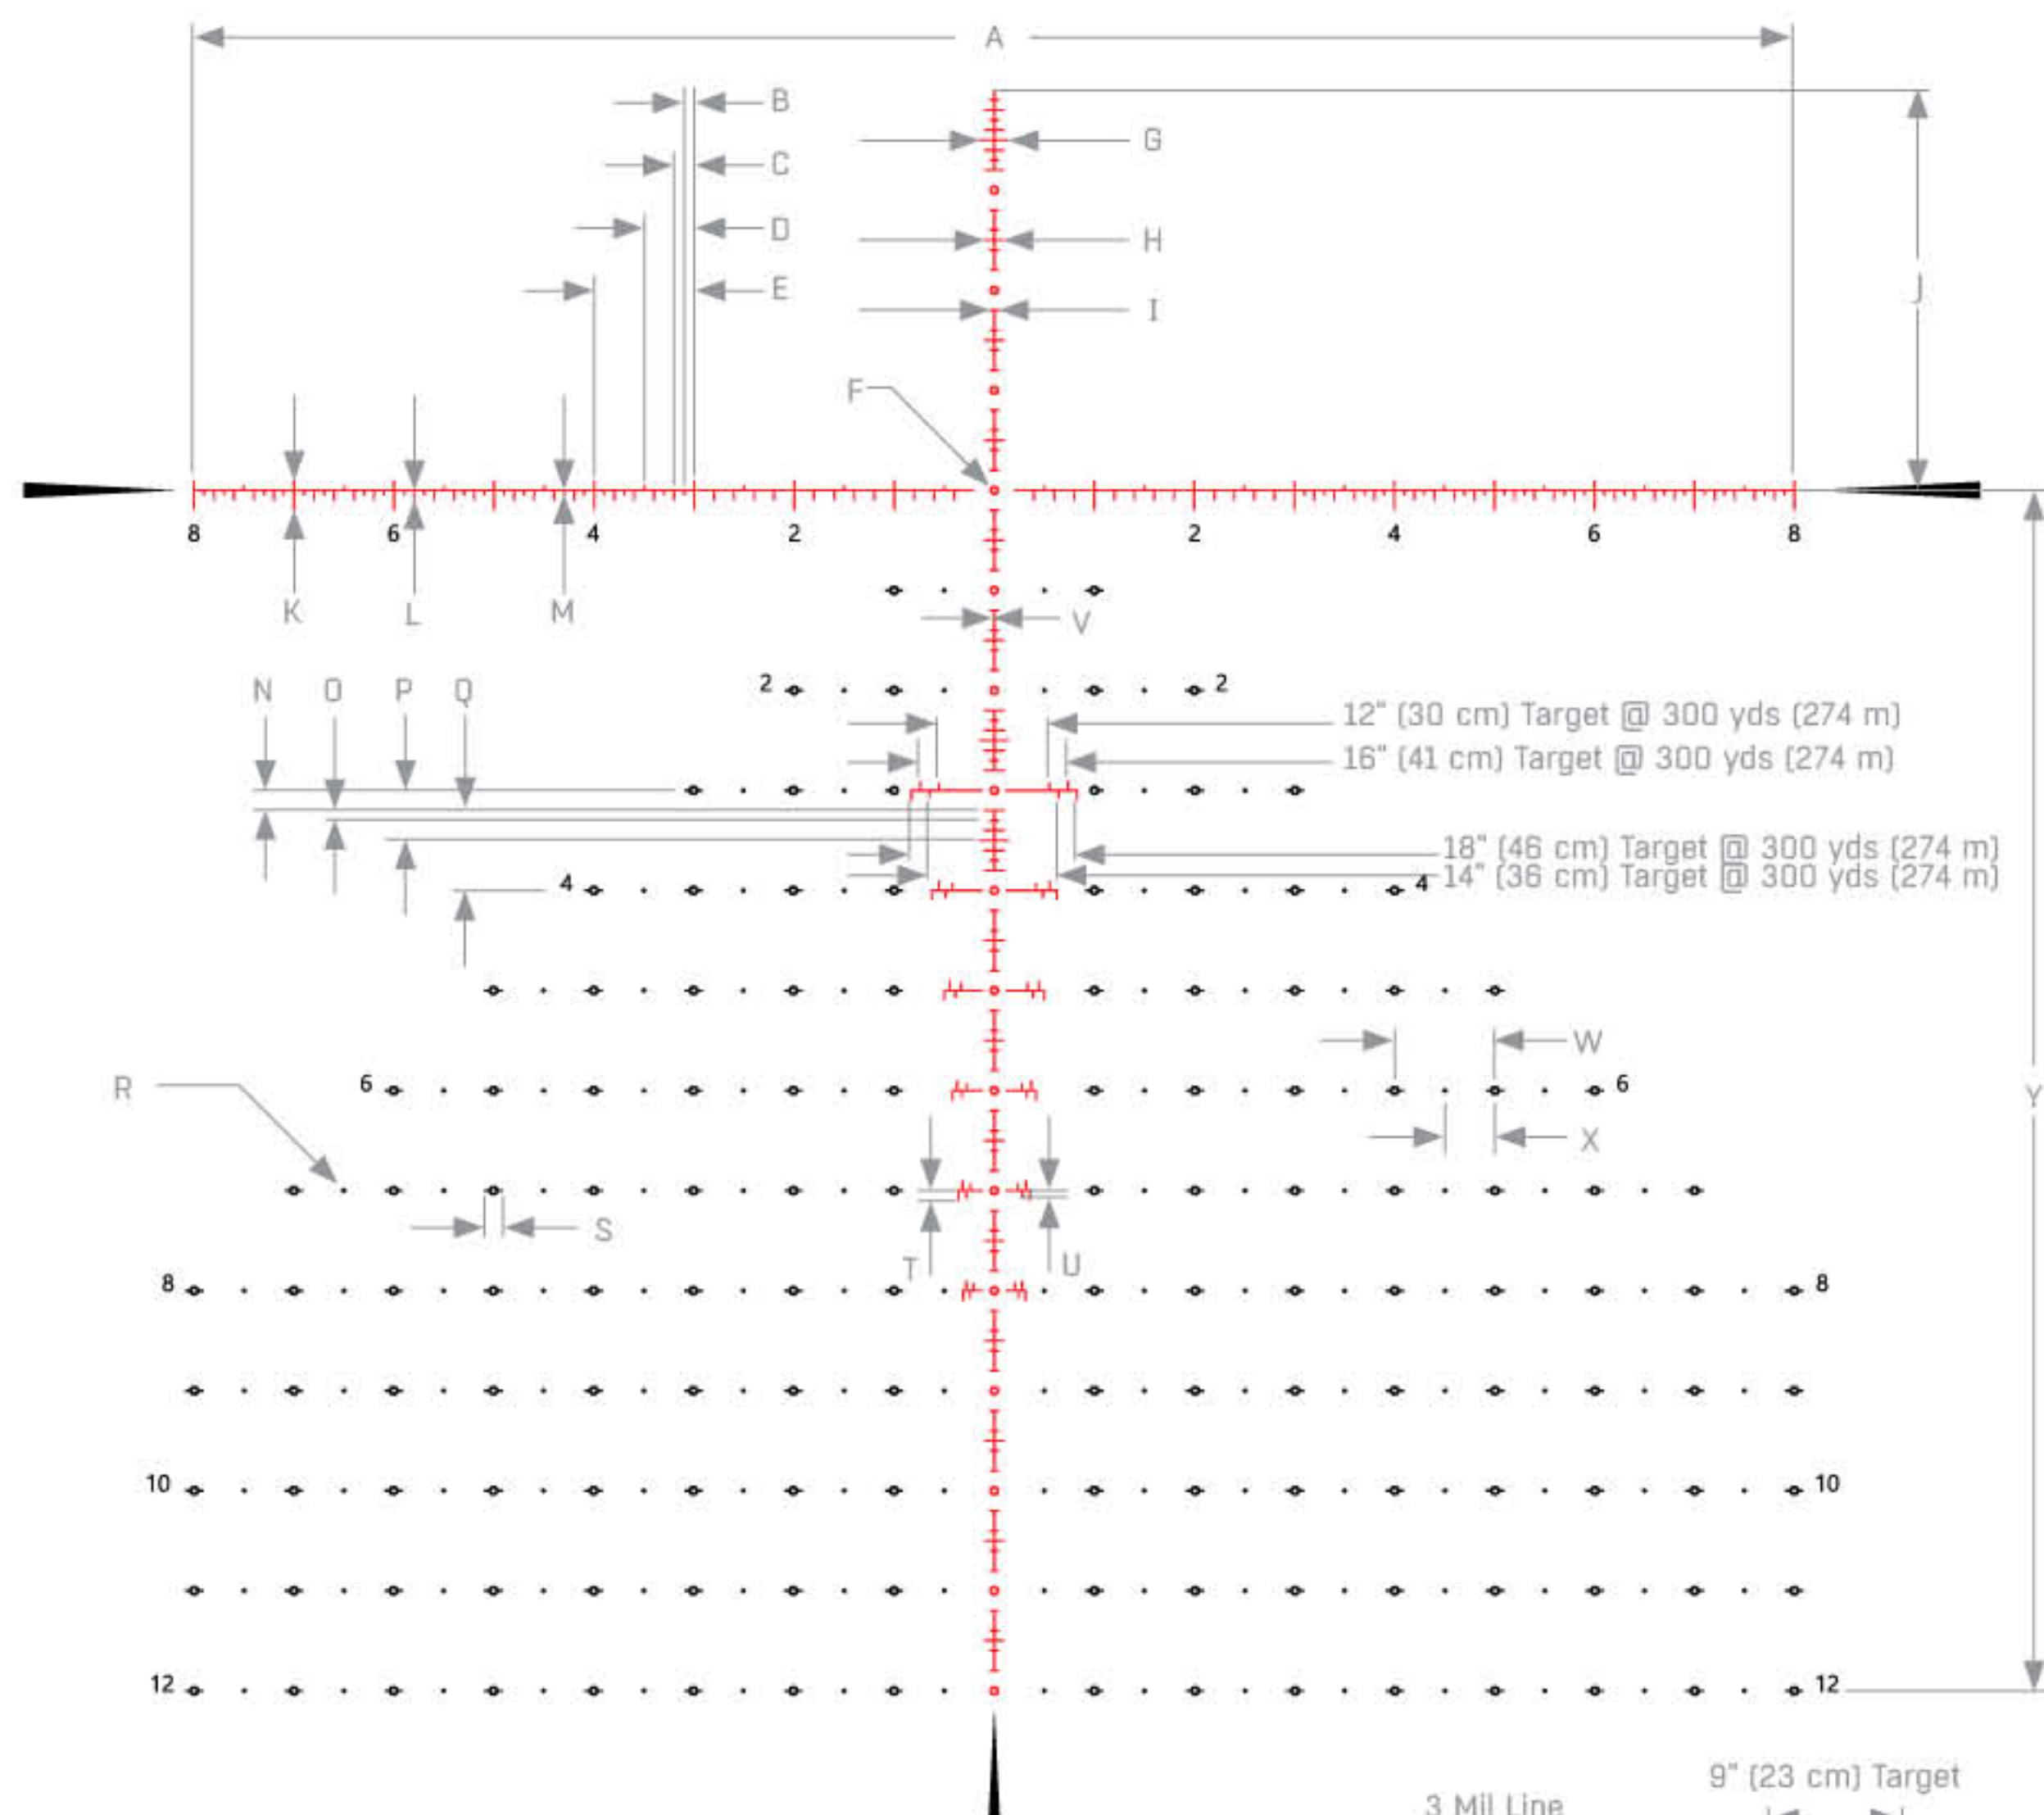


RETICLE BREAKDOWN									
Unit	A	B	C	D	E	F	G	H	
MRAD	16	0.1	0.2	0.5	1	0.1	0.3	0.2	
Unit	I	J	K	L	M	N	O	P	
MRAD	0.1	4	0.3	0.1	0.05	0.2	0.1	0.5	
Unit	Q	R	S	T	U	V	W	X	Y
MRAD	1	0.05	0.12	0.1	0.075	0.02	1	0.5	12

» IX645FM1 / 4.5-27X56mm / RG (pg.027) **NEW**  
» IX606FM1 / 6-36X56mm / RG (pg.029) **NEW**



# SPECIFICATIONS

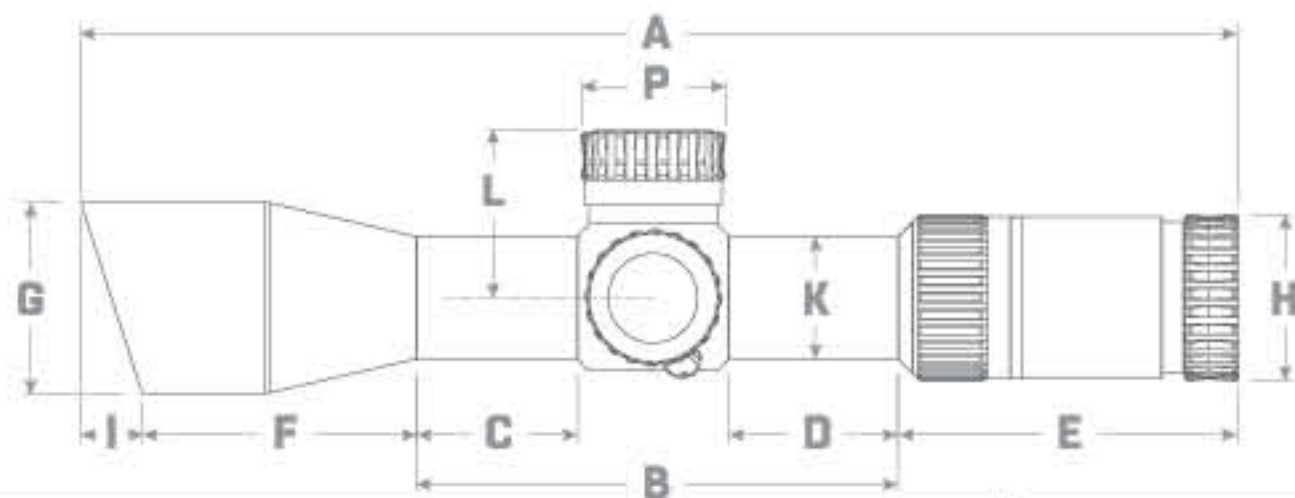

# FIND WHAT

	DIMENSIONS (NOTE: DIMENSIONS MEASURED IN INCHES)										MAGNIFICATION		OBJECTIVE DIA.	TUBE DIA.	FOCAL PLANE	RETICLE	ILLUMINATION	ANGULAR FOV	LINEAR FOV		
	A	B	C	D	E	F	G	H	I	J	Low	High	mm				degrees	ft @ 100 yds	m @ 100 m		
INTEGRIX®																					
IX801FA1	10.91	6.46	2.17	2.64	3.39	1.06	1.38	1.81	-	1.65	1	8	28	34 mm	FFP	Glass	A1 MOA	RG	21.8-2.7	115.5-14.1	38.5-4.7
IX801FM3	10.91	6.46	2.17	2.64	3.39	1.06	1.38	1.81	-	1.65	1	8	28	34 mm	FFP	Glass	M3 MRAD	RG	21.8-2.7	115.5-14.1	38.5-4.7
IX801SA3	10.91	6.46	2.17	2.64	3.39	1.06	1.38	1.81	-	1.65	1	8	28	34 mm	SFP	Glass	A3 MOA	RG	21.8-2.7	115.5-14.1	38.5-4.7
IX603FA2	11.89	5.28	1.77	1.85	3.46	3.15	2.09	1.81	-	1.66	3	18	44	34 mm	FFP	Glass	A2 MOA	RG	7.2-1.2	37.7-6.3	12.6-2.1
IX603FM1	11.89	5.28	1.77	1.85	3.46	3.15	2.09	1.81	-	1.66	3	18	44	34 mm	FFP	Glass	M1 MRAD	RG	7.2-1.2	37.7-6.3	12.6-2.1
IX645FM1/M2	14.13	5.71	1.97	1.97	3.46	4.96	2.56	1.81	-	1.77	4.5	27	56	34 mm	FFP	Glass	M1/M2 MRAD	RG	4.8-0.8	25.1-4.2	8.4-1.4
IX606FM1/M2	15.08	6.22	2.20	2.20	3.74	5.12	2.56	1.89	-	1.82	6	36	56	34 mm	FFP	Glass	M1/M2 MRAD	RG	4.3-0.7	22.5-3.9	7.5-1.3
IXF45SA3/A4	9.05	4.92	1.97	1.38	2.95	1.18	1.38	1.85	-	1.57	4.5	-	28	34 mm	SFP	Glass	A3/A4 MOA	RG	5.72	30	10
ACCUSHOT PRO™																					
AS601FA1	10.00	6.57	3.31	1.65	3.46	-	1.34	1.77	-	1.61	1	6	24	34 mm	FFP	Glass	A1 MOA	RG	21.8-3.6	115.5-18.9	38.5-6.3
AS303FA2	9.39	4.37	1.57	1.18	2.95	2.07	1.71	1.69	-	1.62	3	9	36	34 mm	FFP	Glass	A2 MOA	RG	7.4-2.5	38.8-12.9	12.9-4.3
AS403FA2	10.10	4.37	1.42	1.34	3.03	2.68	2.01	1.77	-	1.61	3	12	42	34 mm	FFP	Glass	A2 MOA	RG	7.4-1.9	38.8-9.7	12.9-3.2
UTG®																					
SCP3-18IEBQ4	9.8	4.5	1.6	1.6	3.8	1.5	1.4	1.6	0.4	1.3	1	8	28	30 mm	SFP	Glass	BG4	IE 36-Color	18.8-2.5	99.5-13.0	33.1-4.4
SCP3-U416A0IEW	14.4	6.8	3.0	2.4	3.9	3.7	2.1	1.7	1.0	1.4	4	16	44	30 mm	SFP	Wire	Mil-dot	IE 36-Color	4.7-1.3	24.4-6.8	8.2-2.3
SCP3-UM312A0IEW	9.8	4.0	1.3	1.4	2.9	3.1	2.1	1.6	0.6	1.3	3	12	44	30 mm	SFP	Wire	Mil-dot	IE 36-Color	6.1-1.9	32.0-10.0	10.7-3.3
SCP3-UM416A0IEW	10.6	4.4	1.6	1.5	3.1	3.1	2.1	1.6	0.6	1.3	4	16	44	30 mm	SFP	Wire	Mil-dot	IE 36-Color	5.0-1.5	26.2-7.85	8.7-2.6
OP3-GM3124UMOA	10.2	4.0	1.2	1.2	3.1	3.0	2.1	1.6	-	1.6	3	12	44	30 mm	SFP	Glass	UMOA	IE 36-Color	6.1-1.9	32-10	10.7-3.3
OP3-GM4164UMOA	10.7	4.2	1.4	1.4	3.1	3.3	2.1	1.6	-	1.5	4	16	44	30 mm	SFP	Glass	UMOA	IE 36-Color	5.0-1.5	26.2-8	8.7-2.6
SCP-M312A0D	8.1	3.7	1.3	1.2	2.2	2.1	1.5	1.5	-	1.2	3	12	32	1 in	SFP	Wire	Mil-dot	-	5.9-1.9	31.0-10.0	10.3-3.1
SCP-M312A0WQ	8.1	3.7	1.3	1.2	2.2	2.1	1.5	1.5	-	1.2	3	12	32	1 in	SFP	Wire	Mil-dot	-	5.9-1.9	31.0-10.0	10.3-3.1
SCP-M392A0LWQ	8.1	3.3	1.1	1.1	2.2	2.5	1.8	1.5	-	1.2	3	9	32	1 in	SFP	Wire	Mil-dot	RG	7.2-2.7	37.7-14.0	12.6-4.7
SCP-U394A0IEW	12.6	4.6	1.7	1.7	3.6	4.4	2.0	1.6	-	1.4	3	9	40	1 in	SFP	Wire	Mil-dot	IE 36-Color	6.8-2.3	35.6-12.0	11.9-4.0
SCP-U4164A0IEW	14.6	6.0	2.3	2.4	3.7	5.0	2.0	1.6	-	1.3	4	16	40	1 in	SFP	Wire	Mil-dot	IE 36-Color	4.4-1.1	23.0-6.0	7.7-1.9
SCP-U432FD	11.7	5.8	2.4	2.2	2.9	3.0	1.7	1.6	0.6	1.2	4	-	32	1 in	SFP	Wire	Mil-dot	-	6.1	32.0	10.7
SCP-U6245A0IEW	15.2	6.5	2.6	2.6	3.7	5.1	2.4	1.6	-	1.2	6	24	50	1 in	SFP	Wire	Mil-dot	IE 36-Color	2.7-0.8	14.4-4.1	4.7-1.4
OP3-G1563CRWQ	8.3	3.5	1.2	1.1	2.9	1.9	1.7	1.7	-	1.3	1.5	6	36	30 mm	SFP	Glass	130 Hunter	RG	10-2.7	52.5-13.98	17.5-4.7
SCP-M4CR5WQ	8.2	3.5	1.2	1.2	2.0	2.1	1.7	1.5	0.4	1.2	4	-	32	1 in	SFP	Wire	PRO 5-Step	RG	5.2	27.2	9.1
SCP-27PRGW	9.4	3.7	1.3	1.2	3.3	2.4	1.6	1.7	-	1.1	2	7	32	1 in	SFP	Wire	PDC	RG	2.5-1.3	12.9-7.0	4.4-2.3
SCP3-274LA0IEW	10.9	4.1	1.3	1.4	3.8	3.0	2.1	1.8	0.6	1.3	2	7	44	30 mm	SFP	Glass	Mil-dot	IE 36-Color	6.0-1.9	32.0-10.0	10.5-3.1



ELEVATION TRAVEL			WINDAGE TRAVEL	TRAVEL PER REVOLUTION	EYE RELIEF		EXIT PUPIL	DIOPTER	CLICK VALUE	PARALLAX		WEIGHT		SKU#
Total	Up	Down	Total		Inch	mm	mm			yds	m	oz	g	
														INTEGRIX®
100 MOA	60 MOA	40 MOA	50 MOA	50 MOA	3.74	95	10-3.5	-3D to +2D	1/2 MOA	100	91.4	25.3	716	IX801FA1
32.5 MRAD	19 MRAD	13.5 MRAD	10 MORAD	10 MRAD	3.74	95	10-3.5	-3D to +2D	0.1 MRAD	100	91.4	25.3	716	IX801FM3
100 MOA	60 MOA	40 MOA	50 MOA	50 MOA	3.74	95	10-3.5	-3D to +2D	1/2 MOA	100	91.4	25.3	716	IX801SA3
90 MOA	60 MOA	30 MOA	48 MOA	24 MOA	3.94	100	11-2.5	-3D to +2D	1/4 MOA	30-∞	27.4-∞	29.7	841	IX603FA2
32.5 MRAD	19 MRAD	13.5 MRAD	14 MRAD	10 MRAD	3.94	100	11-2.5	-3D to +2D	0.1 MRAD	30-∞	27.4-∞	29.7	841	IX603FM1
32.5 MRAD	19 MRAD	13.5 MRAD	14 MRAD	10 MRAD	3.94	100	11-2.1	-3D to +2D	0.1 MRAD	30-∞	27.4-∞	33.7	956	IX645FM1/M2
32.5 MRAD	19 MRAD	13.5 MRAD	14 MRAD	10 MRAD	3.54	90	9.2-1.6	-3D to +2D	0.1 MRAD	10-∞	10-∞	35.7	1011	IX606FM1/2
120 MOA	60 MOA	60 MOA	120 MOA	34 MOA	3.7	94	6.2	-3D to +2D	1/4 MOA	200	182.9	18.3	520	IXF45SA3/A4
														ACCUSHOT PRO™
100 MOA	60 MOA	40 MOA	40 MOA	40 MOA	3.54	90	9.5-4	-3D to +2D	1/2 MOA	100	91.4	22.6	642	AS601FA1
100 MOA	60 MOA	40 MOA	20 MOA	20 MOA	3.54	90	4-12	-3D to +2D	1/4 MOA	10-∞	9.14-∞	21.9	620	AS303FA2
100 MOA	60 MOA	40 MOA	20 MOA	20 MOA	3.43	87	10-3.5	-3D to +2D	1/4 MOA	10-∞	9.14-∞	24.7	701	AS403FA2
														UTG®
80 MOA	40 MOA	40 MOA	80 MOA	30 MOA	5-3.35	127-85	26.5-3.4	-2D to +2D	1/2 in	100	91.4	18.0	510	SCP3-18IEBG4
80 MOA	40 MOA	40 MOA	80 MOA	18 MOA	3.2-3.0	81-76	10.2-2.8	-2D to +2D	1/4 in	10-∞	9-∞	23.4	663	SCP3-U416A0IEW
80 MOA	40 MOA	40 MOA	80 MOA	18 MOA	3.4-3.0	86-76	13-3.9	-2D to +2D	1/4 in	10-∞	9-∞	23.2	658	SCP3-UM312A0IEW
80 MOA	40 MOA	40 MOA	80 MOA	18 MOA	3.4-3.0	86-76	11-2.8	-2D to +2D	1/4 in	10-∞	9-∞	21.8	618	SCP3-UM416A0IEW
80 MOA	40 MOA	40 MOA	80 MOA	26 MOA	4.0-3.5	102-90	14.7-4.5	-2D to +2D	1/4 MOA	10-∞	9-∞	20.7	587	OP3-GM3124UMOA
80 MOA	40 MOA	40 MOA	80 MOA	26 MOA	3.7-3.2	94-82	11-3	-2D to +2D	1/4 MOA	10-∞	9-∞	21.4	607	OP3-GM4164UMOA
80 MOA	40 MOA	40 MOA	80 MOA	24 MOA	4.3-3.3	109-84	10.6-2.7	-2D to +2D	1/3 MOA	3-∞	2.74-∞	12.7	360	SCP-M312A0D
80 MOA	40 MOA	40 MOA	80 MOA	24 MOA	4.3-3.3	109-84	10.6-2.7	-2D to +2D	1/3 MOA	3-∞	2.74-∞	12.7	360	SCP-M312A0WQ
80 MOA	40 MOA	40 MOA	80 MOA	18 MOA	4.2-3.2	107-81	10.6-3.6	-2D to +2D	1/4 MOA	3-∞	2.74-∞	14.0	397	SCP-M392A0LWQ
80 MOA	40 MOA	40 MOA	80 MOA	15 MOA	3.9-3.2	99-81	13-4.5	-2D to +2D	1/4 in	5-∞	4.57-∞	21.1	598	SCP-U394A0IEW
80 MOA	40 MOA	40 MOA	80 MOA	15 MOA	3.2-3.0	81-76	10-2.5	-2D to +2D	1/4 in	5-∞	4.57-∞	22.3	632	SCP-U4164A0IEW
80 MOA	40 MOA	40 MOA	80 MOA	20 MOA	3.40	86	8.0	-2D to +2D	1/4 in	35	32	14.4	408	SCP-U432FD
80 MOA	40 MOA	40 MOA	80 MOA	15 MOA	3.2-3.0	81-76	8.3-2.2	-2D to +2D	1/4 in	10-∞	9-∞	26.5	751	SCP-U6245A0IEW
80 MOA	40 MOA	40 MOA	80 MOA	36 MOA	5.8-4.3	147-108	24-6.2	-2D to +2D	1/2 MOA	10-∞	9-∞	16.0	454	OP3-G1563CRWQ
80 MOA	40 MOA	40 MOA	80 MOA	20 MOA	3.8"	97	8.0	-2D to +2D	1/4 in	50	45.7	12.3	349	SCP-M4CR5WQ
80 MOA	40 MOA	40 MOA	80 MOA	15 MOA	25.0-13.8	635-351	16-5.0	-2D to +2D	1/4 in	35	32	14.0	397	SCP-27PR6W
80 MOA	40 MOA	40 MOA	80 MOA	18 MOA	11.0-9.5	279-241	22.0-6.3	-2D to +2D	1/4 in	10-∞	9-∞	25.4	720	SCP3-274LA0IEW



# DOT SIGHTS & MAGNIFIERS

A person wearing a dark grey tactical shirt, a dark cap, and large tan ear protection with 'SORDIN' written on it is aiming a black handgun. They are wearing tan and black gloves. The background consists of a wall made of stacked black tires. The person's right arm is extended forward, holding the handgun steady.

## CONFIDENCE SQUARED AWAY

Follow through with confidence. UTG® offers a wide selection of MRDS (Micro Reflect Dot Sights) and closed-emitter dot sights to choose from. Mount the ACCU-SYNC® 2521R on your AR for training or a selection from our OP3 line for your next IDPA match. Acquire and transition between targets by fine-tuning your solution across different reticle options, adaptive bases, height profiles, and more.





## JUMP TO A SERIES

### UTG® ACCU-SYNC® DOT SIGHTS

066

DS2521R for Mini ACOG® Footprint

067

DS2018R for Mini ACOG® Footprint

067

### UTG® OP3 MICRO MRDS

068

Mini Micro MRDS for SHIELD RMSC Footprint

069

MRDS/SL/SLS for DOCTER® Footprint

069

MRDS/SLS for RMR® Footprint

069

### UTG® 3X FLIP-TO-SIDE MAGNIFIER

070

### UTG® ITA DOT SIGHTS

070

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)





ACCURACY SYNCHRONIZED  
**ACCU-SYNC**





# ACCU-SYNC® 2018R & 2521R DOT SIGHTS

WWW.LEAPERS.COM | SINCE 1992



**ACCU-SYNC® 2018R**  
Manual Brightness  
For Mini ACOG® Footprint / Red 3 MOA / 2.24" Length  
/ DP-DS2018R




**ACCU-SYNC® 2521R**  
Manual Brightness  
For Mini ACOG® Footprint / Red 3 MOA / 2.66" Length  
/ DP-DS2521R



Low Profile Quick Release (QR) for Mini ACOG® Mount with Lower 1/3 Co-witness Riser Included

## ACCU-SYNC® 2018R & 2521R DOT SIGHTS

- » 3 MOA Red Dot with 8 Brightness Settings
- » 30,000+ Hours Battery Life at Middle Brightness Setting
- » Snag-free Flush Turrets with Crisp 1 MOA Per Click Adjustment at 100 Yards
- » Wide Field of View Lens Diameter
- » Impact Resistant Tempered Glass Lens
- » Precision Machined from 6061-T6 Aluminum and Finished in a Matte Black Anodization
- » IPX7 Waterproof Rated

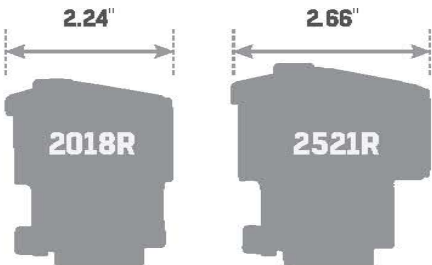

	DP-DS2018R	DP-DS2521R
Mount Footprint	For Mini ACOG®, with Lower 1/3 Co-witness Riser	
Lens Diameter	0.75" (19 mm)	0.79" (20 mm)
Length x Width	2.24" x 1.64"	2.66" x 1.66"
Reticle / Illumination	Red 3 MOA Dot	Red 3 MOA Dot
Illumination Mode	Manual, 8 Settings	Manual, 8 Settings
Adjustment	1 MOA Per Click	1 MOA Per Click
Material	Anodized AL6061	Anodized AL6061
Weight	5.4 oz (153 g)	6.1 oz (173 g)
Battery Life	30,000+ hrs	30,000+ hrs
Battery Type	CR2032 3V	CR2032 3V



# OP3 MICRO





# OP3 MICRO MRDS



## OP3 MINI MICRO

Constant-on Automatic Brightness

For SHIELD RMSC Footprint / **Red 3 MOA** / OT-RDM16R

Out-of-the-box Compatible with SIG P365X/XL, GLOCK 43X/48 MOS, WALTHER PPS M2 RMSC, SPRINGFIELD ARMORY HELLCAT OSP, RUGER MAX-9, S&W PERFORMANCE CENTER M&P SHIELD M2.0, and Most Other Optics-Ready Pistol Platforms



## OP3 MICRO

Manual Brightness

For DOCTER® Footprint / **Red 4 MOA** / OP-RDM20R

For DOCTER® Footprint / **Green 4 MOA** / OP-RDM20G

For RMR® Footprint / **Red 4 MOA** / OP-RMR20R



## OP3 MICRO SL

Manual Brightness / Side Loading Battery

For DOCTER® Footprint / **Red 4 MOA** / OP-RDM20CT

## OP3 MICRO SLS

Auto Sensing Brightness with Manual Override / Side Loading Battery



For DOCTER® Footprint / **Red 4 MOA** / OP-RDM20CTS

For RMR® Footprint / **Red 4 MOA** / OP-RMR20CTS

	OT-RDM16R	OP-RDM20R	OP-RDM20G	OP-RDM20CT	OP-RDM20CTS	OP-RMR20R	OP-RMR20CTS
Mount Footprint	For SHIELD RMSC	For DOCTER®	For DOCTER®	For DOCTER®	For DOCTER®	For RMR®	For RMR®
Lens Diameter	0.85" x 0.59"	0.89" x 0.68"	0.89" x 0.68"	0.89" x 0.68"	0.89" x 0.66"	0.89" x 0.68"	0.89" x 0.68"
Length x Width	1.60" x 0.95"	1.90" x 1.14"	1.90" x 1.14"	1.90" x 1.14"	1.90" x 1.14"	1.78" x 1.14"	1.78" x 1.14"
Reticle / Illumination	Red 3 MOA Dot	Red 4 MOA Dot	Green 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot
Illumination Mode	Automatic, Constant-on	Manual	Manual	Manual	Manual & Auto Sensing	Manual	Manual & Auto Sensing
Adjustment	N/A	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click
Co-witness	Lower 1/3 Co-witness with Most Standard Height Iron Sights	Co-witnesses with Most Suppressor Height Iron Sights					
Material	Matte Black Anodized 6061-T6 Aluminum Body, Glass Lens						
Weight	0.7 oz [20 g]	1.2 oz [34 g]	1.2 oz [34 g]	1.2 oz [34 g]	1.2 oz [34 g]	1.1 oz [31 g]	1.2 oz [34 g]
Battery Life	30,000+ hrs	55,000+ hrs	20,000+ hrs	15,000+ hrs	15,000+ hrs	55,000+ hrs	15,000+ hrs
Battery Type	CR2032 3V	CR2032 3V	CR2032 3V	CR1632 3V	CR1632 3V	CR2032 3V	CR1632 3V
Battery Loading	Bottom Loading	Bottom Loading	Bottom Loading	Side Loading	Side Loading	Bottom Loading	Side Loading





## ITA DOT SIGHTS & MAGNIFIER



### 3X QD FLIP-TO-SIDE MAGNIFIER

- » Windage/Elevation Adjustability for Optimum View Centering
- » 42 mm Center Height for Most Common Dot Sight Combination
- » Perfect Match with: SCP-DS3840W, SCP-DS3039W, SCP-DS3840TDQ
- » Match with 0.60" Riser: SCP-RD40RGW-A
- » Match with 0.75" Riser: SCP-RG40SDQ, SCP-RG40CDQ
- » US PAT. 8397421, US PAT. D672839, EU PAT. EP1984576-0001

Integral QD Mount / SCP-MF3WEQS



Bidirectional Offset Mount Included



### 6.0" ITA DOT SIGHT

- » Built on TRUE STRENGTH® Platform
- » Unlimited Eye Relief and Intuitive, Quick-to-acquire Red/Green T-dot Reticle for Swift Execution of T-Zone and Center Mass Hits
- » Premium Zero Lockable and Zero Resettable Target Turrets with Most Consistent, Precise and Reliable 1/2 MOA per Click Adjustment and Zero Hold Capability
- » 42mm Center Height for 1/3 Co-witness of Front and Rear Iron Sights
- » US PAT. 8397421

RG T-Dot / Bidirectional QD Mount / SCP-TDQDQ






Offset Riser Applications



## 4.2" ITA DOT SIGHTS

» US PAT. 8397421

RG 4 MOA Single Dot / Adjustable Riser / SCP-DS3840W  
RG T-Dot / Adjustable Riser / SCP-DS3840TDQ

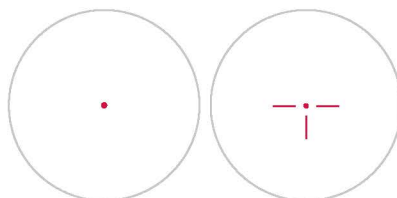


Offset Riser Applications



## 3.9" ITA DOT SIGHT

» US PAT. 8397421


RG 4 MOA Single Dot / Adjustable Riser / SCP-DS3039W



## 3.8" ITA DOT SIGHTS

» US PAT. 8397421


RG 4 MOA Single Dot / Integral Mount / SCP-RD40RGW-A  
RG Circle Dot / Integral QD Mount / SCP-RG40CDQ

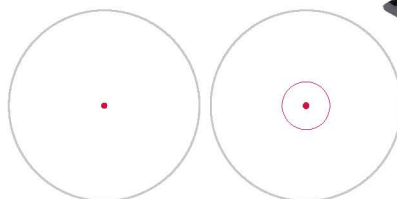

## 2.6" ITA DOT SIGHT

» US PAT. 8397421

RG 4 MOA Single Dot / Integral QD Mount / SCP-DS3026W



	SCP-MF3WEQS	SCP-TDQ	SCP-DS3840W	SCP-DS3840TDQ	SCP-DS3039W	SCP-RD40RGW-A	SCP-RG40CDQ	SCP-DS3026W
Reticle / Illumination	-	T-DOT / RG	Single Dot / RG	T-DOT / RG	Single Dot / RG	Single Dot / RG	Circle Dot / RG	Single Dot / RG
MOA	-	-	4 MOA	-	4 MOA	4 MOA	-	4 MOA
Magnification	3X	1X	1X	1X	1X	1X	1X	1X
Main Tube Diameter	44 mm	38 mm	38 mm	38 mm	30 mm	38 mm	38 mm	30 mm
Objective Diameter	25 mm	39 mm	32 mm	32 mm	26 mm	30 mm	30 mm	21 mm
FOV @ 100 Yards	45'	85'	103'	103'	75'	95'	95'	95'
Eye Relief	2"	Unlimited						
Exit Pupil	8.7 mm	Unlimited						
Click Value	-	1/2"						
Center Height	42 mm	42 mm	32 mm (42 mm w/riser)	32mm (42mm w/riser)	30 mm (40 mm w/riser)	25.5 mm	25.5 mm	25 mm
Length	4"	6"	4.2"	4.2"	3.9"	3.8"	3.8"	2.6"
Weight	11.8 oz (335 g)	13.1 oz (371 g)	8.7 oz (247 g)	8.7 oz (247 g)	8.3 oz (235 g)	9.4 oz (266 g)	8.4 oz (238 g)	4.9 oz (139 g)
Battery Type	-	CR1620 3V					CR2032 3V	



# OPTIC MOUNTS & RINGS



## WHAT IT TAKES TO STAY ZEROED

Staying zeroed. There is more to it than torquing down screws or throwing a lever to the side. Surface interfaces must adhere to strict tolerances, thread engagement must be precise. Mounts must be square and locking lugs must be able to return to zero and manage the recoil. From your traditional hunting rifle to your configuration for civilian defense, our solutions are reliable and durable when it counts.





## JUMP TO A SERIES

	<b>UTG PRO® P.O.I.® SCOPE RINGS [NEW]</b>	074
	<b>SCOPE RINGS &amp; MOUNTS</b>	076
	ACCU-SYNC® QR Cantilever Mounts w/ MOA Compensation [NEW]	076
	ACCU-SYNC® Cantilever Mounts	077
	ACCU-SYNC® QR Scope Rings	078
	UTG® Scope Rings & Mounts	079
	<b>UTG PRO®  CLAW MOUNT FOR MP5® &amp; MP5K [NEW]</b>	080
	<b>DRILLED &amp; TAPPED RECEIVER MOUNTS</b>	082
	<b>DOVETAIL-TO-PICATINNY MOUNTS</b>	083
	<b>AK RECEIVER MOUNTS</b>	084
	<b>M1A RECEIVER MOUNT</b>	085
	<b>SHOTGUN SIDE SADDLE MOUNTS</b>	086
	<b>SUPER SLIM PICATINNY RISER MOUNTS</b>	087
	<b>DEDICATED OPTIC MOUNTS</b>	088
	Picatinny Mounts for DOCTER® / RMR®	088
	Picatinny Mounts for AIMPOINT® Micro	088
	Dovetail Mounts for RMR®	089
	Dovetail Mounts for DOCTER®	089

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE  
TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]





# PRO® PRECISION OPTICS INTERFACE






# P.O.I.<sup>®</sup> SCOPE RINGS

**UTG PRO<sup>®</sup>**   
**P.O.I.<sup>®</sup> SCOPE RINGS**

- » Proudly Designed and Made in USA
- » Patented P.O.I.<sup>®</sup> Locking Plate Featuring Dual Spring-loaded Guide Rods
- » Picatinny Rings have Square Picatinny Recoil Stop and Dovetail Rings an Additional Threaded Recoil Stop-pin for Secure and Repeatable Zero Hold
- » Top and Bottom Rings Precision-machined from One Piece for Tight Tolerance Inner Diameter
- » Rated for .50 BMG

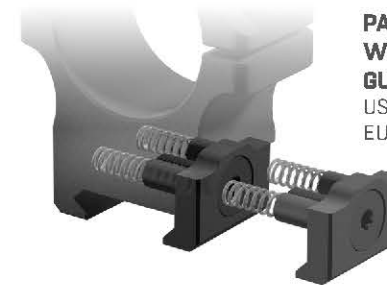

**PATENTED P.O.I LOCKING PLATE  
 WITH DUAL SPRING-LOADED  
 GUIDE RODS**  
 US PAT. D771218  
 EU PAT. 002761064-0001



## PICATINNY RINGS

<b>34 MM</b>	<b>30 MM</b>	<b>1 IN</b>
Low / RWU013408 <b>[NEW]</b>	Low / RWU013010	Low / RWU012510
Medium / RWU013415	Medium / RWU013015	Medium / RWU012515
High / RWU013420	High / RWU013022	High / RWU012520

## DOVETAIL RINGS

<b>30 MM</b>	<b>1 IN</b>
Low / RDU013010	Medium / RDU012515
Medium / RDU013015	High / RDU012520
High / RDU013022	

Picatinny	RWU013408	RWU013415	RWU013420	RWU013010	RWU013015	RWU013022	RWU012510	RWU012515	RWU012520
Dovetail	-	-	-	RDU013010	RDU013015	RDU013022	-	RDU012515	RDU012520
Ring Diameter	34 mm	34 mm	34 mm	30 mm	30 mm	30 mm	1"	1"	1"
Profile	Low	Medium	High	Low	Medium	High	Low	Medium	High
Center Height	25 mm	32 mm	37 mm	25 mm	30 mm	37 mm	23 mm	28 mm	33 mm
Saddle Height	8 mm	15 mm	20 mm	10 mm	15 mm	22 mm	10 mm	15 mm	20 mm
Max Fit. Obj. Bell Dia.	50 mm	63 mm	73 mm	49 mm	59 mm	73 mm	45 mm	55 mm	65 mm
Weight	4.5 oz	5.3 oz	5.4 oz	4.7 oz	5.2 oz	5.6 oz	4.4 oz	5.2 oz	5.6 oz





# ACCU-SYNC® CANTILEVER MOUNTS

## QR PICATINNY CANTILEVER MOUNTS W/ MOA COMPENSATION

- » ACCU-SYNC® MOA Compensation Mounts for Long Range Feature a 70 mm Offset and 20 MOA, 30 MOA, or 40 MOA Vertical Compensation
- » Vertical Compensation is Precision Machined and Tilts Front of the Optic Downwards to Increase Access to Elevation Adjustment Range
- » Quick Release (QR) Picatinny Mount with Tool-free Tension Adjustment
- » Integral Squared Recoil Stops for Secure and Repeatable Zero Hold
- » 6061-T6 Aluminum with Matte Black Anodize
- » Rated for .338 LAPUA Magnum



### 20 MOA

34 mm / AIR420MOA  
30 mm / AIR320MOA

### 30 MOA

34 mm / AIR430MOA  
30 mm / AIR330MOA

### 40 MOA

34 mm / AIR440MOA  
30 mm / AIR340MOA

QR Picatinny Cantilever Mount	AIR420MOA	AIR320MOA	AIR430MOA	AIR330MOA	AIR440MOA	AIR340MOA
MOA Compensation	20	20	30	30	40	40
Ring Diameter	34 mm	30 mm	34 mm	30 mm	34 mm	30 mm
Tilted Degree	0.33°	0.33°	0.50°	0.50°	0.67°	0.67°
Ring Distance (Inner)	60 mm	60 mm	60 mm	60 mm	60 mm	60 mm
Base Length	80 mm	80 mm	80 mm	80 mm	80 mm	80 mm
Offset Distance	70 mm	70 mm	70 mm	70 mm	70 mm	70 mm
Weight	6.0 oz	5.7 oz	6.0 oz	5.8 oz	6.0 oz	5.8 oz





## QR PICATINNY CANTILEVER MOUNT

**34 MM**  
X-HIGH / 70 MM OFFSET / AIR42270Q

**30 MM**  
HIGH / 34 MM OFFSET / AIR32234Q  
HIGH / 50 MM OFFSET / AIR32250Q

**1 IN**  
MEDIUM / 34 MM OFFSET / AIR11834Q  
MEDIUM / 50 MM OFFSET / AIR11850Q  
HIGH / 50 MM OFFSET / AIR11850Q




## PICATINNY CANTILEVER MOUNT

**34 MM**  
HIGH / 50 MM OFFSET / AIR42250

**30 MM**  
MEDIUM / 34 MM OFFSET / AIR31834  
MEDIUM / 50 MM OFFSET / AIR31850  
HIGH / 34 MM OFFSET / AIR32234  
HIGH / 50 MM OFFSET / AIR32250

**1 IN**  
MEDIUM / 34 MM OFFSET / AIR11834  
MEDIUM / 50 MM OFFSET / AIR11850  
HIGH / 34 MM OFFSET / AIR12234  
HIGH / 50 MM OFFSET / AIR12250

QR Picatinny Cantilever Mount	-	AIR42270Q	-	-	AIR32234Q	AIR32250Q	AIR11834Q	AIR11850Q	-	AIR12250Q
Picatinny Cantilever Mount	AIR42250	-	AIR31834	AIR31850	AIR32234	AIR32250	AIR11834	AIR11850	AIR12234	AIR12250
Ring Diameter	34 mm	34 mm	30 mm	30 mm	30 mm	30 mm	1"	1"	1"	1"
Profile	High	X-High	Medium	Medium	High	High	Medium	Medium	High	High
Center Height	39 mm	39 mm	33 mm	33 mm	37 mm	37 mm	31 mm	31 mm	35 mm	35 mm
Saddle Height	22 mm	22 mm	18 mm	18 mm	22 mm	22 mm	18 mm	18 mm	22 mm	22 mm
Max Fit. Obj. Bell Dia.	77 mm	78 mm	65 mm	65 mm	73 mm	73 mm	61 mm	61 mm	69 mm	69 mm
Ring Distance (Inner)	60 mm	60 mm	44 mm	60 mm	44 mm	60 mm	44 mm	60 mm	44 mm	60 mm
Base Length	100 mm	80 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Offset Distance	50 mm	70 mm	34 mm	50 mm	34 mm	50 mm	34 mm	50 mm	34 mm	50 mm
Weight (QR)	-	6.1 oz	-	-	5.9 oz	6.0 oz	5.4 oz	5.6 oz	-	5.7 oz
Weight (NON-QR)	5.8 oz	-	5.2 oz	5.5 oz	5.6 oz	5.7 oz	5.0 oz	5.2 oz	5.2 oz	5.4 oz

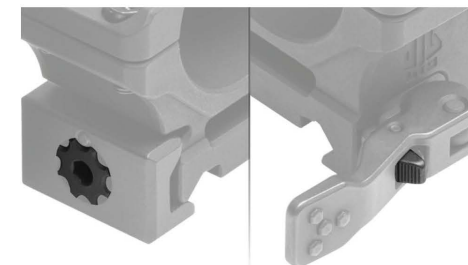

### TOOL-FREE & WIDE-RANGE TENSION ADJUSTMENT

Set Tension Once and Adjustment Stays Locked In, Accommodates Even Most Out-of-spec Picatinny Rails and Provides a Secure Repeatable Zero

## ADDITIONAL ACCESSORIES

### ACCU-SYNC® ANTI-CANT LEVELERS

- » Magnetic Flip-to-Side Anti-Cant Bubble Leveler Easily Seen Through Peripherals without having to Break Target Focus and or Adjust Cheek Weld
- » Durable Matte Black Anodized 6061-T6 Aluminum Construction
- » Compatible with UTG® ACCU-SYNC® Cantilever Mounts and Rings that Feature a Mechanical Offset
- » US PAT. 1129372



### ANTI-CANT LEVELERS

1 in / MT-RTR1  
30 mm / MT-RTR3  
34 mm / MT-RTR4

### ACCU-SYNC® ANTI-CANT LEVELERS WITH MRDS MOUNTS

- » Includes Cover Plate and Docter® and RMR® Footprint Compatible Optic Plates

1 inch / MT-RTF1  
30 mm / MT-RTF3  
34 mm / MT-RTF4







## ACCU-SYNC® QR SCOPE RINGS

- » Tool-free and Wide-Range Tension Adjustment
- » Accommodates Even Most Out-of-spec Picatinny Rails
- » Locking Quick Release Throw Levers Prevent Inadvertent Release
- » Squared Recoil Stops Prevent Forward and Rearward Movement under Recoil
- » Snag-free Radiused Edges and Corners and Melted Contours
- » Lightweight Skeletonized Matte Black Anodized Aluminum Construction
- » Rated for .338 LAPUA Magnum



**PICATINNY W/LOCKING QR LEVER**

34 MM

Medium / AQR415  
High / AQR420  
X-high / AQR422  
2X-high / AQR432

30 MM

Low / AQR310  
Medium / AQR315  
High / AQR322

1 IN

Low / AQR110  
Medium / AQR115  
High / AQR120

<i>Picatinny/QR Lever</i>	<b>AQR415</b>	<b>AQR420</b>	<b>AQR422</b>	<b>AQR432</b>	<b>AQR310</b>	<b>AQR315</b>	<b>AQR322</b>	<b>AQR110</b>	<b>AQR115</b>	<b>AQR120</b>
<i>Ring Diameter</i>	34 mm	34 mm	34 mm	34 mm	30 mm	30 mm	30 mm	1"	1"	1"
<i>Profile</i>	Medium	High	X-High	2X-High	Low	Medium	High	Low	Medium	High
<i>Center Height</i>	32 mm	37 mm	39 mm	49 mm	25 mm	30 mm	37 mm	22.7 mm	27.7 mm	32.7 mm
<i>Saddle Height</i>	15 mm	20 mm	22 mm	32 mm	10 mm	15 mm	22 mm	10 mm	15 mm	20 mm
<i>Max Fit. Obj. Bell Dia.</i>	64 mm	74 mm	98 mm	98 mm	50 mm	60 mm	74 mm	45.4 mm	55.4 mm	65.4 mm
<i>Weight</i>	4.4 oz	4.8 oz	4.8 oz	5.4 oz	3.6 oz	4.1 oz	4.5 oz	3.7 oz	4.0 oz	4.3 oz



# UTG® SCOPE RINGS & MOUNTS



## PICATINNY WITH TWIST LOCK

**30 MM**

Low / RG2W3104  
Medium / RG2W3154  
High / RG2W3224

**1 IN**

Low / RG2W1104  
Medium / RG2W1154  
High / RG2W1204



## DOVETAIL INTEGRAL MOUNT

**30 MM**

Medium / RGPM2PA-30M4

**1 IN**

Medium / RGPM2PA-25M4  
High / RGPM2PA-25H4



## PICATINNY WITH HEX THUMB NUT

**30 MM**

Low / RGWM-30L4  
Medium / RGWM-30M4  
High / RGWM-30H4

**1 IN**

Low / RGWM-25L2  
Medium / RGWM-25M4  
High / RGWM-25H4



## DOVETAIL OFFSET INTEGRAL MOUNT

**1 IN**

High / RGPMOFS38-25H4



## DOVETAIL WITH 4 MM HEX

**30 MM**

Medium / RGPM-30M4  
High / RGPM-30H4

**1 IN**

Medium / RGPM-25M4  
High / RGPM-25H4

	RGPM2PA-30M4	RGPM2PA-25M4	RGPM2PA-25H4	RGPMOFS38-25H4
Ring Diameter	30 mm	1"	1"	1"
Profile	Medium	Medium	High	High
Center Height	29 mm	27 mm	34 mm	34 mm
Saddle Height	14 mm	14 mm	21 mm	21 mm
Max. Scope Outer Dia.	57 mm	53 mm	67 mm	67 mm
Ring Distance (Inner)	58 mm	58 mm	58 mm	39 mm
Base Length	100 mm	100 mm	100 mm	62 mm
Offset Distance	-	-	-	38 mm

Picatinny/Twist Lock	RG2W3104	-	RG2W3154	-	RG2W3224	-	-	RG2W1104	RG2W1154	-	-	RG2W1204	-
Picatinny/Hex Thumb Nut	-	RGWM-30L4	-	RGWM-30M4	-	RGWM-30H4	-	RGWM-25L2	-	RGWM-25M4	RGWM-25H4	-	-
Dovetail/Hex	-	-	-	RGPM-30M4	-	-	RGPM-30H4	-	-	RGPM-25M4	-	-	RGPM-25H4
Ring Diameter	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	1"	1"	1"	1"	1"	1"
Profile	Low	Low	Medium	Medium	High	High	High	Low	Medium	Medium	High	High	High
Center Height	25 mm	24 mm	30 mm	29 mm	37 mm	37 mm	36 mm	23 mm	28 mm	27 mm	31 mm	33 mm	34 mm
Saddle Height	10 mm	9 mm	15 mm	14 mm	22 mm	22 mm	21 mm	10 mm	15 mm	14 mm	18 mm	20 mm	21 mm
Max Fit. Obj. Bell Dia.	49 mm	47 mm	59 mm	57 mm	73 mm	73 mm	71 mm	45 mm	55 mm	53 mm	61 mm	65 mm	67 mm







# UTG PRO<sup>®</sup> CLAW MOUNT FOR MP5<sup>®</sup> / MP5K

**UTG PRO<sup>®</sup>**  **NEW**

- » Proudly Designed and Made in USA
- » Low Profile and Extended Picatinny Rail for Ample Optics Real Estate with Machined Cutout for Serial Number Identification
- » User-friendly Receiver Locking Interface
- » Lightweight Matte Black Anodized Aluminum Construction
- » Compatible with MP5<sup>®</sup> and MP5K Pattern Pistols and Rifles



	<b>MTU056</b>
<i>Platform</i>	for MP5 <sup>®</sup> & MP5K
<i>Length</i>	5.43" (138 mm)
<i>Width x Height</i>	1.63" x 1.2" (41 x 30 mm)
<i>Weight</i>	2 oz (57 g)
<i>Picatinny Slots</i>	13



WWW.LEAPER.COM  
SINCE 1992



User-friendly Receiver Locking Interface



Extended Picatinny Flat-top with Cutout for Serial Number

## MORE FOR YOUR MP5<sup>®</sup> & MP5K

**UTG PRO<sup>®</sup>**   
**MONOLITHIC HANDGUARDS FOR MP5<sup>®</sup> & MP5K**  
(Refer to pg. 108 - 109 for Detailed Info.)

- » Monolithic Design Combines M-LOK<sup>®</sup> and Optics Real Estate into One Rigid Mount
- » Extended Picatinny Flattop with Cutout for Serial Number Identification
- » Chamfered Locking Recess Notch Prevents Hot Spots and Snag Points while Manipulating Charging Handle

**FOR MP5<sup>®</sup> EXTENDED / MTU055SSME**  
**FOR MP5<sup>®</sup> / MTU055SSM**  
**FOR MP5K / MTU055SMK**



**UTG PRO<sup>®</sup>**   
**M-LOK<sup>®</sup> LIGHT MOUNTS FOR MP5<sup>®</sup>**  
(Refer to pg. 160 - 161 for Detailed Info.)

- » Securely Attaches to Front Sight, Does Not Interfere with Handguards or Forearms
- » M-LOK<sup>®</sup> Slots at the 11, 12, and 1 O'clock for Mounting Lights, Pressure Switches, and Other Accessories

**/ MTU058SSM**







## DRILLED & TAPPED RECEIVER MOUNTS



### UTG PRO® FOR RUGER® 10/22®

- » Compatible with RUGER® 10/22® with Drilled and Tapped Receiver
  - » 4.67" Length with 11 Picatinny Slots
  - » Laser Engraved T-marked Positional Indicators
  - » Matte Black Hard Coat Anodized 6061-T6 Aluminum Construction
  - » User-friendly Installation, No Permanent Modification Required
- / MTU030T22



### UTG PRO® FOR MOSSBERG® 500® & 590®

- » Compatible with MOSSBERG® 500® & 590® Shotguns with Drilled and Tapped Receiver
  - » 5.5" Overall Length with 13 Picatinny Slots
  - » Laser Engraved T-marked Positional Indicators
  - » U-Cut Sight Channel for Access to Front Sight Bead
  - » Matte Black Hard Coat Anodized 6061-T6 Aluminum Construction
  - » User-Friendly Installation, No Permanent Modification Required
- / MTU029SG



### UTG PRO® FOR REMINGTON® 870™ / 1100™

- » Compatible with REMINGTON® 870™ & 1100™ Shotguns with Drilled and Tapped Receiver
  - » 6.1" Overall Length with 14 Picatinny Slots
  - » Laser Engraved T-marked Positional Indicators
  - » U-Cut Sight Channel for Access to Front Sight Bead
  - » Matte Black Hard Coat Anodized 6061-T6 Aluminum Construction
  - » User-Friendly Installation, No Permanent Modification Required
- / MTU028SG



### FOR REMINGTON® 700®

- » Clearance Cut for Reliable Case Ejection
  - » 6-slot MIL-STD-1913 Picatinny Top Rail
  - » Solid Steel Construction
- For REMINGTON® 700® Long Action Rifles / MNT-RM700  
For REMINGTON® 700® Short Action Rifles / MNT-RM700S





## DOVETAIL TO PICATINNY MOUNTS



### DOVETAIL TO PICATINNY UNIVERSAL ADAPTOR

- » Compatible with 9 mm - 11 mm Flat or Rounded Dovetail Rails
- » 5.7" Length with 14 Picatinny Slots, 0.59" Saddle Height, and 51.8 mm Cantilevered Offset
- » Features Optional Threaded Recoil Stop Pins for Added Zero Retention
- » Matte Black Anodized 6061-T6 Aluminum Construction
- » US PAT. 10352656, EU PAT. EP3196588

/ MNT-DTW145



### DOVETAIL TO PICATINNY ADAPTOR MOUNT

- » Compatible with Flat Receivers Equipped with 9 mm - 11 mm Dovetail Rails
- » 3.94" Scalloped 9 Picatinny Slots with 0.59" Saddle Height
- » Matte Black Anodized 6061-T6 Aluminum Construction
- » US PAT. D837330

/ MNT-PMTOWL-A



### DOVETAIL-TO-PICATINNY SNAP-ON RAIL ADAPTOR

- » Adapts Most Picatinny Rings and Mounts to Flat Dovetail Rail Interface
- » Spring-loaded Adjustable Dovetail Width from 9 mm - 11 mm
- » Removable and Threaded Vertical Stop Pin Provides Added Retention for Dovetail Rails Equipped with Stop Pin Holes
- » Lightweight Aluminum and Steel Construction
- » US PAT. 8752325

Set of 2 / MNT-DT2PW01





## AK RECEIVER MOUNTS



### ACCU-SYNC® QR AK SIDE MOUNT

- » Matte Black Anodized Steel-reinforced 6061-T6 Aluminum Construction
- » Tool-free, Tension-adjustable Quick Release (QR) Lever Mount Compatible with Most Standard Receiver Side Rails
- » Universal 16-slot Picatinny Top Rail, Centering with Receiver May Vary Depending on Rifle Make and Model and Manufacturer Tolerances
- » Overall Lightweight Design Features 2 Side M-LOK® Slots for Attaching Accessories
- » US PAT. D949276, US PAT. D949277

/ MT-UAK01



### AK QD SIDE MOUNT FOR ZASTAVA M70 N-PAP

- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Scalloped 15 Slot Picatinny Rail Features a Deep U-cut Channel for Accessing Iron Sights
- » Overall Lightweight Design Features 2 Side M-LOK® Slots for Attaching Accessories
- » Adjustable Quick Detach Lever Mount
- » US PAT. D949276, US PAT. D949277

/ MT-ZAK01





## UTG PRO

### AK QD SIDE MOUNT

- » Proudly Designed and Made in USA
- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Lightweight Design with Deep U-Cut Channel for Accessing Iron Sights
- » 16 Slot Picatinny Top Rail with Detachable 6 Slot Side Rail
- » Adjustable Quick Detach Lever Mount

/ MTU016



### AK STEEL SIDE PLATE

- » Durable Steel Construction with a Matte Black Finish
- » Fits Both Milled and Stamped AK Receivers and Accepts a Wide Variety of Side Optic Mounts
- » Permanent Modification Required

/ TL-M47SR

## M1A RECEIVER MOUNT



### OPTIC MOUNT FOR M14/M1A

- » Full-length 15 Slot Scalloped Picatinny Top Rail
- » Iron Sight Accessible Channel
- » Secure Zero Retention through 4 Points of Contact with Receiver
- » Matte Black Anodized Aluminum Construction
- » No Permanent Modification Required

/ MNT-914V2





## SHOTGUN SIDE SADDLE MOUNTS



### FOR MOSSBERG® 500® / 590® / 590M®

- » Durable 6061-T6 Aluminum Construction Finished in a Matte Black Anodization
- » Removable 4-Capacity Shot Shell Carrier Included
- » MT-MB590: Compatible with 12 Gauge MOSSBERG® 500®/590® Shotguns
- » MT-MB590M: Compatible with 12 Gauge MOSSBERG® 590M® Mag-Fed Shotguns

For MOSSBERG® 500® / 590® / MT-MB590  
For MOSSBERG® 590M® / MT-MB590M



### FOR REMINGTON® 870™

- » Durable 6061-T6 Aluminum Construction Finished in a Matte Black Anodization
- » Removable 4-Capacity Shot Shell Carrier Included
- » Compatible with 12 Gauge REMINGTON® 870™ and 870 DM Shotguns with up to a 3.5" Chambering

/ MT-RM870





## SUPER SLIM PICATINNY RISER MOUNTS



**PICATINNY RISER MOUNTS**

### 3-SLOT


0.50" Saddle Height / MT-RSX5S  
0.75" Saddle Height / MT-RSX7S  
0.83" Saddle Height / MT-RSX8S  
1.00" Saddle Height / MT-RSX1S

### 13-SLOT

0.50" Saddle Height / MT-RSX5L  
0.75" Saddle Height / MT-RSX7L  
0.83" Saddle Height / MT-RSX8L  
1.00" Saddle Height / MT-RSX1L



**20 MOA COMPENSATION PICATINNY RISER MOUNT**

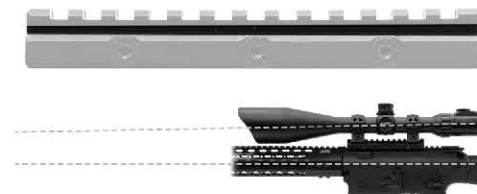

**13-SLOT  
MT-RSX20MOA**

## SUPER SLIM PICATINNY RISER MOUNTS

- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Lightweight and Low Profile with Dehorned Corners and Melted Contours
- » Laser Engraved T-marked MIL-STD-1913 Picatinny Rail
- » Squared Recoil Stops for a Secure and Repeatable Zero Hold
- » Lightening Cuts Reduce Overall Weight and Bulk (Medium and High Profile Only)

	MT-RSX5S	MT-RSX7S	MT-RSX8S	MT-RSX1S	MT-RSX5L	MT-RSX7L	MT-RSX8L	MT-RSX1L	MT-RSX20MOA
<i>Length</i>	1.6"	1.6"	1.6"	1.6"	5.5"	5.5"	5.5"	5.5"	5.5"
<i>Picatinny Slots</i>	3	3	3	3	13	13	13	13	13
<i>Saddle Height</i>	0.50"	0.75"	0.83"	1.00"	0.50"	0.75"	0.83"	1.00"	0.52"/0.55"
<i>Weight</i>	0.9 oz	0.9 oz	1.0 oz	1.0 oz	2.7 oz	2.7 oz	2.8 oz	2.8 oz	2.7 oz
<i>US PAT.</i>	0784482	0784483	-	0784481	0784482	0784483	-	0784481	-





## DEDICATED PICATINNY OPTIC MOUNTS

### FOR DOCTER® / RMR®



#### 45 DEGREE

For DOCTER® Footprint / RDM-2045  
For RMR® Footprint / MT-RMR45



#### LOW PROFILE

For RMR® Footprint / MT-RMRXS



#### ABSOLUTE CO-WITNESS

For DOCTER® Footprint / RDM-20AC  
For RMR® Footprint / MT-RMRAC



#### LOWER 1/3 CO-WITNESS

For RMR® Footprint / MT-RMR13C



### FOR AIMPOINT® MICRO

#### LOWER 1/3 & ABSOLUTE CO-WITNESS

Lower 1/3 Co-Witness / MT-T113C  
Absolute Co-Witness / MT-T1AC

	RDM-2045	RDM-20AC	MT-RMR45	MT-RMR13C	MT-RMRKIT		MT-T1AC	MT-T113C
					MT-RMRAC	MT-RMRXS		
<i>Footprint</i>	For DOCTER®	For DOCTER®	For TRIJICON RMR®	For TRIJICON RMR®	For TRIJICON RMR®	For TRIJICON RMR®	For AIMPOINT® Micro	For AIMPOINT® Micro
<i>Mount Type</i>	45 Degree	Absolute Co-witness	45 Degree	Lower 1/3 Co-witness	Absolute Co-witness	Low Profile	Absolute Co-witness	Lower 1/3 Co-witness
<i>Saddle Height</i>	N/A	0.78"	N/A	0.95"	0.87"	0.40"	0.78"	1.04"
<i>Length / Width</i>	1.8" / 2.5"	1.8" / 1.1"	1.8" / 2.5"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"	1.9" / 1.2"	1.9" / 1.2"
<i>Weight</i>	1.5 oz	1.5 oz	1.4 oz	1.6 oz	1.5 oz	1.4 oz	1.2 oz	1.3 oz





# DEDICATED DOVETAIL OPTIC MOUNTS

## FOR RMR®



**REAR SIGHT DOVETAIL**  
For GLOCK® Dovetail / MT-RMRGL

## FOR DOCTER®



**REAR SIGHT DOVETAIL**  
For GLOCK® Dovetail / RDM-20GL  
For Sig P-Series Dovetail / RDM-20SIG  
For S&W M&P® Dovetail / RDM-20SW



**LOW PROFILE**  
0.33" Saddle Height / RDM-20XSD

	MT-RMRGL	RDM-20GL	RDM-20SIG	RDM-20SW	RDM-20XSD
Footprint	For TRIJICON RMR®	For DOCTER®	For DOCTER®	For DOCTER®	For DOCTER®
Mount Type	For GLOCK® Dovetail	For GLOCK® Dovetail	For SIG P-Series Dovetail	For S&W M&P® Dovetail	9 mm - 11 mm Flat or Round Dovetail
Saddle Height	0.16"	0.15"	0.16"	0.16"	0.3"
Length / Width	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"	1.8" / 1.1"
Weight	0.4 oz	0.5 oz	0.5 oz	0.5 oz	21.3 oz

## OP3 MICRO MRDS

(Refer to pg. 068 - 069 for Detailed Info.)



**OP3 MICRO SL**  
Side Loading Battery / Manual Brightness  
For DOCTER® Footprint / **Red** 4 MOA / OP-RDM20CT

**OP3 MICRO SLS**  
Side Loading Battery / Auto Sensing Brightness with Manual Override  
For DOCTER® Footprint / **Red** 4 MOA / OP-RDM20CTS  
For RMR® Footprint / **Red** 4 MOA / OP-RMR20CTS

**OP3 MICRO**  
Manual Brightness  
For DOCTER® Footprint / **Red** 4 MOA / OP-RDM20R  
For DOCTER® Footprint / **Green** 4 MOA / OP-RDM20G  
For RMR® Footprint / **Red** 4 MOA / OP-RMR20R



# IRON SIGHTS



## TRIED AND TRUE

Irons still have their place. Primary and even secondary optics aside, iron sights remain an effective means of getting shots on target despite the range of newer technology today. Pair our UTG® or UTG PRO® iron sights with our extensive selection of optic mounts, risers, and dot sights. Your backup has arrived.





## JUMP TO A SERIES

**UTG PRO®  FLIP-UP SIGHTS  
& CARRY HANDLE**

092

**FLIP-UP SIGHTS**

094

Ultra Slim Sights **[NEW]**

Super Slim Sights

ACCU-SYNC® Spring-Loaded Sights

ACCU-SYNC® 45° Sights

**FIXED SIGHTS**

096

**CARRY HANDLE**

096

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE  
TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]







 **UTG<sup>®</sup>**  
**PRO**



# UTG PRO® FLIP-UP SIGHTS & CARRY HANDLE



## UTG PRO® FLIP-UP SIGHTS

- » Proudly Designed and Made in USA
- » CNC Machined 6061-T6 Aluminum and Steel Construction Finished in Matte Black Anodize
- » Manual Flip-up Sight Tower Locks into Place when Deployed, Unlocks via Spring-loaded Push Button
- » Low Profile Locking Bolt and Mounting Deck Securely Attaches to any Picatinny Rail



FRONT / TLUFSS5  
REAR / TLURS55

	TLUFSS5	TLURS55	TLURS001
Position	Front	Rear	Rear
Adjustment	Standard A2 FSP	Tool-free Dual Aperture	A2 Dual Aperture with 6/3 Drum
Flip-up Type	Manual / Lockable		Fixed
Material	6061-T6 Aluminum, Steel		Forged 7075-T6 Aluminum, Steel
Stowed Height	0.5" (13 mm)	0.55" (14 mm)	1.8" (46 mm)
Weight	1.3 oz (37 g)	1.5 oz (43 g)	9.2 oz (261 g)

## UTG PRO® FORGED 7075-T6 ALUMINUM MIL-SPEC FORGED CARRY HANDLE

- » Proudly Designed and Made in USA
- » MIL-STD-1913 Picatinny Compatible Carry Handle with Dual Aperture A2 Rear Sight Assembly
- » Positive and Reliable Windage and Elevation Adjustment
- » Forged 7075-T6 Aluminum Construction Finished in Matte Black Hard Coat Anodize
- » Compatible with Triangular F-marked Front Sight Base and Mil-spec Height Backup Iron Sights

/ TLURS001



6/3 Windage Drum



A2 Dual Aperture







# AR FLIP-UP SIGHTS



## ULTRA SLIM SIGHTS NEW

- » Lightweight and Low Profile with 0.37" Stowed Height
- » Tool-free Elevation Adjustable Dual Width Sight Post (Front Sight)
- » Tool-free Windage Adjustable Same-plane Dual Aperture Sight, Serrated for Glare Reduction (Rear Sight)
- » Manual Folding Sight Tower Locks in the Upright Position
- » Picatinny Base Features Integral Squared Recoil Lug for Reliable Zero Retention and Return to Zero
- » Matte Black Anodized Aluminum and Steel Construction



**FRONT / MT-759**  
**REAR / MT-959**

## SUPER SLIM SIGHTS

- » Posi-lock Retention Plunger Locks Sight in Deployed Position
- » Low Profile 3 mm Locking Bolt and Mounting Deck Securely Attaches to any Picatinny Rail

**FRONT / MNT-755**  
**REAR / MNT-955**



## ACCU-SYNC® SPRING-LOADED SIGHTS

- » Posi-lock Push Button Automatically Deploys the Spring-loaded Sight and Prevents Sight from Collapsing when Deployed
- » Utilizes a Single Locking Torx Screw and Squared Recoil Stops for a Secure Zero Hold and Return to Zero on Picatinny Rails
- » Fold Over Design Uses Minimal Rail Space with Low Profile Stowed Height

**FRONT / MNT-757** (US PAT. 10119784, US PAT. D863490)  
**REAR / MNT-957** (US PAT. 10119784, US PAT. D863489)



## ACCU-SYNC® 45° SIGHTS

- » 45° Angled Offset Allows Access to Iron Sights Simultaneously with Magnified Optics
- » Posi-lock Retention Plunger Locks Sight in Deployed Position
- » Utilizes a Single Locking Torx Screw and Squared Recoil Stops for a Secure Zero Hold and Return to Zero on Picatinny Rails

**FRONT / MT-745** (US PAT. 10030935, US PAT. D851203)  
**REAR / MT-945** (US PAT. 10030935, US PAT. D852920)



	MT-759	MT-959	MT-745	MT-945	MNT-755	MNT-955	MNT-757	MNT-957
<b>Position</b>	Front	Rear	Front	Rear	Front	Rear	Front	Rear
<b>Adjustment</b>	Tool-free Adjustment Wheel	Tool-free Dual Aperture	Tool-free Adjustment Wheel	Tool-free Dual Aperture	Standard A2 FSP	Tool-free Dual Aperture	Standard A2 FSP	Tool-free Dual Aperture
<b>Flip-up Type</b>	Manual / Lockable		Manual / Lockable		Manual / Lockable		Spring Loaded / Lockable	
<b>Material</b>	6061-T6 Aluminum, Steel		6061-T6 Aluminum, Steel		6061-T6 Aluminum, Steel		6061-T6 Aluminum, Steel	
<b>Stowed Height</b>	0.60" (15 mm)	0.60" (15 mm)	-	-	0.55" (14 mm)	0.55" (14 mm)	0.63" (16 mm)	0.63" (16 mm)
<b>Weight</b>	0.7 oz (20 g)	0.7 oz (20 g)	1.1 oz (31 g)	1.3 oz (37 g)	1.3 oz (37 g)	1.52 oz (43 g)	1.2 oz (34 g)	1.4 oz (40 g)







# FIXED SIGHTS



## SUPER SLIM FIXED FRONT SIGHT

- » Low Profile Front Sight with Adjustable A2 Front Sight Post, Fits on Picatinny Handguard or High Profile Gas Block Levelled with Flat Top Upper Receiver
- » Utilizes a Locking Torx Screw Side Plate and Squared Recoil Stop to Ensure a Secure Zero Hold and Return to Zero on MIL-STD-1913 Picatinny Rails
- » CNC Machined 6061-T6 Aircraft Aluminum and Steel Construction with a Matte Black Finish

**Low Profile / MT-754X**  
**High Profile / MT-750X**



## SUPER SLIM FIXED REAR SIGHT

- » CNC Machined 6061-T6 Aircraft Aluminum Base with Steel A2 Sight Assembly
- » Slim and Lightweight Profile with a Durable Wear Resistant Matte Black Finish
- » Tool-free Windage and Elevation Adjustment with Dual Apertures Ideal for a Variety of Different Scenarios
- » Designed to Allow Adjustments of Vertical Canting Angle to Compensate the Necessary Bullet Drop for .223 Rem Ballistic Characteristics
- » Utilizes a Single Locking Torx Screw and Square-shaped Integral Recoil Stop for a Secure Zero Hold and Return to Zero on MIL-STD-1913 Picatinny Rails

**/ MT-950RS03**

	MT-754X	MT-750X	MT-950RS03	MT-950X
<i>Position</i>	Front	Front	Rear	Rear
<i>Adjustment</i>	Standard A2 FSP	Standard A2 FSP	A2 Dual Aperture with 6/3 Drum	A2 Dual Aperture with 6/3 Drum
<i>Flip-up Type</i>	Fixed	Fixed	Fixed	Fixed
<i>Material</i>	6061-T6 Aluminum, Steel	6061-T6 Aluminum, Steel	6061-T6 Aluminum, Steel	6061-T6 Aluminum, Steel
<i>Height</i>	1.73" (44 mm)	1.87" (47 mm)	1.70" (43 mm)	1.9" (48 mm)
<i>Weight</i>	1.1 oz (31 g)	1.2 oz (34 g)	3.5 oz (99 g)	7.4 oz (210 g)

# CARRY HANDLE



## ENHANCED CARRY HANDLE REAR SIGHT

- » Matte Black Anodized CNC Machined 6061-T6 Aluminum and Steel Construction
- » Staked and Knurled Thumb Wheels Can Be Tightened by Hand in the Field or by a Flathead Screw Driver or M6 Hex Wrench (Recommended Torque Value: 25 in-lbs)
- » A2 Dual Aperture and 6/3 Windage Drum
- » MIL-STD-1913 Picatinny Compatible Squared Recoil Lugs for a Secure Zero Hold and Return to Zero
- » Compatible with In-line Rail Mounted Front Sights and Taller F-marked Front Sight Bases

**/ MT-950X**

## ADDITIONAL ACCESSORIES

### AR15 4&5 PRONG A1/A2 DUAL FRONT SIGHT TOOL

- » Optimal Length and Slimmer Ergonomic Design for Ease of Use
- » One Piece Precision Machined Steel Part
- » Adjust Elevation of either 4-Prong or 5-Prong A1/A2 Front Sight Post
- » Patterned Surface for Easy Grip

**/ SCP-A1245-A**





# RECEIVERS

A woman with dark hair, wearing clear safety glasses and a black shirt, is shown in profile aiming a black rifle. The rifle is equipped with a large scope that has 'INTEGRITY' and 'UTG PRO' markings. The woman's hands are wearing black gloves. The background is slightly blurred, showing what appears to be the side of a white vehicle.

## MICHIGAN MADE. UNCOMPROMISING STANDARDS

Michigan made and designed from the ground up to provide shooters with functionality that benefits their skill set. UTG PRO® billet 7075-T6 receivers drill down to the very last detail with shooter-focused ergonomics, rigid reliability, common parts compatibility, and a lightweight overall design. Perfect for the basis of your next build.





## JUMP TO A SERIES

### UTG PRO® AR15 AMBI BILLET RECEIVERS 102

AR15 Billet Upper Receiver

AR15 Ambi Billet Lower Receiver

AR15 Ambi Billet Receiver Set

### UTG PRO® AR15 BILLET RECEIVERS 104

AR15 Billet Upper Receiver

AR15 Billet Lower Receiver

AR15 Billet Receiver Set

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]







## READY TO TRAIN. TRULY AMBI.

What does a standard forged mil-spec AR do well and is there room for true improvement when functionality, ergonomics, and cosmetics come into play? UTG PRO® AR receivers, designed and influenced by the professional, competition, and rightfist civilian alike. Shooter-focused ergonomics, rigid reliability, common parts compatibility, and lightweight overall design. Proudly designed and made in Michigan.

### MIRRORED BATTERY OF ARMS

Truly ambidextrous with left and right side bolt catch, bolt release, and magazine release. All controls located exactly where expected. All controls manipulate similarly as expected. Enhancements not just for a dominant right- or left-handed shooter, but for any shooter having to shoot either hand based on what their environment and situation demands.

### ENHANCED ERGONOMICS

Flared magwell to facilitate faster and smoother reloads. Firmly planted trigger finger indexing points for small, medium, and large hands. Overall melted receiver geometry reduces snag points and hot spots. Integral oversized trigger guard for gloved use.





## EASE OF INSTALLATION

Captured buffer detent and rear takedown pin detent prevent loss or damage when removing receiver end plate and buffer tube. Threaded steel pins in place of typical roll pins for easier assembly. Optional upper to lower receiver tensioning screw included.



# TRUE AIM



## MACHINED TO LAST

Precision machined at UTG PRO® in Michigan USA on Mazak HCN4000 4-axis horizontal milling machines. 60 cutting tools, 135 checked dimensions, & 5 lbs of billet stock cut to 0.5 lbs. Durable 7075-T6 billet Aluminum finished in Matte Black Hardcoat Anodize.



## DELIBERATE CONSTRUCTION

Tight tolerance fit of upper and lower receiver, takedown and pivot pins, and barrel extension. One additional Picatinny slot over the standard upper receiver flat top. Upper receiver features an optimal 90-degree brass deflector and is cut for M4 feed ramps.





TRUE  
AMBI

 **UTG<sup>®</sup>**  
**PRO**



# AR15 AMBI BILLET RECEIVERS



**UTG PRO** 

## AR15 AMBI BILLET RECEIVERS

- » Proudly Designed and Made in USA
- » True Ambidextrous Lower with Left and Right Side Magazine Release and Bolt Hold-open and Release
- » Matte Black Type III Class II Hard Coat Anodized 7075-T6 Billet Construction
- » Glove-friendly Oversized Trigger Guard
- » Fenced-in Magazine Releases and Ambidextrous Trigger Finger Indexing Points
- » Shortened and Flared Magwell Fully Compatible with Most Magazines and Drums
- » Threaded Steel Retention Pins and Set Screws, Zero Roll Pins Used in Assembly
- » Optional Receiver Tensioning Screw Included
- » Compatible with Most Furniture, Fire Control Groups, Bolt Carrier Groups, and Parts Kits
- » Captured Buffer and Rear Takedown Pin Detent and Spring
- » Tight Tolerance Fit of Upper and Lower Receiver, Takedown and Pivot Pins, and Barrel Extension
- » Upper Receiver Cut for M4 Feed Ramps
- » Upper Receiver Flat Top Features an Additional Picatinny Slot
- » Multi-caliber Marked

**AR15 BILLET UPPER RECEIVER / FUR001**

**AR15 AMBI BILLET LOWER RECEIVER / FLR002**

**AR15 AMBI BILLET RECEIVER SET / FCR02**



True Ambi Lower with Right Side Bolt Hold Open and Release



Threaded Steel Retention Pins and Set Screws, Zero Roll Pins Used in Assembly



Fenced-in Magazine Release with Ambi. Trigger Finger Indexing Shelves



Captured Rear Takedown Pin and Buffer Detent Assembly Shelves





 **UTG<sup>®</sup>**  
**PRO**



# AR15 BILLET RECEIVERS



**UTG PRO®** 

## AR15 BILLET RECEIVERS

- » Proudly Designed and Made in USA
- » Matte Black Type III Class II Hard Coat Anodized 7075-T6 Billet Construction
- » Glove-friendly Oversized Trigger Guard
- » Fenced-in Magazine Release and Ambidextrous Trigger Finger Indexing Points
- » Shortened and Flared Magwell Fully Compatible with Most Magazines and Drums
- » Threaded Steel Retention Pins and Set Screws, Zero Roll Pins Used in Assembly
- » Compatible with Most Furniture, Fire Control Groups, Bolt Carrier Groups, and Parts Kits
- » Captured Buffer and Rear Takedown Pin Detent and Spring
- » Tight Tolerance Fit of Upper and Lower Receiver, Takedown and Pivot Pins, and Barrel Extension
- » Upper Receiver Cut for M4 Feed Ramps
- » Upper Receiver Flat Top Features an Additional Picatinny Slot
- » Optional Receiver Tensioning Screw Included
- » Multi-caliber Marked

**AR15 BILLET UPPER RECEIVER / FUR001**

**AR15 BILLET LOWER RECEIVER / FLR001**

**AR15 BILLET RECEIVER SET / FCR01**



Optional Lower to Upper Tensioning Screw Included



Fenced-in Magazine Release with Ambi. Trigger Finger Indexing Shelves



Lightweight with Extra Flat Top Picatinny Slot



Compatible with Most Furniture, FCGs, BCGs, and Parts Kits



# HANDGUARDS

## FOR ALL YOUR REAL ESTATE NEEDS

Configuring your firearm to achieve your goals requires a handguard with a solid foundation. Balance between mounting real estate, ergonomics of mounted attachments, and overall weight is key. A solid lockup is a given. Being straightforward and easy to install is welcomed. Our UTG PRO® selection of Michigan-made handguards is the foundation for your build and delivers these promises with quality materials at a price accessible to everyone.







## JUMP TO A SERIES

**UTG PRO®  MONOLITHIC HANDGUARDS** 108  
**FOR MP5® & MP5K [NEW]**

**UTG PRO®  FREE FLOAT HANDGUARDS** 110

FORERUNNER 110

ARWEN 112

SUPER SLIM SD 114

ULTRA SLIM 116

SUPER SLIM 116

**UTG PRO®  DROP-IN HANDGUARDS** 117

AR15 Drop-in 117

AKM Drop-in 118

RUGER PC Carbine Drop-in 119

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE  
TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)





# MPS MONOLITHIC





# MONOLITHIC HANDGUARD FOR MP5® & MP5K

**UTG PRO®**  **NEW**

## MONOLITHIC M-LOK® HANDGUARDS FOR MP5® & MP5K

- » Proudly Designed and Made in USA
- » Monolithic Design Combines Mounting and Optics Real Estate into One Rigid Mount
- » 6061-T6 Aluminum with Dehorned Corners and Melted Contours
- » Extended Picatinny Flat Top with Cutout for Serial Number Identification
- » M-LOK® Slots Around Circumference of Handguard
- » Chamfered Locking Recess Notch Prevents Hot Spots and Snag Points while Manipulating Charging Handle
- » Integral Left and Right Side Anti-Rotational QD Sockets (MTU055SSMK excluded)
- » US PAT. 11656059



Patented Claw Mount Locking Interface (US PAT. 11656059)



Chamfered Locking Recess Notch



Extended Picatinny Flat Top with Cutout for Serial Number



For MP5K / MTU055SSMK



For MP5® / MTU055SSM



For MP5®, Extended Length / MTU055SSME **[NEW]**

### FOR MP5K & MP5K CLONES

### FOR MP5® & MP5® CLONES

### FOR MP5® & MP5® CLONES EXTENDED LENGTH

	MTU055SSMK	MTU055SSM	MTU055SSME
<i>Length</i>	10.94" (278 mm)	13.65" (347 mm)	15.90" (404 mm)
<i>Width x Height</i>	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)	1.94" x 2.75" (49 x 70 mm)
<i>Weight</i>	6.9 oz (196 g)	9.6 oz (272 g)	10.5 oz (298 g)
<i>M-LOK® Slots</i>	8 Full, 3 Half	17 Full, 5 Half	17 full, 6 half
<i>Picatinny Slots</i>	13	16	26



**F**ORERUNNER



 **UTG<sup>®</sup>  
PRO**



# FORERUNNER FREE FLOAT HANDGUARDS



## AR15 FORERUNNER FREE FLOAT M-LOK® HANDGUARDS

- » Precision Machined from 6061-T6 Aluminum and Finished in a Matte Black Anodization
- » Unique Patented Titanium Barrel Nut Requires Little to No Timing in Relation to the Gas Tube and Installation Screws
- » M-LOK® Slots on 3 Slot Tracks for Mounting Accessories
- » Handguard Features an Ergonomic Octagonal Profile and Machined Lightening Cuts Made Throughout with a 3-Slot Top Picatinny Rail Found at the Front and Rear
- » Integral Anti-Rotation Tabs to Ensure Accurate Alignment with Upper Receiver
- » Compatible with Left or Right Handed AR15 Upper Receivers
- » Includes M-LOK® Picatinny Rail Section, QD Sling Swivel Adaptor, Installation Hardware, and Barrel Nut Wrench
- » US PAT. 10670369



5 INCH



7 INCH



10 INCH



14 INCH



15 INCH



17 INCH

	MTU049SPM	MTU044SPM	MTU045SPM	MTU046SPM	MTU047SPM	MTU048SPM
<b>Length</b>	4.8" (122 mm)	6.8" (173 mm)	9.8" (249 mm)	13.8" (351 mm)	15.3" (389 mm)	17.3" (439 mm)
<b>Width x Height</b>	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)
<b>Weight</b>	4.6 oz (130 g)	5.7 oz (162 g)	7.3 oz (207 g)	9.5 oz (269 g)	10.3 oz (292 g)	11.5 oz (326 g)
<b>M-LOK® Slots</b>	3 Full, 3 Half	13 Full	19 Full	25 Full, 7 Half	28 Full, 3 Half	31 Full, 7 Half
<b>Picatinny Slots</b>	6	6	6	6	6	6



ARWEN

 **UTG<sup>®</sup>  
PRO**




# ARWEN FREE FLOAT HANDGUARDS

**UTG PRO®** 

## AR15 ARWEN FREE FLOAT M-LOK® HANDGUARDS

- » Arwen Meaning “Fair” in Welsh, is the Go-to UTG PRO® Handguard Series for Shooters Looking for a Well-Balanced and Fully-Featured Handguard with a Streamlined Look
- » Precision Machined from 6061-T6 Aluminum and Finished in a Matte Black Anodization
- » Unique Patented Steel Barrel Nut Requires Little to No Timing in Relation to the Gas Tube and Installation Screws and Furthermore, Does not Require a Proprietary Wrench for Installation
- » M-LOK® Slots at the 3, 6, and 9 O'clock Positions along with Additional 45 Degree M-LOK® Slots Located at the Front of the Handguard
- » Integral Anti-Rotation Tabs to Ensure Accurate Alignment with Upper Receiver
- » Lightening Cuts Throughout the Handguard Keep Weight to a Minimum
- » Compatible with Left or Right Handed AR15 Upper Receivers
- » Includes Installation Hardware and Barrel Nut Wrench
- » US PAT. 10670369

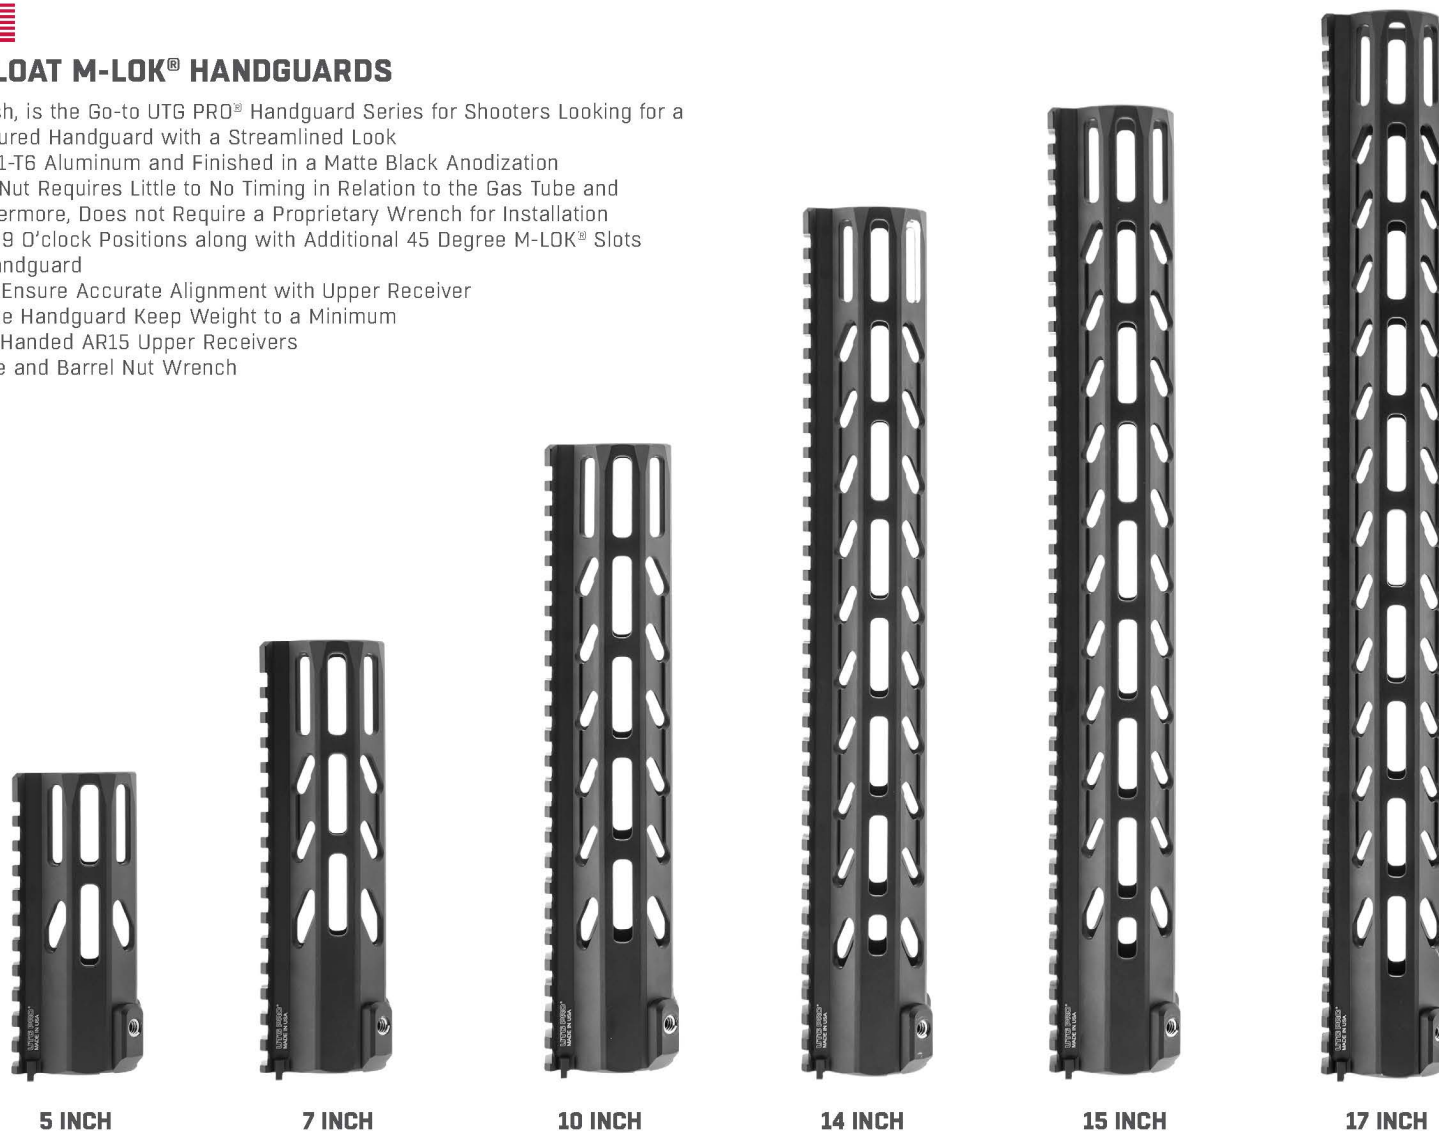

**5 INCH**

**7 INCH**

**10 INCH**

**14 INCH**

**15 INCH**

**17 INCH**

	<b>MTU049SEM</b>	<b>MTU044SEM</b>	<b>MTU045SEM</b>	<b>MTU046SEM</b>	<b>MTU047SEM</b>	<b>MTU048SEM</b>
<b>Length</b>	4.8" (122 mm)	6.8" (173 mm)	9.8" (249 mm)	13.8" (351 mm)	15.3" (389 mm)	17.3" (439 mm)
<b>Width x Height</b>	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)	1.69" x 2.07" (43 x 53 mm)
<b>Weight</b>	6.0 oz (170 g)	7.4 oz (210 g)	9.4 oz (266 g)	12.1 oz (343 g)	13.1 oz (371 g)	14.4 oz (408 g)
<b>M-LOK® Slots</b>	10 Full	13 Full	19 Full	25 Full, 3 Half	28 Full, 3 Half	34 Full
<b>Picatinny Slots</b>	11	16	24	34	38	43



# SUPER SLIM ED





# SUPER SLIM SD FREE FLOAT HANDGUARDS

**UTG PRO®** 

## AR15 SUPER SLIM SUPPRESSED FREE FLOAT M-LOK® HANDGUARDS

- » 1.67" Inner Diameter for Compatibility with Suppressors
- » Precision Machined from 6061-T6 Aluminum and Finished in a Matte Black Anodization
- » M-LOK® Slots on 7 Slot Tracks for Mounting Accessories
- » Ergonomic Octagonal Profile with Grooved Surface Provides a Comfortable Means of Handling
- » Full Length Top Picatinny Rail is Flush and Continuous with Upper Receiver
- » Integral Anti-rotation Tabs to Ensure Accurate Alignment with Upper Receiver
- » Compatible with Left or Right Handed AR15 Upper Receivers
- » Includes M-LOK® Picatinny Rail Section, QD Sling Swivel Adaptor, Installation Hardware, and Barrel Nut Wrench
- » US PAT. 10670369



**7 INCH**



**10 INCH**



**14 INCH**



**15.5 INCH**

	MTU044XLM	MTU045XLM	MTU046XLM	MTU047XLM
<i>Length</i>	7" (178 mm)	10" (254 mm)	14" (356 mm)	15.5" (394 mm)
<i>Width x Height</i>	1.96" x 2.20" (50 x 56 mm)	1.96" x 2.20" (50 x 56 mm)	1.96" x 2.20" (50 x 56 mm)	1.96" x 2.20" (50 x 56 mm)
<i>Inner Diameter</i>	1.67" (42 mm)	1.67" (42 mm)	1.67" (42 mm)	1.67" (42 mm)
<i>Weight</i>	11.4 oz (323 g)	13.7 oz (388 g)	17.1 oz (485 g)	18.3 oz (519 g)
<i>M-LOK® Slots</i>	21	35	49	56
<i>Picatinny Slots</i>	16	24	34	38





## ULTRA SLIM & SUPER SLIM FREE FLOAT HANDGUARDS

### UTG PRO®


- » Precision Machined from 6061-T6 Aluminum
- » Ergonomic Octagonal Profile with Finger Grooves for a Solid and Comfortable Grip
- » Integral Anti-rotation Tabs to Ensure Accurate Alignment with Upper Receiver
- » US PAT. 8806792

#### ULTRA SLIM FREE FLOAT M-LOK® HANDGUARDS

- » Left and Right Side Grip Serrations
- » Streamlined Top End with 3-slot Picatinny Rail at the Front and Rear of Handguard
- » Compatible with Left or Right Handed Forged Mil-spec AR15 Upper Receivers

#### SUPER SLIM FREE FLOAT M-LOK® HANDGUARDS

- » Compatible with Right Handed Forged Mil-spec AR15 Upper Receivers Only
- » Scalloped Top Picatinny Rail Edges for Easy and Snag Free Accessory Mounting

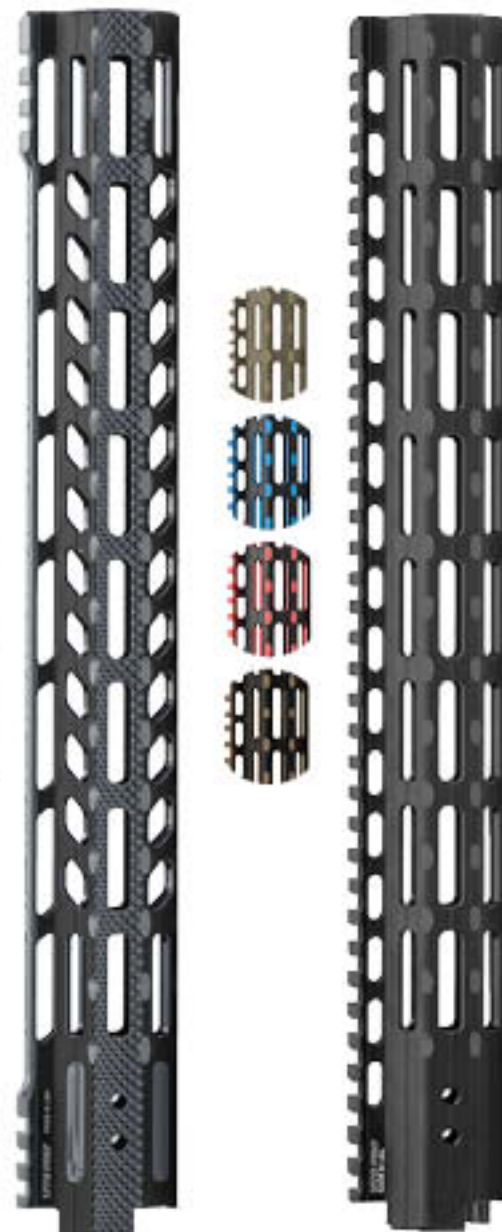

	ULTRA SLIM	SUPER SLIM
Black Anodized 	MTU019SSM3	MTU019SSM
FDE CERAKOTE® 	-	MTU019SSM0
Black/Blue 2-Tone Anodized 	MTU019SSM3B2	MTU019SSMB2
Black/Red 2-Tone Anodized 	MTU019SSM3R2	MTU019SSMR2
Black/Bronze 2-Tone Anodized 	-	MTU019SSMZ2
Length	15.3" (389 mm)	15.3" (389 mm)
Width x Height	1.53" x 1.98" (39 x 50 mm)	
Weight	11.5 oz (328 g)	11.5 oz (328 g)
M-LOK® Slots	24	58
Picatinny Slots	8	37



# DROP-IN HANDGUARDS



- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Two-piece Drop-in Design Requires no Permanent Modification

## CARBINE-LENGTH QUAD RAIL

- » Compatible with Carbine-Length Direct Impingement (DI) Systems with Standard Delta Ring Assembly and Round Front Handguard Cap
- » MTU001 and MTU001T are also compatible with RUGER® AR-556®



CARBINE-LENGTH

CARBINE-LENGTH  
EXTENDED TOP RAIL

CARBINE-LENGTH  
EXTENDED TOP RAIL  
FSP CUTOUT

	MTU001	MTU001T	MTU015	MTU007
Length	6.7" (170 mm)	7.3" (185 mm)	10.7" (272 mm)	8.7" (221 mm)
Width x Height	2.44" x 2.44" (62 x 62 mm)	2.44" x 2.44" (62 x 62 mm)	2.44" x 2.44" (62 x 62 mm)	2.44" x 2.44" (62 x 62 mm)
Weight	11.3 oz (320 g)	11.3 oz (320 g)	17.0 oz (482 g)	14.7 oz (417 g)
Picatinny Slots	T14 / B14 / L14 / R14	T18 / B17 / L16 / R16	T19 / B23 / L25 / R25	T18 / B18 / L18 / R18

## MID-LENGTH QUAD RAIL

- » Compatible with Mid-length DI Systems with Standard Delta Ring Assembly and Triangular Handguard Cap



MID-LENGTH

## CARBINE-LENGTH SUPER SLIM M-LOK® HANDGUARDS

- » Compatible with Carbine-length DI Systems with Standard Delta Ring Assembly and Round Front Handguard Cap
- » Compatible with RUGER® AR-556®



CARBINE-LENGTH  
EXTENDED TOP RAIL



CARBINE-LENGTH  
EXTENDED TOP RAIL  
FSP CUTOUT

	MTU001SSM	MTU015SSM
Length	7.3" (185 mm)	15.0" 381 mm)
Width x Height	1.78" x 2.10" (45 x 53 mm)	1.78" x 2.10" (45 x 53 mm)
Weight	6.2 oz (176 g)	12.4 oz (352 g)
M-LOK® Slots	24	45
Picatinny Slots	18	30





# AKM SUPER SLIM DROP-IN HANDGUARD

**UTG PRO®**  

- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Compatible with Most Milled or Stamped Romanian, Chinese, and US AK47/AK74 Pattern Rifles
- » Two-piece Drop-in Design Requires No Permanent Modification
- » US PAT. 10962324



DOCTER® Footprint MRDS Plate Included



Modular Top End Mounts Included 9 Slot Picatinny Rail Section

	MTU053SSM
Length x Width x Height	6.20" x 1.61" x 2.63" (157 x 41 x 67 mm)
Weight	9.7 oz (275 g)
M-LOK® Slots	15



# AKM DROP-IN QUAD RAIL HANDGUARDS

**UTG PRO®**  

- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Lightening Cut MIL-STD-1913 Picatinny Quad Rail with Left/Right Integral QD Sling Swivel Housings
- » Two-piece Drop-in Design Requires No Permanent Modification



## FOR UNIVERSAL


- » Compatible with Most Milled or Stamped Romanian, Chinese, and US AK47/AK74 Pattern Rifles

/ **MTU009**



## FOR ZASTAVA M92

/ **MTU052**

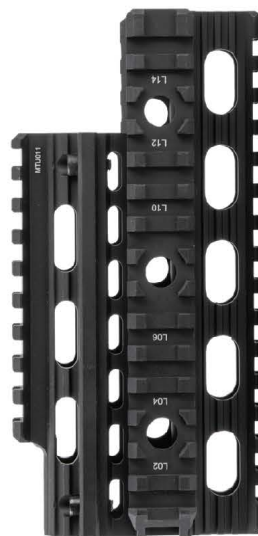

## FOR YUGO M70


- » Fits Yugo M70 Variants and is also compatible with the Zastava N-PAP after Removal of Rear Handguard Retainer

/ **MTU011**

# SUPER SLIM FOREND FOR RUGER® PC CARBINE™

**UTG PRO®** 

- » Matte Black Anodized 6061-T6 Aluminum Construction
- » Machined Lightening Cuts Throughout Forend Keep Weight to a Minimum
- » Melted Contours, Chamfered Edges, and Dehorned Corners

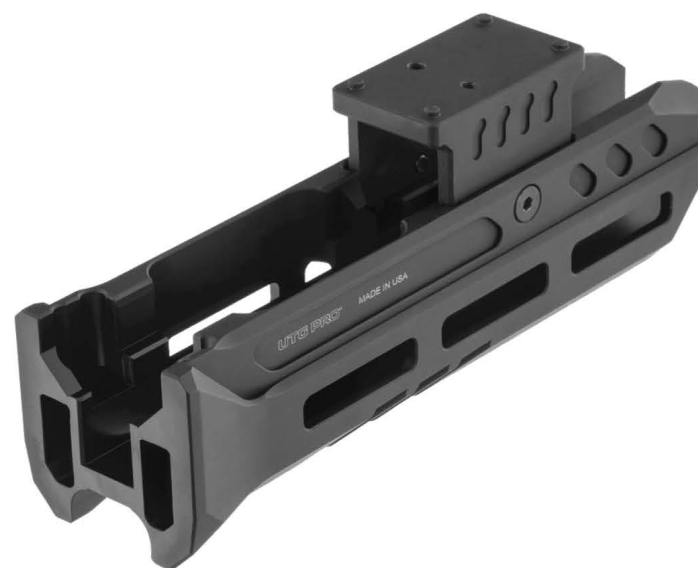

8 M-LOK® Slots, 3 Slots at 3 and 9 O'clock and 2 Slots at 6 O'clock



Lower 1/3 Co-witness DOCTER® Footprint Optic Mount Included

	<b>MTU050SSM</b>
<b>Length x Width x Height</b>	6.49" x 1.80" x 1.73" [165 x 46 x 44 mm] Height with MRDS Mount: 3.45" [88 mm]
<b>Weight</b>	9.3 oz [264 g]
<b>M-LOK® Slots</b>	8

	<b>MTU009</b>	<b>MTU052</b>	<b>MTU011</b>
<b>Length x Width</b>	8.4" [213 mm]	6.5" [165 mm]	6.5" [165 mm]
<b>Width x Height</b>	2.05" x 3.1" [52 x 79 mm]	2.05" x 3.18" [52 x 81 mm]	2.05" x 3.1" [52 x 79 mm]
<b>Weight</b>	9.2 oz [261 g]	9.5 oz [269 g]	9.5 oz [269 g]
<b>Picatinny Slots</b>	T14 / B14 / L14 / R14	T9 / B15 / L15 / R15	T9 / B15 / L15 / R15



# BIPODS

A man in a tan shirt and black cap is aiming a rifle with a large scope in a wooded area. The rifle is mounted on a bipod. The man is looking through the scope with a focused expression. The background is a dense forest with green foliage.


## ROCK SOLID FOUNDATION

Purpose-built across a multitude of disciplines with one common goal: a rock solid shooting interface. Try our new GOLIATH™ bipods for precision long distance, our slim 2-piece RECON FLEX® line for stowing while hunting, or a classic spring-loaded solution. Whether you need pan and tilt or a specific angle, height, or deployment method, our wide selection is designed to solve your every need.





## JUMP TO A SERIES

GOLIATH™ BIPODS <b>[NEW]</b>	122
BIG BORE FULL STABILITY BIPOD	124
OVER BORE BIPOD	126
UTG PRO®  TBNR® BIPODS	128
RECON 360® TL BIPODS	130
RECON FLEX® BIPODS	132
QUICK DETACH BIPODS	134
D GRIP®	135

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]





# GOLIATH™





# GOLIATH™ BIPODS



## MEDIUM PROFILE

8.01" - 12.24" Center Height  
/ TL-BPFS02Q



## EXTREME LOW PROFILE

5.90" - 8.05" Center Height  
/ TL-BPFS03Q



## GOLIATH™ BIPODS

**NEW**

- » Big Bore Construction for Long Distance Precision Shooting Up to .50 BMG, Available in Medium and Extreme Low Profile (5.9" - 8")
- » Wide 60° Open Angle for Improved Stability
- » Independent Tension Adjustable 40° Tilting and 28° Panning Left and Right
- » Three-position Foldable and Center Height Adjustable Legs Lock with Authority at Each Position and Height
- » Tool-free Tension Adjustable QD Picatinny Base with Squared Integral Recoil Lugs
- » Matte Black Anodized Aluminum and Steel Construction



Independent Tension Adjustable 40° Tilting and 28° Panning Left and Right



Center Height Adjustable Legs Lock with Authority at Each Position and Height



QD Rubber Oversized Feet for Added Traction, Compatible with Most Aftermarket QD Foot Pads

	TL-BPFS02Q	TL-BPFS03Q
Mount Type	Picatinny	Picatinny
Center Height	8.01" - 12.24"	5.90" - 8.05"
Open Angle	60°	60°
Tension Adjustable Panning	28°	28°
Tension Adjustable Tilting	40°	40°
Extendable Leg Positions	14	7
Extension Method	Manual	Manual
Retraction Method	Manual	Manual
Foldable Positions	0°, 45°, 90°	0°, 45°, 90°
Foot Pad	XL Rubberize Pad	XL Rubberize Pad
Weight	27.0 oz (773 g)	24.5 oz (695 g)



# BIG CORE FS





# BIG BORE FULL STABILITY BIPOD



## BIG BORE FULL STABILITY BIPOD

- » Matte Black Anodized Aluminum Construction with Reinforced Steel Components Designed from the Ground Up to Withstand Big Bore Calibers up to .50 BMG
- » Reinforced Picatinny Mounting Base Features a Longer Surface Area Equipped with a Squared Steel Crossbolt
- » Lockable and Height Adjustable Legs Provide a Center Height from 9.61"-14.30" and a Wide 70° Open Angle for Increased Stability
- » Posi-lock Push Buttons Feature a Large Surface Area for Ease of Use while Wearing Gloves



0°, 45°, & 90° Folding Leg Positions with Steel-on-steel Lockup



Tension Adjustable 35° Panning and 55° Left and Right Tilt



Rotatable Footpads Self Adjust to Uneven Surfaces and Bipod Leg Positioning

	TL-BPFS01-A
Mount Type	Picatinny
Center Height	9.61" - 14.30"
Open Angle	70°
Tension Adjustable Panning	35°
Tension Adjustable Tilting	55°
Extendable Leg Positions	9
Extension Method	Manual
Retraction Method	Automatic
Foldable Positions	0°, 45°, 90°
Foot Pad	Steel
Weight	34.9 oz (991 g)



OVERGORE





# OVER BORE BIPOD



## OVER BORE BIPOD

- » Wide Open Angle and Lowered Center of Gravity Improves Stability
- » Quick Detachable Picatinny Base Designed to Mount at the 12 O'clock
- » 3 Position Foldable with Lockable Notched Legs, Center Height Adjustable from 7.20" - 10.96"
- » 22° Panning and 44° Tension Adjustable Left and Right Tilt
- » Matte Black Anodized Aluminum Construction with Reinforced Steel Components



Quick Detachable Mounting Base Designed to Mount Over Rifle Bore



0°, 45°, & 90° Folding Leg Positions with Steel-on-steel Lockup



Tension Adjustable 44° Left & Right Tilt

	TL-BPOB01-A
Mount Type	Picatinny
Center Height	7.20" - 10.96"
Open Angle	70°
Tension Adjustable Panning	22°
Tension Adjustable Tilting	44°
Extendable Leg Positions	7
Extension Method	Manual
Retraction Method	Manual
Foldable Positions	0°, 45°, 90°
Foot Pad	Rubberized
Weight	24.1 oz (683 g)

## ADDITIONAL ACCESSORIES

### OVER BORE BIPOD QD MOUNT

- » Quick Detachable Picatinny Mount for the UTG® Over Bore Bipod (One Piece Included with TL-BPOB01-A)
- » Allows a Single Over Bore Bipod to be Quickly Removed and Attached Between Multiple Rifles
- » Tension Adjustment Knob Controls the Amount of Tension Felt when Tilting

/ TL-BPAD2





THE BEST NEVER REST®





# TBNR® BIPODS



## M-LOK®

8.59" - 11.02" Center Height / TLUBP01M  
7.24" - 9.05" Center Height / TLUBP02M-A

## PICATINNY

8.57" - 11.09" Center Height / TLUBP01  
7.22" - 9.03" Center Height / TLUBP02-A



## UTG PRO® TBNR® BIPODS

- » 3 Position Folding with Steel-on-steel Lockup
- » Patented Height Adjustable Spiral Guided Leg Extensions with Steel Ball Bearing Detent Ring Locks Manages Height Adjustment and Retention
- » Interchangeable Foot Pads Compatible with Most Aftermarket Pads with QD Locking Detent
- » Type III Class 2 Matte Black Hard Coat Anodized 6061-T6 and 7075-T6 Aluminum Construction with Reinforced Steel Components
- » US PAT. 10323897, US PAT. 10690434



Performance Tested and Evaluated



Height Adjustable Spiral Guided 7075-T6 Aluminum Leg Extensions with Automatic Leg Retraction



Tension Adjustable 360° Panning & 19° Tilt Forward, Rearward, Left, and Right



0°, 45°, & 90° Folding Leg Positions with Steel-on-steel Lockup

	TLUBP01M	TLUBP02M-A	TLUBP01	TLUBP02-A
<b>Mount Type</b>	M-LOK®	M-LOK®	Picatinny	Picatinny
<b>Center Height</b>	8.59" - 11.02"	7.24" - 9.05"	8.57" - 11.09"	7.22" - 9.03"
<b>Open Angle</b>	50°	50°	50°	50°
<b>Tension Adjustable Panning</b>	360°	360°	360°	360°
<b>Tension Adjustable Tilting</b>	19°	19°	19°	19°
<b>Extendable Leg Positions</b>	8	6	8	6
<b>Extension Method</b>	Manual	Manual	Manual	Manual
<b>Retraction Method</b>	Automatic	Automatic	Automatic	Automatic
<b>Foldable Positions</b>	0°, 45°, 90°	0°, 45°, 90°	0°, 45°, 90°	0°, 45°, 90°
<b>Interchangeable Foot Pad</b>	Aluminum	Aluminum	Aluminum	Aluminum
<b>Swivel Stud Kit Included</b>	No	No	Yes	Yes
<b>Weight</b>	19.0 oz (539 g)	17.5 oz (496 g)	19.7 oz (558 g)	18.3 oz (519 g)





**RECON 360® TL**





# RECON 360® TL BIPODS



## M-LOK®

5.70" - 7.00" Center Height / TL-BPM02-B  
6.69" - 9.10" Center Height / TL-BPM01-B  
8.10" - 11.99" Center Height / TL-BPM03-B

US PAT. D758522

## PICATINNY

5.68" - 7.10" Center Height / TL-BP02-B  
6.64" - 9.10" Center Height / TL-BP01-B  
7.82" - 12.00" Center Height / TL-BP03-B

US PAT. D758521, US PAT. D758522



## RECON 360® TL BIPODS

- » RECON 360® Smooth 360° Panning with Additional 15° Tilt Forward, Rearward, Left, and Right
- » Panning and Tilting Tension Adjustable with Throw Lever at Mount Base
- » Tension Adjustment Throw Lever is Use Serviceable to Readjust Over Time
- » 3 Lockable and Adjustable Center Heights with Included Swivel Stud Mount Adaptor for Picatinny Models



**FINE-TUNE ADJUSTMENT**  
Tension Adjustment Throw Lever is User Friendly and Serviceable being re-adjustable over time



**VERSATILE PANNING & TILTING**  
Smooth 360° panning with additional 15° forward, rearward, left, and right tilt

	TL-BPM02-B	TL-BPM01-B	TL-BPM03-B	TL-BP02-B	TL-BP01-B	TL-BP03-B
Mount Type	M-LOK®	M-LOK®	M-LOK®	Picatinny	Picatinny	Picatinny
Center Height	5.70" - 7.00"	6.69" - 9.10"	8.10" - 11.99"	5.68" - 7.10"	6.64" - 9.10"	7.82" - 12.00"
Open Angle	50°	50°	50°	50°	50°	50°
Tension Adjustable Panning	360°	360°	360°	360°	360°	360°
Tension Adjustable Tilting	15°	15°	15°	15°	15°	15°
Extendable Leg Positions	3	5	7	3	5	7
Extension Method	Manual	Manual	Manual	Manual	Manual	Manual
Retraction Method	Manual	Manual	Manual	Manual	Manual	Manual
Foldable Positions	0°, 45°, 90°	0°, 45°, 90°	0°, 45°, 90°	0°, 45°, 90°	0°, 45°, 90°	0°, 45°, 90°
Foot Pad	Rubberized	Rubberized	Rubberized	Rubberized	Rubberized	Rubberized
Swivel Stud Kit Included	No	No	No	Yes	Yes	Yes
Weight	11.1 oz (316 g)	11.3 oz (320 g)	14.6 oz (416 g)	12.2 oz (347 g)	13.6oz (386g)	15.7 oz (447 g)



# RECON FLEX<sup>®</sup>





# RECON FLEX® BIPODS



## RECON FLEX® II BIPODS

- » 5 Position Foldable with Lockable Notched Legs and Automatic Leg Extension Deployment
- M-LOK®**  
7.30" - 8.87" Center Height / TL-BPDM03  
8.37" - 12.08" Center Height / TL-BPDM04

## RECON FLEX® BIPODS

- » 5 Position Foldable with Lockable Notched Legs
- M-LOK®**  
5.96" - 8.39" Center Height / TL-BPDM01  
8.13" - 11.95" Center Height / TL-BPDM02
- KEYMOD**  
5.96" - 8.39" Center Height / TL-BPDK01

## RECON FLEX® BIPODS

- » Low Profile Separated Legs Attach to M-LOK® Handguards at 3 and 9 O'clock Positions
- » Lightweight, Wide Angle Stance, and Slim Low Profile when Stowed
- » 5 Position Bidirectional Folding with Recon Flex® II Featuring Automatic Leg Extension Deployment

	TL-BPDM03	TL-BPDM04	TL-BPDM02	TL-BPDM01	TL-BPDK01
Mount Type	M-LOK®	M-LOK®	M-LOK®	M-LOK®	Keymod
Center Height	7.30" - 8.87"	8.37" - 12.08"	8.13" - 11.95"	5.96" - 8.39"	5.96" - 8.39"
Open Angle	50°	50°	50°	50°	50°
Extendable Leg Positions	5	8	7	5	5
Extension Method	Automatic	Automatic	Manual	Manual	Manual
Retraction Method	Manual	Manual	Manual	Manual	Manual
Foldable Positions	0°, 45°, 90°, 135°, 180°	0°, 45°, 90°, 135°, 180°	0°, 45°, 90°, 135°, 180°	0°, 45°, 90°, 135°, 180°	0°, 45°, 90°, 135°, 180°
Foot Pad	Rubberized, Interchangeable	Rubberized, Interchangeable	Rubberized	Rubberized	Rubberized
Weight (2pcs)	11.3 oz (320 g)	12.2 oz (346 g)	14 oz (398 g)	10.8 oz (306 g)	10.8 oz (306 g)





## QUICK DETACH BIPODS



### SUPER DUTY QD BIPOD

- » Heavy Duty Steel and Aluminum Construction with a Matte Black Finish
- » Spring-loaded Folding Legs
- » Adjustable Legs with Spring Loaded Retention Clamp and Locking Thumb Wheel
- » US PAT. 8397421


**QD Lever Lock / 5.56" - 8.00" Center Height / TL-BP98Q**

### ADDITIONAL ACCESSORIES

#### SWIVEL STUD TO PICATINNY ADAPTOR

- » Steel and Aluminum Construction with Rubber Contact Plate to Prevent Marring
- » Converts a Traditional Sling Swivel Stud to Accept Picatinny Mounted Bipods
- » Retains Sling Swivel Stud Functionality when Installed
- » Quick Installation with No Permanent Modification Required

**/ TL-BPAD1**







## RUBBER ARMORED QD BIPOD

- » Protected Rubber Armored Legs Stand up to the Harshesht of Environments
- » 5 Position Extendable Legs Lockable via Thumb Wheel
- » 5 Position Bidirectional Folding Legs
- » US PAT. 8397421

**QD Lever Lock / 6.05" - 8.52" Center Height / TL-BP20Q-A**



## TACTICAL OP BIPODS

- » Heavy Duty Steel and Aluminum Construction with a Matte Black Finish
- » Spring-loaded Folding Legs
- » Adjustable Legs with Locking Thumb Wheel & Automatic Retraction
- » US PAT. 8397421

**QD Lever Lock / 6.24" - 7.37" Center Height / TL-BP78Q**

**QD Lever Lock / 8.22" - 12.59" Center Height / TL-BP88Q**

**Locking Thumb Wheel / 5.80" - 7.50" Center Height / TL-BP78**

**Locking Thumb Wheel / 8.00" - 12.40" Center Height / TL-BP88**

	TL-BP98Q	TL-BP20Q-A	TL-BP78Q	TL-BP88Q	TL-BP78	TL-BP88
<b>Mount Type</b>	Picatinny	Picatinny	Picatinny	Picatinny	Picatinny	Picatinny
<b>Center Height</b>	5.56" - 8.00"	6.05" - 8.52"	6.24" - 7.37"	8.22" - 12.59"	5.80" - 7.50"	8.00" - 12.40"
<b>Open Angle</b>	50°	50°	50°	50°	50°	50°
<b>Panning</b>	15°	15°	15°	15°	15°	15°
<b>Extendable Leg Positions</b>	5	5	3	9	Continuous	Continuous
<b>Extension Method</b>	Manual	Manual	Manual	Manual	Manual	Manual
<b>Retraction Method</b>	Manual	Manual	Automatic	Automatic	Automatic	Automatic
<b>Foldable Positions</b>	0°, 90°	0°, 45°, 90°, 135°, 180°	0°, 90°	0°, 90°	0°, 90°	0°, 90°
<b>Foot Pad</b>	Rubberized	Rubberized	Rubberized	Rubberized	Rubberized	Rubberized
<b>Swivel Stud Kit Included</b>	Yes	Yes	Yes	Yes	Yes	Yes
<b>Weight</b>	13.8 oz (391 g)	12.4 oz (374 g)	11.9 oz (338 g)	15.5 oz (440g)	11.9 oz (338 g)	15.5 oz (440g)

## D GRIP®



- » Ambidextrous Quick Release Deploys Foldable Impact-resistant Bipod Legs Instantly
- » Quickly Transitions from Foregrip to Bipod
- » Contoured Foregrip with Rubberized Inlays
- » 5.60" Foregrip Length with an 8.20" Center Height and 65° Open Angle when Bipod is Deployed
- » US PAT. 8397421, US PAT. 9169958, EU REG: 002245522-0001, EU REG: 002245522-0002

	MNT-DG02Q
<b>Mount Type</b>	Picatinny
<b>Center Height</b>	8.20"
<b>Open Angle</b>	65°
<b>Grip Height</b>	5.60"
<b>Bipod Height</b>	8.20"
<b>Leg Operation</b>	Spring-loaded Deployment
<b>Foot Pad</b>	Aluminum
<b>Weight</b>	12.7 oz (360 g)



# STOCKS, BUFFERS & TUBES

A detailed photograph of an AR-15 style rifle. The rifle is black with a UTG PRO stock, which is a side-folding stock. It has a scope mounted on top. The rifle is resting on a metal surface, possibly a table or a bench. There are pine needles and some debris scattered around the rifle. The background is a blurred forest scene.

## SHOULDER WITH STABILITY

Combine training with ergonomics so you shoulder your stock with ease and consistency no matter your shooting position. Our UTG PRO® stocks are made in Michigan with a range of sizes and designs to provide you a stable, repeatable platform. Modernize your AK with our new AK Side Folding Stock, available for straight tang and Yugo receivers.





## JUMP TO A SERIES

| **UTG PRO®  AK SIDE FOLDING STOCKS [NEW]** 138

| **UTG PRO®  AR COLLAPSIBLE STOCKS** 140

S1 6-Position Stocks & Assemblies

S2 6-Position Stocks & Assemblies

S3 6-Position Stocks & Assemblies

S4 4-Position Stocks & Assemblies

U6 6-Position Stock Assemblies

| **FIXED STOCKS** 142


| **TUBES & BUFFERS** 143

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)





# AK SIDE FOLDING STOCKS

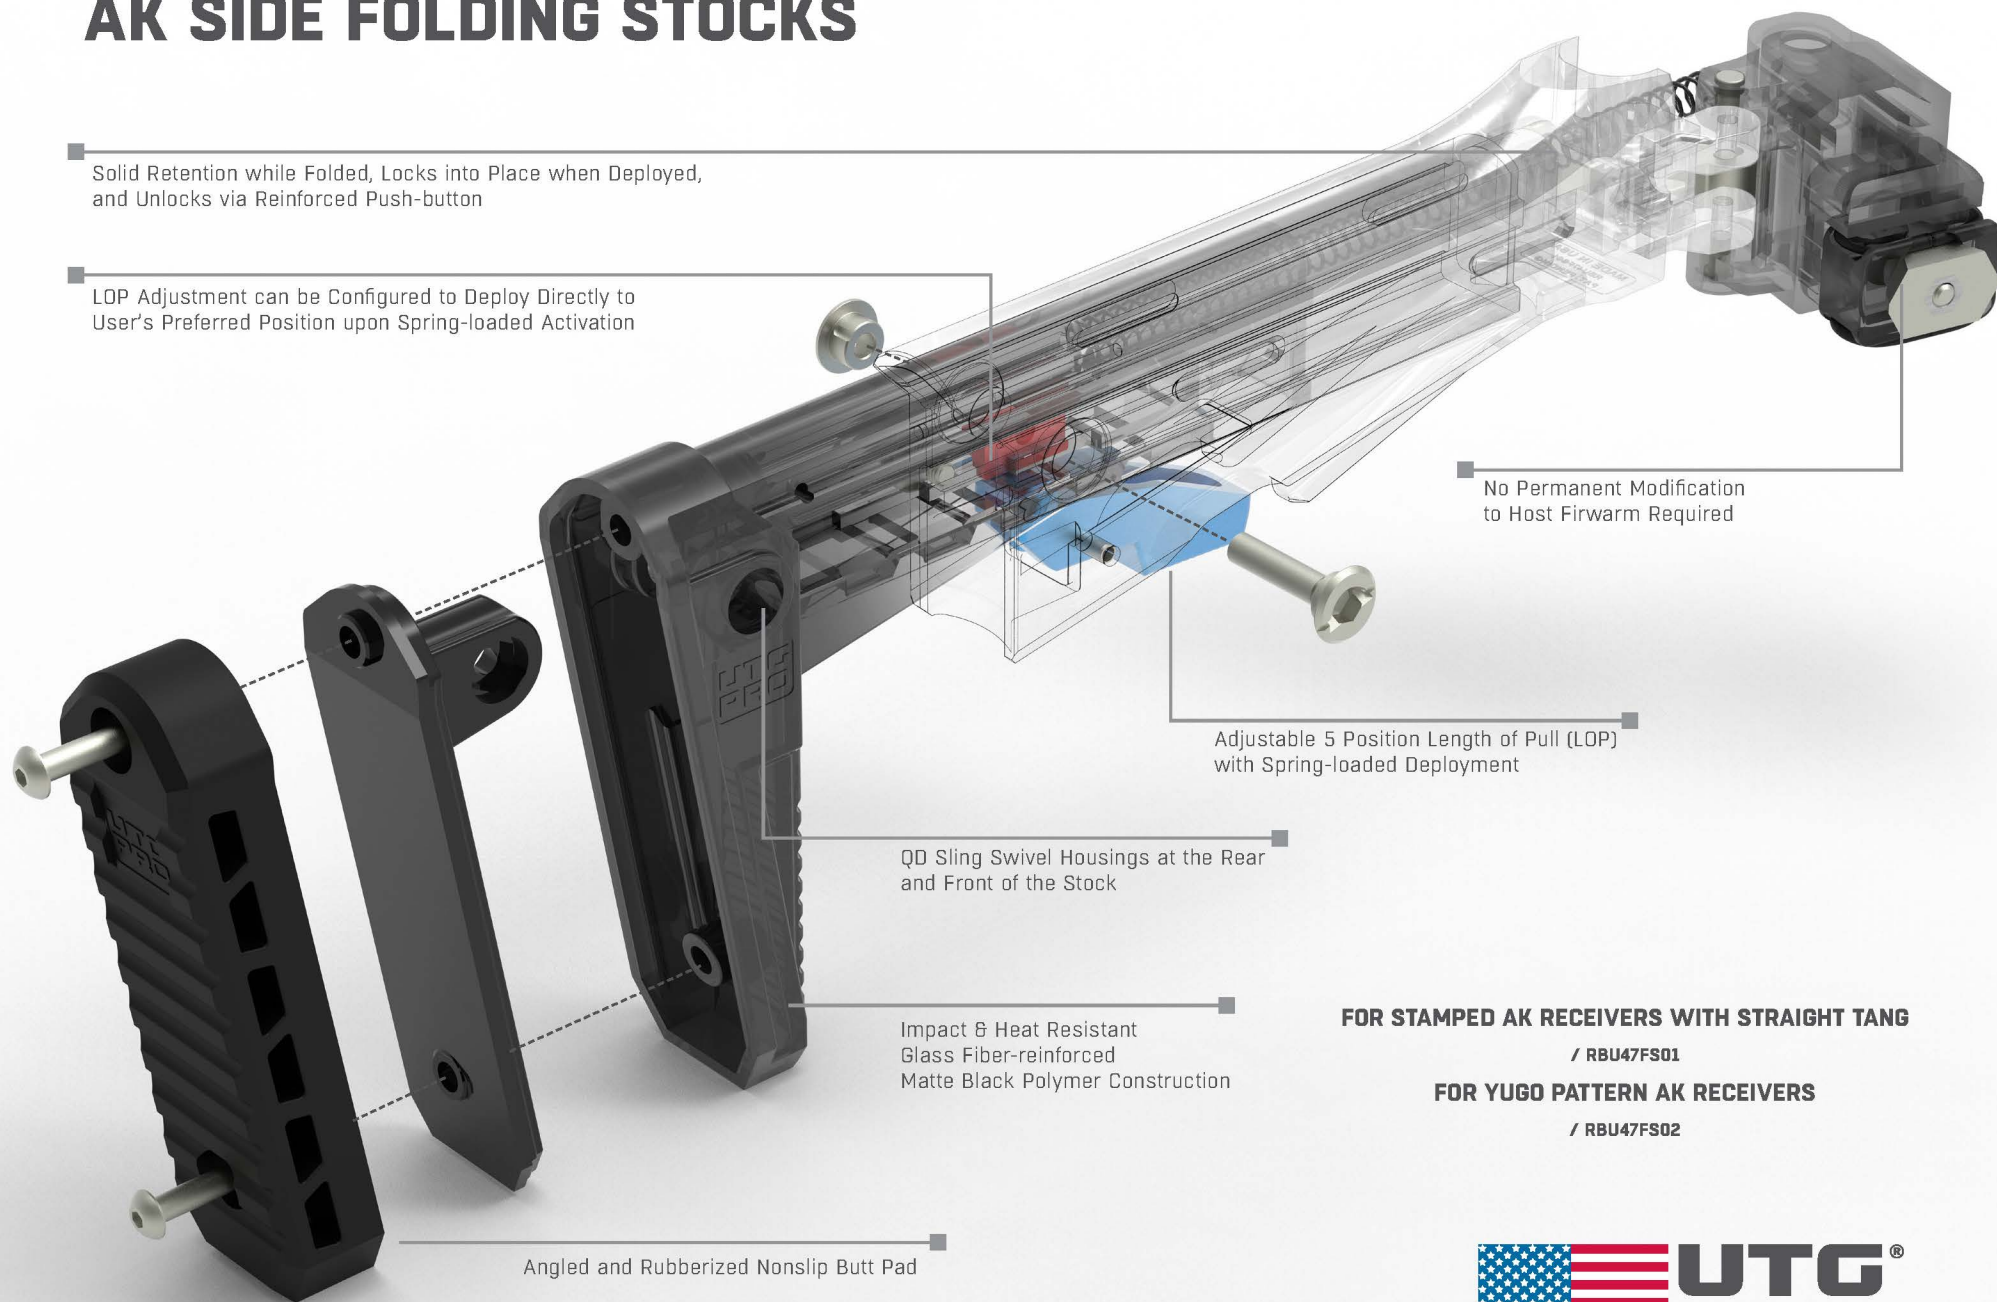

**FOR STAMPED AK RECEIVERS WITH STRAIGHT TANG**

**/ RBU47FS01**

**FOR YUGO PATTERN AK RECEIVERS**


**/ RBU47FS02**







Right-side Folding

Adjustable 5 Position  
Length of Pull (LOP)Spring-loaded  
DeploymentAngled and Rubberized  
Nonslip Butt PadQD Sling Swivel Housings  
at the Rear and FrontReinforced Push-button  
Lockup

## UTG PRO®

### AK SIDE FOLDING STOCKS

- » Proudly Designed and Made in USA
- » Folds to the right for compatibility with side-mounted optics and compact storage and transport
- » Adjustable 5-position Length of Pull (LOP) with spring-loaded quick deployment
- » LOP adjustment can be set to deploy directly to your preset preferred position
- » QD sling swivel housings configurable to left or right side of rear and left front side
- » Solid retention while folded, locks into place when deployed, and unlocks via reinforced push-button
- » Impact and heat-resistant glass fiber-reinforced matte black polymer construction
- » Angled and rubberized nonslip butt pad
- » Compatible with common aftermarket cheek risers
- » Counted as one U.S. made part for the firearm subject to 18 U.S.C. § 922(r)
- » US PAT. 11067360, US PAT. 11598604, US PAT. 11592264

	RBU47FS01	RBU47FS02
<b>Platform</b>	Stamped AK with Straight Tang	Yugo Pattern AK
<b>LOP Adjustment Increment</b>	5 Positions   0.71" (18 mm) per Position	5 Positions   0.71" (18 mm) per Position
<b>LOP Collapsed</b>	13.59" (345 mm)	13.59" (345 mm)
<b>LOP Extended</b>	16.42" (417 mm)	16.42" (417 mm)
<b>Material</b>	Glass Fiber-reinforced Polymer	Glass Fiber-reinforced Polymer
<b>Dimensions</b>	10.69" x 1.95" x 5.35" (272 x 50 x 138 mm)	10.69" x 1.95" x 5.35" (272 x 50 x 138 mm)
<b>Weight</b>	19.5 oz (553 g)	19.5 oz (553 g)



TOP VIEW



S-SERIES



 **UTG<sup>®</sup>**  
**PRO**



# COLLAPSIBLE STOCKS



## S1 MIL-SPEC 6 POSITION STOCKS & ASSEMBLIES

- » Extended 8" Length for Increased Length of Pull

■ / Stock Assembly / RBUS1BM  
■ / Stock Assembly / RBUS1DM  
■ / Stock Only / RBUS1BMS  
■ / Stock Only / RBUS1DMS



## S2 MIL-SPEC 6 POSITION STOCKS & ASSEMBLIES

- » Lightweight Slim Profile with Extended 7.50" Length for Increased Length of Pull

■ / Stock Assembly / RBUS2BM  
■ / Stock Assembly / RBUS2DM  
■ / Stock Only / RBUS2BMS  
■ / Stock Only / RBUS2DMS



## S3 MIL-SPEC 6 POSITION STOCKS & ASSEMBLIES

- » Sub-compact Profile for Lightweight, Comfortable Performance
- » US PAT. D773005

■ / Stock Assembly / RBUS3BM  
■ / Stock Assembly / RBUS3DM  
■ / Stock Only / RBUS3BMS  
■ / Stock Only / RBUS3DMS



## S4 MIL-SPEC 4 POSITION STOCKS & ASSEMBLIES

- » Lightweight, Ultra Sub-compact Profile, Ideal for SBR/SBS Applications
- » Included Removable Cheek Rest for Improved Shooting Stability and Comfort
- » US PAT. D818074

■ / Stock Assembly / RBUS4BM  
■ / Stock Assembly / RBUS4DM  
■ / Stock Only / RBUS4BMS  
■ / Stock Only / RBUS4DMS



## U6 MIL-SPEC 6 POSITION STOCK ASSEMBLIES

- » Dual Standard Sling Loop Attachment Points
- » Lightweight Design with a Classic Look and Feel

■ / Stock Assembly / RBU6BM  
■ / Stock Assembly / RBU6DM

## UTG PRO COLLAPSIBLE STOCKS

- » Proudly Designed and Made in USA
- » Stock Molded from Impact Resistant High Strength Polymer
- » Built for Heavy Duty Use with the Tightest Tolerance Controls to Provide the Most Secure Fit and Function

Black ■	RBUS1BM	RBUS1BMS	RBUS2BM	RBUS2BMS	RBUS3BM	RBUS3BMS	RBUS4BM	RBUS4BMS	RBU6BM
FDE ■	RBUS1DM	RBUS1DMS	RBUS2DM	RBUS2DMS	RBUS3DM	RBUS3DMS	RBUS4DM	RBUS4DMS	RBU6DM
Type	Mil-spec	Mil-spec	Mil-spec	Mil-spec	Mil-spec	Mil-spec	Mil-spec	Mil-spec	Mil-spec
	Stock Assembly	Stock Only	Stock Assembly	Stock Only	Stock Assembly	Stock Only	Stock Assembly	Stock Only	Stock Assembly
Dimensions	8.5" x 2.3" x 5.5" (216 x 58 x 140 mm)		8.0" x 1.5" x 5.3" (203 x 38 x 135 mm)		6.1" x 1.5" x 4.8" (155 x 38 x 122 mm)		4.3" x 1.7" x 4.8" (109 x 43 x 122 mm)		6.9" x 1.7" x 5.2" (175 x 43 x 132 mm)
Weight	23.1 oz (655 g)	12.6 oz (357 g)	19.7 oz (558 g)	9.9 oz (281 g)	16.9 oz (479 g)	7.0 oz (198 g)	15.5 oz (439 g)	5.7 oz (162 g)	16.9 oz (479 g)





# FIXED STOCKS



Cheek Riser Included

## UTG PRO<sup>®</sup>

### S5 FIXED STOCK

- » Proudly Designed and Made in USA
- » Stock Molded from Impact Resistant High Strength Matte Black Polymer
- » Built for Heavy Duty Use with the Tightest Tolerance Controls to Provide the Most Secure Fit and Function
- » Compatible with Rifle-length Receiver Extension Tube, Does Not Require A2 Buttstock Spacer
- » 11" Overall Length with Ergonomic Slanted Cheek Rest and Steel Reinforced Rubberized Butt Pad
- » Integral Picatinny Rail Attaches Included 0.23" Cheek Riser and Other Accessories
- » Reversible Quick Detach Sling Swivel Housing and Standard Sling Swivel Stud

AR / Stock Only / RBUS5BMS-A



Storage Compartment

## A2 FIXED STOCK ASSEMBLIES

- » Stock Molded from Impact Resistant High Strength Polymer
- » RB-T308FB Compatible with ARMALITE<sup>®</sup> AR-10<sup>®</sup>, DPMS<sup>®</sup> LR-308, S&W M&P<sup>®</sup> 10, and Other Clones

AR15 / Stock Assembly / RB-T469B

AR308 / Stock Assembly / RB-T308FB

	RBUS5BMS-A	RB-T469B	RB-T308FB
Platform	AR	AR15	AR308
	Stock Only	Stock Assembly	Stock Assembly
Dimensions	10.5" x 2.0" x 5.6" (267 x 51 x 142 mm)	10.8" x 1.6" x 5.1" (271 x 41 x 130 mm)	10.8" x 1.6" x 5.1" (271 x 41 x 130 mm)
Weight	14.8 oz (420 g)	26.4 oz (748 g)	25.5 oz (723 g)




# TUBES & BUFFERS




**UTG PRO®** 

## MIL-SPEC 6 POSITION RECEIVER EXTENSION TUBES & KITS

- » Extension Tube CNC Machined from 7075-T6 or 6061-T6 Aircraft Aluminum with Precisely Rolled Threads for Durable Thread Engagement with Lower Receiver
- » Tightest Tolerance Controls for a Secure Fit and Function with Various Collapsible Stocks
- » Finished in a Matte Black/Blue/Red/Bronze Hard Coat Anodization or FDE CERAKOTE®

- / Tube Only / TLU001
- / Tube Only / TLU001R
- / Tube Only / TLU001B
- / Tube Only / TLU001D 
- / Tube Only / TLU001Z
- / Tube Only / 7075-T6 / TLU001MS

- / Tube Kit / TLU001-KIT
- / Tube Kit / TLU001D-KIT 



**UTG PRO®** 

## AR308 6 POSITION RECEIVER EXTENSION TUBE

- » 6-position Mil-spec Diameter Receiver Extension Tube for AR308 Rifles
- » Extension Tube CNC Machined from 6061-T6 Aircraft Grade Aluminum with Precisely Rolled Threads for Durable Thread Engagement with Lower Receiver
- » Tightest Tolerance Controls for a Secure Fit and Function with Various Collapsible Stocks
- » Finished in a Matte Black Type III Class II Hard Coat Anodized Finish

- / Tube Only / TLU002



## CARBINE-LENGTH RECOIL BUFFERS

- » Potentially Increases Dwell Time, Eases Extraction, and Reduces Felt Recoil

- H2 / 4.6 oz / RB-T6BFH2
- H3 / 5.4 oz / RB-T6BFH3
- HC / 3.0 oz / RB-T6BFHC



**UTG PRO®** 

## AR PISTOL RECEIVER EXTENSION TUBE & KIT

- » 1.2" OD Receiver Extension Tube Compatible with AR15 Lower Receivers
- » Precision Machined from 7075-T6 Aircraft Aluminum with a Dry Film Lube Coated Interior for Smoother and More Reliable Cycling
- » Finished in a Matte Black Type III Class II Hard Coat Anodized Finish
- » Compatible with Standard AR15 Type Buffers and Springs
- » Compatible with Most AR Pistol Receiver Extension Tube Covers

- / Tube Only / 7075-T6 / TLU008
- / Tube Kit / 7075-T6 / TLU008-KIT



**UTG PRO®** 

## AR PISTOL EXTENDED RECEIVER EXTENSION TUBE & KIT

- » Precision Machined from 7075-T6 Aircraft Aluminum with a Dry Film Lube Coated Interior for Smoother and More Reliable Cycling
- » Finished in a Matte Black Type III Class II Hard Coat Anodized Finish
- » Compatible with Standard AR15 Type Buffers and Springs
- » 8.5" Extended Length and Compatible with GEAR HEAD WORKS® TAILHOOK™ MOD 1/1C Brace and or Most AR Pistol Receiver Extension Tube Covers

- / Tube Only / 7075-T6 / TLU009
- / Tube Kit / 7075-T6 / TLU009-KIT



## A2 RECEIVER EXTENSION TUBE KIT

- » Rifle-length Extension Tube Precision Machined from 6061-T6 Aluminum and Finished in a Matte Black Anodization
- » Includes Rifle-length Extension Tube, Buffer, and Spring, A2 Stock Spacer, and Stock Screw

- / Tube Kit / TLT-A2KT



# GRIPS & HAND STOPS

A full-page background image showing two soldiers in tactical gear. The soldier in the foreground is wearing a black cap, sunglasses, and a headset, aiming a rifle. The soldier in the background is also in tactical gear, aiming a rifle. The scene is set outdoors with a wooden wall and a metal door visible.

## A MEANS OF CONTROL

A tailored fit. Pay attention to the details and integrate the rifle with the shooter. Select your ergonomics from an expansive collection of pistol grips and foregrips and configure the finer points with our shooter driven set of UTG® hand stops.





## JUMP TO A SERIES

### PISTOL GRIPS

146

UTG PRO®  Pistol Grips

Ultra Slim Pistol Grip

Combat Sniper Pistol Grip

### VERTICAL GRIPS

147

Ultra Slim Foregrips

Super Slim Aluminum Foregrips

Compact Polymer Foregrips

Aluminum QD Foldable Foregrip

D GRIP®

Ambidextrous Foregrips

### ULTRA SLIM ANGLED FOREGRIPS

148

### HAND STOPS

149

Angled Index Mounts

Ultra Slim Hand Stops

Hand Stop / Barricade Rest

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)







## PISTOL GRIPS

### UTG PRO<sup>®</sup> AMBIDEXTROUS CONTOURED PISTOL GRIPS

- » Compatible with Most Ambidextrous Safety Levers
- » Ergonomic Finger Grooves with Nonslip Textured Grip Serrations Provide a Solid and Repeatable Grip
- » Ergonomic Symmetrical Palm Swells Reduce Fatigue and Improve Handling Comfort
- » Built-in Storage Compartment with Removable End Cap
- » Impact Resistant Polymer Construction

■ / RBUPG01B  
■ / RBUPG01D



### ULTRA SLIM PISTOL GRIP

- » Compatible with Most Ambidextrous Safeties
- » Nonslip Textured Front, Back, and Side to Side Grip Paneling
- » Impact Resistant Matte Black Polymer Construction
- » Built-in Grip Storage with Hinged Floor Plate

/ RBT-APG01B



### AR15 CONTOURED PISTOL GRIP

- » Impact Resistant Matte Black Polymer Construction with Nonslip Rubberized Grip Texturing
- » Ergonomically Contoured Palm Swells, Finger Grooves, and Beavertail Back Strap
- » Built-in Grip Storage with Removable Floor Plate
- » Not Compatible with Ambidextrous Safety Levers

/ RB-TPG172B





# VERTICAL GRIPS

## ULTRA SLIM FOREGRIPS



- » CNC Machined from 6061-T6 Aluminum and Finished in a Matte Black Anodization
- » Mounts Bidirectionally and Features Two Different Ergonomically Serrated Contours to Choose From
- » Lightening Cuts Reduce Overall Weight

**M-LOK® / MT-FGM01X**  
**Picatinny / MT-FGP01X**



## SUPER SLIM ALUMINUM FOREGRIPS

- » Precision Machined from Aircraft Aluminum Finished in a Matte Black Anodization
- » Removable Red and Blue Anodized Inserts for M-LOK® and Keymod Models Adds a Level of Personalization
- » Slim, Lightweight, Ergonomic, with Dehorned Corners and Melted Contours for a Comfortable Support Hand Grip

**M-LOK® / MT-FGM01**  
**Picatinny / MT-FGP01**  
**Keymod / MT-FGK01**



## COMPACT POLYMER FOREGRIP



- » Impact Resistant Matte Black Polymer Construction
- » Nonslip Rubberized Grip Texture
- » Lightweight, Short, and Compact Profile

**M-LOK® / RB-FGM01**



## ALUMINUM QD FOLDABLE FOREGRIP

- » Matte Black Anodized Aluminum Construction
- » Quick Detachable Picatinny Lever Lock Mounting Base
- » Posi-lock Cross Bolt and Spring Tensioned Locking Plate with Steel Insert for a Secure Installation
- » Removable End Cap with Waterproof Storage
- » Ergonomic Knurled Surface
- » US PAT. 8397421, US PAT. 8429843

**Picatinny / MNT-GRP002SQ**



**D GRIP®**  
QUICK RELEASE DEPLOYABLE BIPOD



## D GRIP®

- » Contoured Foregrip with Nonslip and Heat-resistant Rubberized Inlays
- » Ambidextrous Quick Release Deploys Foldable Impact-resistant Bipod Legs Instantly
- » Quickly Transitions from Foregrip to Bipod
- » 5.6" Foregrip Length with an 8.4" Center Height and 65° Open Angle when Bipod is Deployed
- » US PAT. 8397421, US PAT. 9169958
- » EU REG: 002245522-0001, EU REG: 002245522-0002

**Picatinny / MNT-DG02Q**



## AMBIDEXTROUS VERTICAL FOREGRIP

- » Ambidextrous Contoured Finger Grooves and Removable Grip Panels for Pressure Switch Placement
- » Internal Storage Compartment within Grip Core
- » Impact Resistant Polymer Construction

**Picatinny / RB-FGRP168B**



## AMBIDEXTROUS 5 POSITION FOLDABLE FOREGRIP

- » 5-position Foldable with Reinforced Lockup
- » Removable Ambidextrous Grip Panels for Pressure Switch Placement
- » Internal Storage Compartment within Grip Core
- » Impact Resistant Polymer Construction

**Picatinny / RB-FGRP170B**



## AMBIDEXTROUS CONTOURED VERTICAL FOREGRIP

- » Ambidextrous Contoured Finger Grooves and Palm Swell
- » Internal Storage Compartment within Grip Core
- » Impact Resistant Polymer Construction with Nonslip Rubberized Grip Texture

**Picatinny / RB-FGRP172B**







# ANGLED FOREGRIPS

## ULTRA SLIM ANGLED FOREGRIPS

- » 6061-T6 Aluminum Construction Available in Matte Black, Blue, or Red Anodization, and Available for M-LOK®, Keymod, and Picatinny Modular Systems
- » Weight Reduction Lightening Cuts, Ergonomic Contours, and Serrated Front, Bottom, and Rear Faces for Added Grip Retention

### M-LOK®

■ / MT-AFGM01  
■ / MT-AFGM01B  
■ / MT-AFGM01R

### KEYMOD

■ / MT-AFGK01  
■ / MT-AFGK01B  
■ / MT-AFGK01R

### PICATINNY

■ / MT-AFGP01



# HAND STOPS



## ANGLED INDEX MOUNTS

- » Precision Machined from 6061-T6 Aluminum and Finished in a Matte Black, Blue, or Red Anodization
- » Provides an Additional Support Hand Indexing and Retention Point
- » Reversible Design for Installation at the 3 or 9 O'clock Handguard Positions
- » Compatible with the Majority of Octagonal Handguards
- » Thumb Indexing Deck Configurable for Forward or Rearward Cant
- » Spacer Included for Adjusting Clearance with 12 O'clock Mounted Accessories and Pressure Switches
- » US PAT. 10612880

### M-LOK®

■ / TL-TRM01  
■ / TL-TRM01B  
■ / TL-TRM01R

### KEYMOD

■ / TL-TRK01  
■ / TL-TRK01B  
■ / TL-TRK01R

## ULTRA SLIM HAND STOPS

- » 6061-T6 Aluminum Construction Available in Matte Black, Blue, or Red Anodization for M-LOK® or Keymod Modular Systems
- » Weight Reduction Lightening Cuts, Ergonomic Contours, and Serrated Front, Bottom, and Rear Faces for Added Grip Retention

### M-LOK®

■ / TL-HSM01  
■ / TL-HSM01B

### KEYMOD

■ / TL-HSK01  
■ / TL-HSK01B  
■ / TL-HSK01R

## KEYMOD HAND STOP/ BARRICADE REST

- » 6061-T6 Aircraft Aluminum Construction with a Matte Black Finish
- » Compatible with UTG PRO® Super Slim AR15/AK Keymod Handguards
- » Ergonomic Contour Improves Firearm Handling and Speeds Up Transitions

### KEYMOD

■ / TL-HS02B



# MAGAZINES

A close-up photograph of a person's hands holding a black magazine pouch. The pouch is open, revealing three black magazines. The person is wearing a grey long-sleeved shirt. One magazine is partially inserted into a rifle, which is visible at the bottom of the frame. The background is blurred, showing green foliage.

## YOU CAN NEVER HAVE ENOUGH

Having underwent numerous rounds of fully loaded drop testing, live fire testing in the thousands, and reliably holding up to fully automatic rates of fire, Leapers has the steadfast reliability shooters require out of a magazine. Take your preference of windowed or non-windowed glass fiber reinforced construction that has been adverse temperature tested for reliable function before, during, and after.



## JUMP TO A SERIES

### AR POLYMER MAGAZINES

152

5.56 / 10 Round

UTG PRO®  5.56 / 30 Round

5.56 / 30 Round / Windowed **[NEW]**

.308 / 25 Round / Windowed

### AK/AKM POLYMER MAGAZINE

154

7.62X39 / 30 Round / Windowed

### POLYMER MAGAZINES FOR GLOCK

156

9mm / 15 Round

9mm / 17 Round


9mm / 33 Round

9mm / 33 Round / Windowed

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE  
TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]





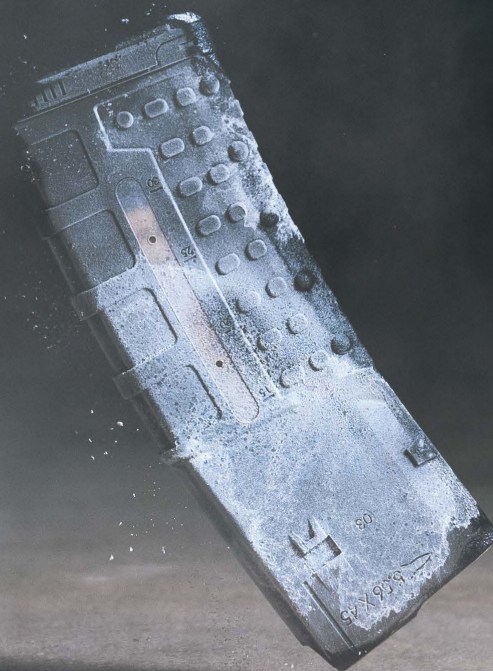

## WEIGHED, MEASURED, AND FOUND WORTHY

Torture tested and benchmarked against the best on the market, UTG® and UTG PRO® magazines take the lead in rugged reliability. All our magazines are made of ultra-durable and impact resistant glass fiber-reinforced polymer injected on world-class Fanuc machines. Frozen and heated to extreme temperatures and drop tested, when competitor magazines start to crack down the back after one or two drops, UTG mags simply refuse to fail. UTG® and UTG PRO®. For whatever tactical competition or training comes next.



# AR POLYMER MAGAZINES

WWW.LEAPERS.COM | SINCE 1992



**UTG PRO®** 

**5.56 | 10 ROUND**  
■ / RBT-AM10

**5.56 | 30 ROUND**  
■ / RBUAM01

**5.56 | 30 ROUND | WINDOWED**  
■ / RBT-AM30  
■ / RBT-AM30D **[NEW]**

**.308 | 25 ROUND | WINDOWED**  
■ / RBT-DM25

## POLYMER MAGAZINES


- » Durable and Impact Resistant Glass Fiber-reinforced Matte Black Polymer Construction
- » High Visibility Blue Anti-tilt follower and High Longevity Stainless Steel Spring for Reliable Feeding
- » Easy Disassembly and Maintenance with Removable Flared Floor Plate
- » US PAT. D849178



Fully Automatic Torture Tested



Drop Tested



Adverse -40°F to 160°F Temperature Tested




Four-way Anti-tilt High Visibility Blue Follower and High Longevity Stainless Steel Spring for Reliable Feeding



Removable Flared Floor Plate



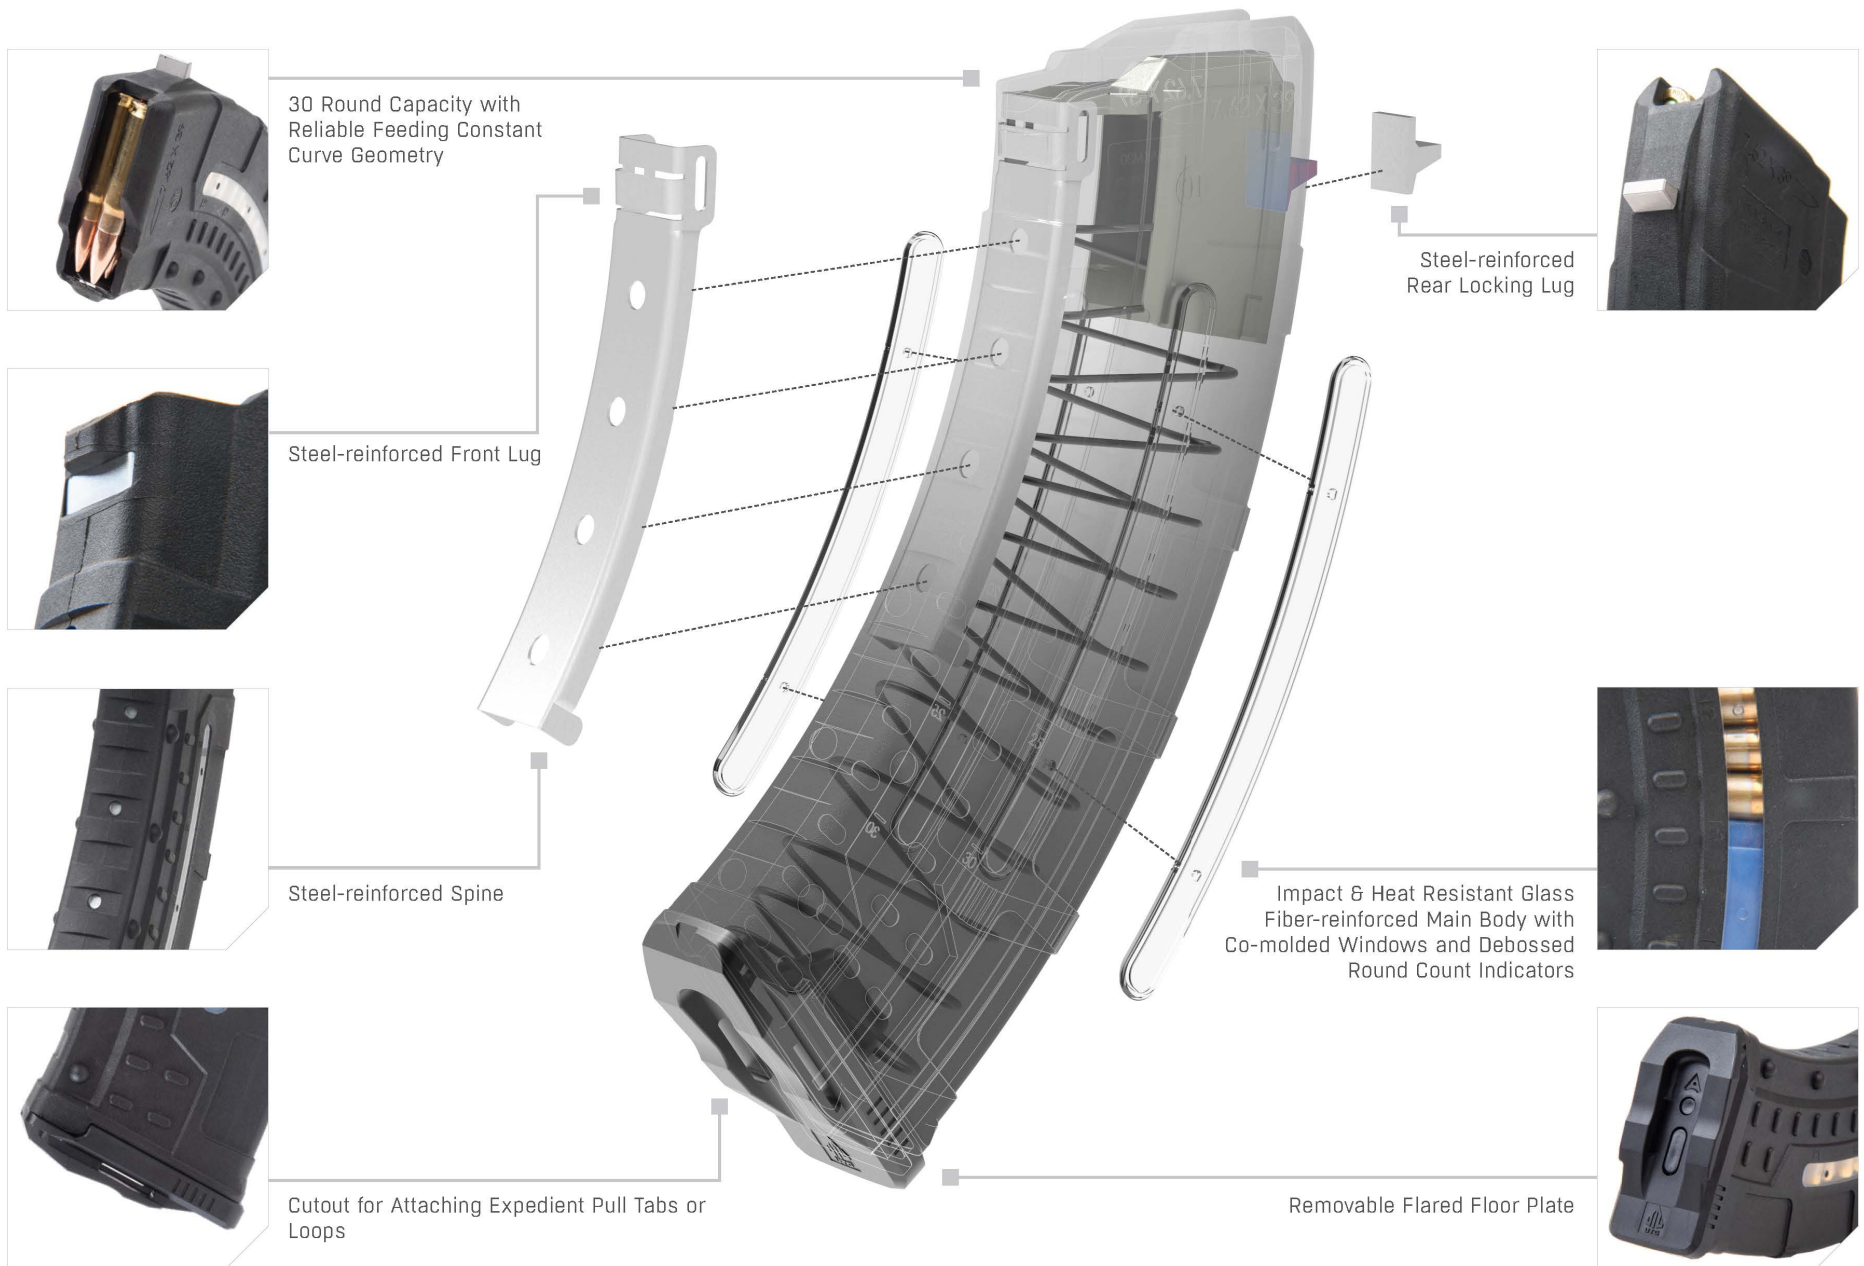

**7.62 X 39 MM | 30 ROUND | WINDOWED**  
/ RBT-AKM30



# AK/AKM WINDOWED POLYMER MAGAZINE



## AK/AKM WINDOWED POLYMER MAGAZINE

- » Durable and Impact Resistant Glass Fiber-reinforced Matte Black Polymer Construction
- » Steel-reinforced Front Lug and Spine and Rear Locking Lug Provides Positive Magazine Retention while Adding Rigidity and Reducing Wear, Extending Service Life
- » High Visibility Blue Anti-tilt follower and High Longevity Stainless Steel Spring for Reliable Feeding
- » Co-molded Windowed 30 Round Capacity Main Body with Debossed Round Count Indicators and Reliable Feeding Constant Curve Geometry
- » Raised Bosses for Added Grip Retention
- » Easy Disassembly and Maintenance with Removable Flared Floor Plate
- » US PAT. D849178

/ RBT-AKM30









# POLYMER MAGAZINES FOR GLOCK®



**9MM | 15 ROUND**

■ / RBT-GL915



**9MM | 17 ROUND**

■ / RBT-GL917



**9MM | 33 ROUND**

■ / RBT-GL933



**9MM | 33 ROUND | WINDOWED**

■ / RBT-PD933

US PAT. D989907

## POLYMER MAGAZINES FOR GLOCK®

- » Durable and Impact Resistant Glass Fiber-reinforced Matte Black Polymer Construction
- » Anti-tilt High Visibility Blue Follower and High Longevity Stainless Steel Spring for Reliable Feeding
- » Left and Right Side Capacity Indicators
- » Easy Disassembly and Maintenance with Removable Flared Floor Plate
- » Compatible with Reversible Magazine Release for Left or Right-handed Users



Drop Tested



Live Fire Torture Tested



Adverse Temperature Tested



High Contrast Blue Anti-tilt Follower



# FLASHLIGHTS & LASERS



## IDENTIFY WITH CERTAINTY

It is critical to positively identify your target and what is behind it and within the immediate area. Assess and proceed accordingly with mounted and handheld solutions or ideally both for the most uncertain of times and situations. Two is one and one is none.



## JUMP TO A SERIES

	<b>UTG PRO®  M-LOK® LIGHT MOUNT FOR MP5®</b>	160
	<b>[NEW]</b>	
	<b>OFFSET LIGHT MOUNTS</b>	160
	<b>LASERS</b>	162
	BULLDOT® Compact Green Laser	
	Compact Green Pistol Laser	
	Compact Red Laser	
	Sub-compact Red Laser	
	<b>WEAPON LIGHTS</b>	163
	Sub-compact Pistol Light	
	Compact Pistol Light	
	Quick Detach Grip Light	
	Polymer Grip Light	
	<b>2-IN-1 LASER/FLASHLIGHT COMBOS</b>	163
	Light/Red Laser Combo	
	Light/Green Laser Combo	
	Sub-compact Light/Red Laser Combo	

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]









# UTG PRO<sup>®</sup> M-LOK<sup>®</sup> LIGHT MOUNT FOR MP5<sup>®</sup>

**UTG PRO<sup>®</sup>**  **NEW**

- » Lightweight Matte Black Anodized 6061-T6 Aluminum Construction
- » Securely Attaches to Front Sight, Does Not Interfere with Handguards or Forearms
- » M-LOK<sup>®</sup> Slots at the 11, 12, and 1 O'clock for Mounting Lights, Pressure Switches, and Other Accessories
- » Compatible with MP5<sup>®</sup> Pistols and Rifles, Not Compatible with K Pattern Receivers
- » U.S. Patents: [www.leapers.com/patents](http://www.leapers.com/patents)



M-LOK<sup>®</sup> Slots at the 11, 12, and 1 O'clock for Mounting Lights, Pressure Switches, and Other Accessories



Compatible with MP5<sup>®</sup> Pistols and Rifles

	MTU058SSM
Length	4.86" (123 mm)
Width	1.56" (40 mm)
Height	0.67" (17 mm)
Weight	1.6 oz (45 g)
M-LOK <sup>®</sup> Slots	5 (Full) / 1 (Half)

## ADDITIONAL ACCESSORIES

### PICATINNY OFFSET RING MOUNT

- » Compatible with 27 mm, 25.4 mm (1"), and 20 mm Flashlight Body Diameters with Use of Included Inserts
- » Matte Black Anodized Aluminum Construction

**PICATINNY / RG-FL138**



### M-LOK<sup>®</sup> / KEYMOD OFFSET RING MOUNTS

- » Snag-free Melted Contours and Dehorned Corners
- » Matte Black Anodized Aluminum Construction
- » Compatible with 27 mm, 25.4 mm (1"), and 20 mm Body Diameters with Use of Included Inserts

**M-LOK<sup>®</sup> / RG-FL27MC**

**KEYMOD / RG-FL27KC**





## LASERS

### COMPACT GREEN PISTOL LASER

- » Fits Flush on Most Compact Pistols
- » Class 3R Bright Green Laser
- » Ambidextrous Momentary/Constant On/Off Switches
- » Matte Black Anodized Aluminum Construction
- » Low Profile Picatinny Mount

/ SCP-LS279S-A



### SUB-COMPACT RED LASER

- » Class 3R Bright Red Laser
- » Programmable for Constant or Pulse Beam
- » Matte Black Anodized Aluminum Construction
- » Sub-compact 1.19" Length
- » Low Profile Picatinny Mount


/ SCP-LS200



### COMPACT RED LASER

- » Precise Windage / Elevation Adjustment
- » Powerful Long Range Beam with Pinpoint Accuracy
- » Pressure Switch and Picatinny Ring Mount Included


/ SCP-LS268

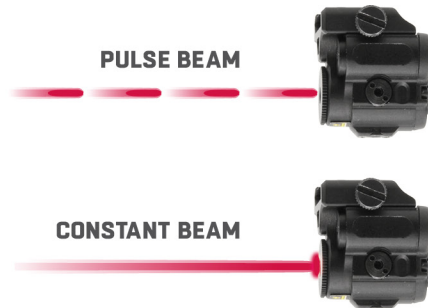

### BULLDOT® COMPACT GREEN LASER

- » Expanding Beam Diameter Increases from 1.45" up to 7.3" at 50 Yards for Faster Target Acquisition at Farther Distances
- » Matte Black Anodized Aluminum Construction
- » Constant On/Off Push Button Tail Cap and Pressure Switch Included

/ SCP-LS289S

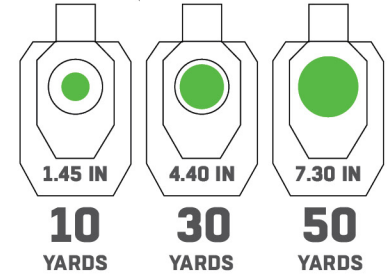

	SCP-LS289S
Mount Type	Low Profile Picatinny Mount
Laser Range	328.1 yds (300 m)
Beam Diameter	1.45" (37 mm) @ 10 yds (9.1 m) 4.40" (112 mm) @ 30 yds (27.4 m) 7.3" (185 mm) @ 50 yds (45.7 m)
Dimensions	3.37" x 1.89" x 1.34" (85.5 x 48 x 34 mm)
Weight	4.35 oz (123 g)
Laser Battery	CR2 x 1

	SCP-LS279S-A	SCP-LS200	SCP-LS268	LT-ELP120R	LT-ELP123R-A	MNT-EL228GPQ-A	LT-ELP38Q-A	LT-ELP39Q-A	LT-ELP28R
Mount Type	Low Profile Picatinny Mount	Low Profile Picatinny Mount	Slide-on Picatinny Ring Mount	Picatinny	Picatinny	Picatinny QD Lever Lock	Picatinny QD Lever Lock	Picatinny QD Lever Lock	Picatinny
Laser Range	546.8 yds (500 m)	546.8 yds (500 m)	546.8 yds (500 m)	N/A	N/A	N/A	546.8 yds (500 m)	546.8 yds (500 m)	164 yds (150 m)
Lumen Output	N/A	N/A	N/A	200 Lumen	400 Lumen	400 Lumen	400 Lumen	400 Lumen	120 Lumen
Focus	N/A	N/A	N/A	Flood	Flood	Wide Angled Flood	Flood	Flood	Flood
Beam Diameter	1.1" (28 mm) @ 16.4 yds (15 m)	1.1" (28 mm) @ 16.4 yds (15 m)	0.6" (16 mm) @ 16.4 yds (15m)	N/A	N/A	N/A	0.63" (16 mm) @16.4 yds (15 m)	0.7" (17.8 mm) @16.4 yds (15 m)	1.1" (28 mm) @16.4 yds (15 m)
Dimensions	2.38" x 1.18" x 1.15" (60.4x 30 x 29.3 mm)	1.19"x 1.27" x 1.28" (30.2 x 32.2 x 32.5 mm)	2.59"x 0.79" (65.8 x 20 mm)	2.98" x 1.12" x 1.13" (75.8 x 28.5 x 28.7 mm)	3.11" x 1.31" x 1.50" (79 x 33.3 x 38 mm)	2.80" x 1.77" x 5.34" (71 x 45.8 x 135.7 mm)	5.12" x 1.92" x 1.27" (130 x 48.8 x 32.3 mm)	5.35" x 2.24" x 1.28" (136 x 56.8 x 32.5 mm)	2.04" x 1.97" x 1.69" (51.8 x 50 x 43 mm)
Weight	2.1 oz (61 g)	1.3 oz (36 g)	1.1 oz (30g)	2.6 oz (73 g)	3.5 oz (100.2 g)	12 oz (340.2 g)	7.3 oz (209 g)	8.6 oz (243 g)	2.9 oz (83 g)
Laser Battery	1/3N x 1	LR48 (AG5) x 4	LR44 x 4	N/A	N/A	N/A	CR123A x 2	CR123A x 2	CR2 x 1
Light Battery	N/A	N/A	N/A	CR2 x 1	CR2 x 1	CR123A x 2	LR44 x 4	CR2 x 1	N/A



# WEAPON LIGHTS

## SUB-COMPACT PISTOL LIGHT

- » Fits Flush on Most Compact Pistols
- » Ambidextrous Momentary/Constant On/Off Switches
- » Flood Focus 200 Lumen Beam
- » Matte Black Anodized Aluminum Construction
- » IPX7 Waterproof Rated

/ LT-ELP120R



## COMPACT PISTOL LIGHT

- » Ambidextrous Momentary/Constant On/Off Switches
- » Rail Inserts Included for Greater Pistol Compatibility
- » Flood Focus 400 Lumen Beam
- » Matte Black Anodized Aluminum Construction

/ LT-ELP123R-A



## QUICK DETACH GRIP LIGHT

- » Momentary/Constant On/Off Push Button
- » Flood Focus 400 Lumen Beam
- » Matte black Anodized Aluminum Construction
- » Picatinny Quick Detach Lever Lock Mount
- » US PAT. 8397421

/ MNT-EL2286PQ-A



# 2-IN-1 LASER/FLASHLIGHT COMBOS

## LIGHT/RED LASER COMBO

- » 400 Lumen Flashlight with 3 Hour Runtime and Dual-function Push-button Momentary On/Off and Constant Twist On/Off Activation
- » Class 3R Type Red Laser with Push-button On/Off and 4-point Retention Erector Return Springs for Reliable Zero Hold
- » Adjustable Rotating Laser Bracket Provides 10 Mounting Positions around the Circumference of the Light
- » Patented Quick-detach Lever Lock Picatinny Mount
- » Flashlight and Laser Pressure Switches Included
- » US PAT. 8397421

 / LT-ELP38Q-A



## LIGHT/GREEN LASER COMBO

- » 400 Lumen Flashlight with 3 Hour Runtime and Dual-function Push-button Momentary On/Off and Constant Twist On/Off Activation
- » Bright Green Laser with Push-button On/Off and 4-point Retention Erector Return Springs for Reliable Zero Hold
- » Adjustable Rotating Laser Bracket Provides 10 Mounting Positions around the Circumference of the Light
- » Patented Quick-detach Lever Lock Picatinny Mount
- » Flashlight and Laser Pressure Switches Included
- » US PAT. 8397421

 / LT-ELP39Q-A



## SUB-COMPACT LIGHT AND RED LASER

- » 120 Lumen Flood Focus Flashlight with Bright Red Laser and 45 Minute Runtime
- » Included Quick-insert Pressure Switch is User Configurable for Simultaneous or Standalone Operation of Light and Laser
- » Integral Weatherproof Plug Replaces Quick-insert Pressure Switch When Not in Use
- » Low Profile Design Mounts Close to Handguard and Bore of Firearm

 / LT-ELP28R





# ACCESSORIES & TOOLS




## UP FOR THE TASK AT HAND

Range bag essentials. Work bench must-haves. Tools of the trade. Try our new M-LOK® to ARCA rails to expand your reach, or find the exact length of rail section or sling swivel size you need. Our section of small odds and ends will round out your rifle to get it feeling and equipped just right.





## JUMP TO A SERIES

	UTG PRO®  M-LOK® ARCA RAILS [NEW]	166
	RAIL SECTIONS & COVERS [NEW]	168
	QD SLING SWIVELS & ADAPTORS	169
	AR ACCESSORIES [NEW]	170
	MUZZLE DEVICES & GAS BLOCKS	171
	CZ SCORPION ACCESSORIES	172
	TOOLS & MAINTENANCE	172

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)







 **UTG<sup>®</sup>**  
**PRO**



# UTG PRO® M-LOK® ARCA RAILS



**3.1" LENGTH**  
/ TLUMA01



**7.9" LENGTH**  
/ TLUMA02



**9.4" LENGTH**  
/ TLUMA03



**14.2" LENGTH**  
/ TLUMA04



## UTG PRO® M-LOK® ARCA RAILS

- » Proudly Designed and Made in USA
- » Contoured to Prevent Snagging and Discomfort When Shooting Unsupported
- » CNC Machined 7075-T6 Aluminum Finished in a Matte Black Anodize
- » M-LOK® Interface Spaced for Installation in Complete Slots or in Between Adjacent Slots
- » Laser Engraved Positional Indicator Markings
- » Forms a Continuous Rail when Multiple Rails are Installed in Line
- » Compatible with Standard ARCA, R-LOCK, and MRAS QD Adaptors and Mounts

	TLUMA01	TLUMA02	TLUMA03	TLUMA04
<b>Length x Width x Height</b>	3.1" x 1.5" x 0.32"	7.9" x 1.5" x 0.32"	9.4" x 1.5" x 0.32"	14.2" x 1.5" x 0.32"
<b>Material</b>	7075-T6 Aluminum	7075-T6 Aluminum	7075-T6 Aluminum	7075-T6 Aluminum
<b>Mount type</b>	M-LOK®	M-LOK®	M-LOK®	M-LOK®
<b>Rail Space Requirement</b>	2 Slots	5 Slots	6 Slots	9 Slots
<b>Weight</b>	1.3 oz	2.6 oz	3.0 oz	4.1 oz





# RAIL SECTIONS & COVERS



## M-LOK® PANEL COVERS **NEW**

- » Lightweight heat-resistant polymer construction
- » Provides added grip and snaps into place without the need for tools
- » Horizontal pass-through underneath each panel for cable management
- » Pack of 6 and compatible with most octagonal profile handguards

Set of 6 / RBT-CMP01



## RUBBERIZED M-LOK® RAIL COVERS

- » 3.15" in Length, Slim, Lightweight, and Securely Installs via Two M-LOK® Screws and Nuts
- » Nonslip Textured Design Provides a Sure Grip Every Time
- » Molded from Durable Impact and Heat Resistant Polymer with a Rubberized Overmold

Set of 4 / RB-HP30M



## M-LOK® ANGLED PICATINNY MOUNT

- » Angled Offset Positions Lights, Optics, or Other Accessories at the 11 or 1 O'clock Positions on Most Handguards
- » Removable Spacer Adjusts Clearance to Fit Various Handguard Profiles
- » Matte Black Anodized Aluminum Construction

/ MT-MP45

## UTG PRO®

### M-LOK® PICATINNY RAIL SECTIONS

- » Proudly Designed and Made in USA
- » Precision CNC Machined 6061-T6 Aluminum Construction Finished in Matte Black Anodize



3-SLOT

/ MTURS10S



7-SLOT

/ MTURS10M



4-SLOT

/ MTURS09S



8-SLOT

/ MTURS09M

### PICATINNY RAIL SECTIONS FOR G36®

- » Precision CNC Machined 6061-T6 Aluminum Construction Finished in Matte Black Anodize
- » Numbered Markings for Quick Reference when Installing or Removing Attachments



## UTG PRO®

13-SLOT X1, 9-SLOT X2

Set of 3 / MTURS11



7-SLOT X2

Set of 2 / MNT-P501



13-SLOT X1, 7-SLOT X2

Set of 3 / MNT-P503



13-SLOT X3

Set of 3 / MNT-P505



# QD SLING SWIVELS & ADAPTORS



## PICATINNY SLING SWIVEL MOUNT WITH 1.25" LOOP

- » Precision Machined Aircraft Aluminum and Steel Construction with a Matte Black Finish
- » Solid Steel 1.25" Sling Loop Compatible with Most Slings on the Market

/ TL-SWMTPO1



## UTG PRO<sup>®</sup> SLING SWIVEL ADAPTORS

- » Precision Machined from 6061-T6 Aircraft Aluminum with a Matte Black Anodization
- » Accepts Any Standard Quick Detach Sling Swivel with 0.37" Diameter Swivel Stud
- » Designed with Quarter Turn Rotational Overtravel Stops to Restrict Swivel Movement

M-LOK<sup>®</sup> / TLUSW001

Keymod / TLUSW002



## ANGLED QD SLING SWIVEL PICATINNY ADAPTOR

- » Accepts Any Standard Quick Detach Sling Swivel with 0.37" Diameter Swivel Stud
- » Precision Machined from Aircraft Aluminum with a Matte Black Finish
- » Low Profile and Lightweight Design with 45° Offset
- » Designed with Quarter-turn Rotational Overtravel Stops to Restrict Swivel Movement


/ TL-SWPM01



## PICATINNY/KEYMOD QD SLING SWIVEL ADAPTOR

- » Compact and Lightweight Design Adaptable for Installation on Both Picatinny or Keymod Rails
- » Accepts Any Standard Quick Detach Sling Swivel with 0.37" Diameter Swivel Stud
- » Precision Machined from Aircraft Aluminum with a Matte Black Finish

/ TL-SWPK01

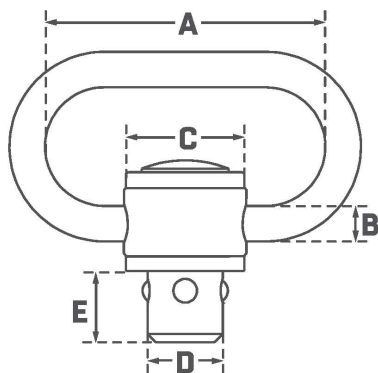

## STEEL QD SLING SWIVELS

- » High Strength Steel Construction with a Matte Black Finish



1.09" LOOP

TL-QDSW08A



1.25" LOOP

TL-QDSW08B



1.29" C-SHAPE LOOP

TL-QDSW08C



1.38" LOOP

TL-QDSW18



1.41" LOOP

TL-QDSW38

	TL-QDSW08A	TL-QDSW08B	TL-QDSW08C	TL-QDSW18	TL-QDSW38
A-Loop Width	1.09"	1.25"	1.29"	1.38"	1.41"
B-Loop Thickness	0.13"	0.13"	0.13"	0.17"	0.18"
C- Push Button Diameter	0.47"	0.47"	0.47"	0.60"	0.64"
D-Stud Diameter	0.37"	0.37"	0.37"	0.37"	0.37"
E-Stud Height	0.35"	0.35"	0.35"	0.37"	0.35"





# AR ACCESSORIES NEW



## OVERSIZED BOLT CATCH

- » Neutrally Justified Upper Bolt Release Paddle is Enlarged, Serrated, and Contoured to Aid Manipulation whether Thumbing or Palming the Bolt Release
- » Partially Enlarged and Angled Outward Lower Bolt Catch to Aid Manipulation and Accessibility
- » Matte Black Steel Construction
- » Includes Detent, Detent Spring, and Roll Pin

■ / TLT-TKSBC-B



## AMBIDEXTROUS MAGAZINE RELEASE

- » Drops into most, if not all, .223/5.56 receivers that accept a mil-spec magazine catch
- » Left and right-side releases contoured to the pad of the finger
- » Low profile prevents inadvertent release and does not interfere with other controls in the manual of arms
- » Matte Black Steel and Aluminum Construction

■ / TLT-TKSMR-B



## AMBIDEXTROUS 60/90 SAFETY SELECTOR

- » User Configurable for 60° or 90° Selector Throw
- » Ergonomic and Reversible Short and Long Selector Levers
- » Matte Black Anodized Aluminum and Steel Construction
- » Installation Hardware, Detent, and Detent Spring Included
- » Compatible with Most Semi-auto Fire Control Groups

■ / TLT-TKSLT-B



## ENHANCED TRIGGER GUARD

- » Enlarged Open Geometry Provides Easier and Safer Access to Trigger Particularly when Wearing Gloves
- » Aluminum Construction Finished in a Matte Black Anodization
- » Includes Installation Tool and Hardware

■ / TLT-TKSTG-B



## ENHANCED FORWARD ASSIST

- » Top edge of forward assist removed to provide more clearance for charging handle manipulation particularly when ambidextrous
- » Face of forward assist is serrated and angled more to rear for easier manipulation whether using the thumb or palm
- » Matte black steel and aluminum construction
- » Installation hardware and spring included

■ / TLT-TKSFA-B

## ENHANCED PIVOT & TAKEDOWN PINS

- » Capped ends with raised rim allow pins to be pulled by hand, cartridge rim, or tool in addition to being pushed
- » Pivot pin slot cut aids in its detent and spring installation
- » Dimpled takedown pin
- » Black manganese phosphate steel construction
- » Includes detents and springs

■ / TLT-TKSTP-B

## OVERSIZED BOLT CATCH

- » Serrated and Oversized Bolt Release and Extended Catch for Easier Reach and Manipulation
- » Steel Construction Finished in Matte Black
- » Includes Installation Hardware

■ / TLT-TKSBC



## AMBIDEXTROUS 45/90 SAFETY SELECTOR

- » Reversible Short and Long Oversized Levers Finished in a Matte Anodization
- » Aluminum and Steel Construction
- » 45° or 90° Throw Configurable
- » Includes Installation Tool, Hardware, Detent, and Detent Spring

■ / TLT-TKSLT  
■ / TLT-TKSLTB  
■ / TLT-TKSLTR



## AMBIDEXTROUS EXTENDED MAGAZINE RELEASE

- » Features Oversized and Extended Left and Right Side Releases for Easier Reach and Manipulation
- » Aluminum and Steel Construction Finished in a Matte Anodization
- » Includes Installation Tool and Hardware

■ / TLT-TKSMR  
■ / TLT-TKSMRB  
■ / TLT-TKSMRR



## OVERSIZED TRIGGER GUARD

- » Enlarged Open Geometry Provides Easier and Safer Access to Trigger Particularly when Wearing Gloves
- » Aluminum Construction Finished in a Matte Anodization
- » Includes Installation Tool and Hardware

■ / TLT-TKSTG  
■ / TLT-TKSTGB  
■ / TLT-TKSTGR



## ENHANCED AR15 LOWER UPGRADE KIT NEW

■ / TLT-TKS02



## AR15 LOWER UPGRADE KIT

■ / TLT-TKS01







### QUICK INSTALL DUST COVER

- » Matte Black Impact and Heat Resistant Polymer Construction with Steel Spring-loaded Detent
- » Patented Tool-free Design Quickly Installs Without Having to Remove The Handguard Prior
- » Compatible with all .223/5.56 Mil-spec and Most Billet Upper Receivers
- » US PAT. 10393467

/ RBT-TKSDC



### AR15 QD RECEIVER END PLATE

- » Quarter-turn Rotational Overtravel Stops Restrict Sling Swivel Movement
- » Steel Construction with Matte Black Finish
- » Compatible with Mil-spec Forged and Most Billet Lower Receivers

/ TL-T6TD03



## MUZZLE DEVICES & GAS BLOCKS

### UTG PRO<sup>®</sup>

#### MUZZLE BRAKES

- » Steel Construction Finished in Black Nitride
- » 1/2"-28 UNEF Thread Compatible, Crush Washer Included
- » Gas Dispersion Porting Reduces Felt Recoil and Muzzle Rise
- » Up to 50% Recoil Reduction



9MM 1/2"X28

/ TLUMD03



.223/5.56 1/2"X28

/ TLUMD01



.223/5.56 1/2"X28

/ TLUMD02

### BLANK FIRING ADAPTOR

- » Durable Reinforced Steel Construction Finished in High Visibility Yellow
- » Compatible with 11.5" - 16" M4 Carbine and AR15 Equipped with A1/A2 Flash Hider

 / MNT-16AD2-C



### MICRO GAS BLOCK

- » Low Profile Gas Block for .750" at The Gas Port
- » Machined from 4140 Steel with Durable Phosphate Finish
- » Includes Gas Tube Roll Pin, Set Screws, and Allen Wrench

/ MNT-ARMGB01







## ACCESSORIES FOR CZ®



### CHARGING HANDLE FOR CZ® SCORPION™ EVO 3

- » Reversible for Left or Right Side Drop-in Installation
- » Extended and Partially Serrated Handle with Dehorned Corners and Melted Contours
- » Steel Guide with 6061-T6 Aluminum Handle Finished in a Matte Black, Red, or Blue Anodization
- » Compatible with Both Pistol and Carbine Models

 / TLT-CSCH01  
 / TLT-CSCH01B  
 / TLT-CSCH01R



### SAFETY SELECTORS FOR CZ® SCORPION™ EVO 3

- » Machined from 6061-T6 Aluminum Finished in a Matte Black, Red, or Blue Anodization
- » Drop-in Installation, No Permanent Modification Required
- » Compatible with Both Pistol and Carbine Models
- » Extended Selectors with Dehorned Corners and Melted Contours
- » Ergonomic Thumb Index for Ease of Manipulating Safety On and Off

 / TLT-CSSLT01  
 / TLT-CSSLT01B  
 / TLT-CSSLT01R

## TOOLS & MAINTENANCE



### .223 BROKEN SHELL EXTRACTOR

- » Removes Broken Shell Casings Lodged in the Chamber
- » Threaded Two-piece Design to Adjust Overall Length
- » Precision Machined from Steel with Matte Black Finish
- » A Handy Must-have Tool for Shooters and Hunters

/ TL-EX223



### .308/7.62X51MM BROKEN SHELL EXTRACTOR

- » Removes Broken Shell Casings Lodged in the Chamber
- » Threaded Two-piece Design to Adjust Overall Length
- » Precision Machined from Steel with Matte Black Finish
- » A Handy Must-have Tool for Shooters and Hunters

/ TL-EX308



### AR15 RECEIVER WEDGE

- » Tightens and Improves Upper to Lower Receiver Fitment

/ RB-A005





### AR15/AR308 ARMORER'S MULTI-FUNCTION COMBO WRENCH

- » Provides the Tools to Install and Remove Parts Often Replaced and or Reinstalled on Both the AR15 and AR308 Platforms such as: Standard A2 Flash Hider, Delta Ring Assembly, Rifle Length Buffer Tube, Castle Nut, and More
- » Steel Construction with Wear Resistant Finish for Long Lasting Durability

/ TL-ARWR01



### MINI AR15 ARMORER'S WRENCH

- » Provides the Tools to Install and Remove Parts Often Replaced and or Reinstalled on the AR15 Platforms such as: Standard A2 Flash Hider, Delta Ring Barrel Nut Assembly, Rifle Length Buffer Tube, Castle Nut, and More
- » Steel Construction with Wear Resistant Finish for Long Lasting Durability

/ TL-ARWR02



### 9MM PISTOL CLEANING KIT

- » Conveniently Stows Away in Any Range Bag in Its Compact Polymer Case (4.63"x2.88"x1.50")
- » Kit Includes an 8-32 Threaded Copper Alloy Cleaning Rod with the Following Threaded Cleaning Accessories: Patch Loop, Bronze and Nylon Brush, and a Cotton Mop

■ / TL-CLP9MMKT



### .223/5.56 CLEANING KIT

- » Includes a 5-piece Extension Steel Cleaning Rod with Adaptor, Patch Loop, Bronze Bore Brush, Chamber Brush, Double-Ended Nylon Utility Brush, ½ oz Oil Bottle, and Cleaning Patches
- » All Parts Conveniently Store within the Included OD Green Nylon Pouch with Belt Loop and ALICE Clip Attachment Point and Featuring Two Hook-and-loop Closure Pockets and External Snap Button Flap

/ TL-A041



### CHAMBER SAFETY FLAG

- » Bright Red for High Visibility and Reliable Confirmation of an Unloaded Firearm
- » Molded from Impact Resistant Polymer with Reinforced Head for Maximum Durability
- » Ideal for Cold Range Use and Mass Produced Firearms

Set of 6 / RB-CSF06



### AK/SKS FRONT SIGHT TOOL

- » An Essential Tool for Making Fine Front Sight Post Windage and Elevation Adjustments
- » Compatible with AK, SKS, MAK, and SLR95 Pattern Rifles

/ SCP-WEA05



### UNIVERSAL SHOTGUN FOREND WRENCH

- » Nickel Plated Steel Construction
- » User Friendly with Ergonomic Handles for Easy Forend Removal and Installation
- » Compatible with REMINGTON® 870™, MOSSBERG® 500A/C, 835, and Other Clones

/ TL-SHWR01



# SOFT GOODS

A black tactical bag, likely a Rapid Deployment Pack, is shown open and lying flat on a wooden surface. A black rifle with a scope is resting on the bag. A person's hand is visible holding the rifle. The background consists of wooden planks and a metal grate.

## PREP FOR ANYTHING

Get your gear in check. Carry your range toys and your work horses with a Rapid Deployment Pack for covert transport or a multitude of gun cases. Store the remainder of your gear in our selection of packs and bags and configure your carry with just the right holster.





## JUMP TO A SERIES

<b>RAPID DEPLOYMENT PACKS</b>	176
Responder Sling Pack	
Rapid Sling Packs	
<b>KEEP-IT-SIMPLE KIS CASES</b>	178
<b>MC CASES</b>	180
<b>RC CASE</b>	181
<b>PISTOL CASES</b>	182
<b>ALL-IN-ONE RANGE/UTILITY GO BAG</b>	184
<b>TRAIL SEEKER, TRAIL CAM BACKPACK</b>	186
<b>OVERBOUND PACK</b>	187
<b>HOLSTERS</b>	188
<b>TACTICAL VESTS</b>	189
<b>LONG GUN SLINGS &amp; BELT</b>	189

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]





# RAPID DEPLOYMENT PACKS



## RESPONDER SLING PACK

- » Front Zipper Pocket Features MOLLE Webbing and Tool Pouch
- » Padded Barrel Catch Keeps Muzzle Secured and Protected During Transportation
- » Quick Deployment Pull Tab for Rapid Deployment
- » Padded Back Panel for Comfortable Carry and Back Support
- » Dual #10 Lockable Zippers

■ / 34 inch / PVC-PSP34B










**RAPID SLING PACKS**

- » Discreet Overall Shape and Appearance
- » Padded Barrel Catch Keeps Muzzle Secured and Protected During Transportation
- » Features Top and Bottom Wraparound Carry Handles and Quick Deployment Pull Tabs
- » Dual #10 Lockable Zippers
- » Removable Padded Center Divider Separates and Protects Firearms when Transporting Two Together

-  / 34 inch / **PVC-PSP34BX**
-  / 30 inch / **PVC-PSP30BN**
-  / 34 inch / **PVC-PSP34BN**
-  / 34 inch / **PVC-PSP34BG**

<i>Black</i> 	<b>PVC-PSP34B</b>	<b>PVC-PSP34BX</b>	-
<i>Black / Navy</i> 	-	<b>PVC-PSP34BN</b>	<b>PVC-PSP30BN</b>
<i>Black / Gray</i> 	-	<b>PVC-PSP34BG</b>	-
<i>Main Compartment Dimensions</i>	34" x 15"	34" x 13"	30" x 12"
<i>Material</i>	Polyester	Polyester	Polyester
<i>Density</i>	12000	9000	9000







# KIS GUN CASES | KEEP-IT-SIMPLE

WWW.LEAPERS.COM | SINCE 1992



38 INCH



28 INCH

## KIS GUN CASES | KEEP-IT-SIMPLE

- » Two Zippered Outer Pockets Store Other Essential Gear, Ammunition, and Paper Targets
- » Features Wall Hanger Loops, Carry Handle, Adjustable Shoulder Strap, Morale Patch Panel
- » Dual #8 Lockable Zippers

38 Inch / PVC-KIS38B2  
28 Inch / PVC-KIS28B

	PVC-KIS38B2	PVC-KIS28B
Main Compartment Dimensions	38" x 11"	28" x 12.5"
Material	Polyester	Polyester
Density	600D	600D





# MC GUN CASES



25 INCH



32 INCH




25 INCH



32/34 INCH



34 INCH

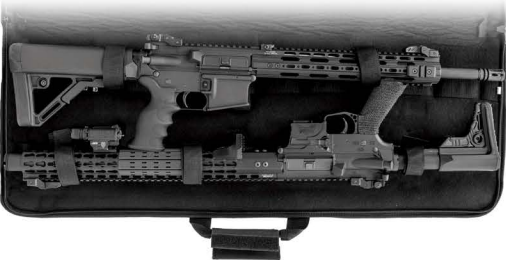

## MC GUN CASES

- » Durable 600D Polyester Construction
- » Padded Main Compartment with User Configurable Retention Straps
- » Outer Compartment Stores Other Essential Gear and Ammunition
- » Features D-ring Wall Hanger, Carry Handle, Adjustable Shoulder Strap, Morale Patch Panel, and Dual #10 Lockable Zipper Closures

34 inch / PVC-MC34B-A  
32 inch / PVC-MC32B-A  
25 inch / PVC-MC25B-A

	PVC-MC34B-A	PVC-MC32B-A	PVC-MC25B-A
Main Compartment Dimensions	34" x 12"	32" x 12"	25" x 12"
Material	Polyester	Polyester	Polyester
Density	600D	600D	600D



# RC GUN CASE



## RC GUN CASE

- » Three Front Detachable MOLLE Pouches Perfect for Magazines, Ammo, and Other Shooting Gear
- » Inner Hook-and-loop Pockets can Store Pistol, Cleaning Equipment, and Targets
- » Secondary Compartment Contains Additional MOLLE Webbing
- » Removable Padded Center Divider
- » Fully Adjustable Hook-and-loop Retention Straps and Padded Corner Pockets
- » Rigid Back Spine for Improved Durability and Shape Integrity
- » Dual #10 Lockable Zippers

42 inch / PVC-RC42B-A

	PVC-RC42B-A
Main Compartment Dimensions	42" x 13"
Material	Polyester
Density	900D





## PISTOL CASES



### COMPETITION SHOOTER'S DOUBLE PISTOL CASE

- » Inside Large Hook-and-loop Panel Complete with 2 Universal Detachable Holsters
- » Padded Center Pouch Provides Pockets of Various Sizes to Store Various Shooting Essentials
- » Exterior Equipped with Two Miscellaneous Pockets with Zippered Closures
- » Additional Hook-and-loop Panel for Attaching Patches
- » Elastic Bands for Pistol Magazines, Flashlights, Suppressors, and Other Equipment
- » Dual #8 Lockable Zippers

11.5 x 9.5 inch / PVC-PC05B





**DOUBLE PISTOL CASE**

- » Fully Padded Interior
- » 6 Universal Magazine Pouches
- » Additional Outer Accessory Pocket
- » Wraparound Carry Handles
- » Dual #10 Lockable Zippers

**13 x 10 inch / PVC-PC02B**



**SINGLE PISTOL CASE**

- » Fully Padded Interior
- » 5 Universal Magazine Pouches
- » Additional Outer Accessory Pocket
- » Wraparound Carry Handles
- » Dual #10 Lockable Zippers

**11 x 8 inch / PVC-PC01B**



**DISCREET HANDGUN CASE**

- » Universal Design Compatible with Most Sub-compact Pistols or Revolvers
- » Padded Construction with Reinforced Double Stitching for Added Durability
- » Integral Spare Magazine Pouch
- » Supported Front and Back Panels for Improved Durability and Shape Integrity
- » Dual #8 Lockable Zippers

**5 x 7 inch / PVC-PC380**

	PVC-PC05B	PVC-PC02B	PVC-PC01B	PVC-PC380
Main Compartment Dimensions	11.5" x 9.5"	13" x 10"	11" x 8"	5" x 7"
Material	Polyester	Polyester	Polyester	Polyester
Density	900D	1680D	1680D	1680D









# ALL-IN-ONE RANGE BAG



8 Removable, Thickly Padded, and Adjustable Internal Dividers,  
2 Removable Pistol Cases, and 1 Brass Bag Included



Open Top with Clear Zippered Pocket  
and Lockable Zipper Closure for Full  
and Easy Access to Main Compartment



Zippered Side Pocket and Retention  
Adjustable Water Bottle Pouch



Thickly Padded Bottom with Four Rubber  
Foot Pads Prevents the Bottom of the Bag  
from Abrasion



Removable Pistol Cases and Brass Bag  
Included; Perfect for Competition and  
Recreation

## ALL-IN-ONE RANGE/UTILITY GO BAG

- » Tough PVC Coated Material, Reinforced Stitching, Heavy Duty Zippers, and Padded Pockets
- » Ample Storage Capacity and Layout Designed to Meet Different Application Demands for Simple Organization
- » Zippered Side Pocket for Ammunition, Magazines, and Other Accessories via 8 Elastic Loops
- » Padded Front and Back Zippered Pockets with MOLLE Webbing
- » Fully Adjustable Shoulder Strap and Wraparound Carry Handles

	PVC-P365B
Dimensions	21" x 9" x 8"
Material	Polyester
Density	600D





## TRAIL SEEKER, TRAIL CAM BACKPACK



	<b>PVC-GC01</b>
<i>Dimensions</i>	14" x 9" x 19"
<i>Material</i>	Polyester
<i>Density</i>	600D
<i>Capacity</i>	28 Liter

### TRAIL SEEKER, TRAIL CAM BACKPACK


- » Durable Water-resistant 600D Polyester Construction with Reinforced Heavy Gauge Stitching and Spiked Rubber Bottom
- » Padded Modular Main Compartment with User-configurable Hook-and-loop Dividers and Shelf Inserts
- » 28 Liter Total Compartmental Capacity Easily Stores Up to 9 Trail Cams
- » Miscellaneous Pouches, Elastic Loops, and Zippered Pockets Provide Ample Storage Space for Other Related Accessories





## OVERBOUND PACK



<i>Gun Metal</i>		<b>PVC-P836GM</b>
<i>Dimensions</i>	12" x 6" x 18"	
<i>Material</i>	Nylon	
<i>Density</i>	600D	
<i>Capacity</i>	28 Liter	

### OVERBOUND PACK

- » Durable 600D Nylon Construction with Reinforced Heavy Gauge Stitching
- » Optimized Space Saving Compartments, Pockets, and Layout Gets You to the Things You Need
- » Modular Outer MOLLE and Hook-and-loop Panels for Attaching Other Gear and Morale Patches
- » Rear Back Panel Compartment Easily Accessible from the Left or Right Side for Quick Storage and Use Items





# HOLSTERS



## UNIVERSAL ANKLE HOLSTER

- » Universal and Ambidextrous
- » Position Adjustable Retention Strap, Extended Muzzle Guard, and Form-fitting Dual layer Elastics for Greater Compatibility Across Most J-frame, Subcompact, and Compact Pistols
- » Synthetic Panel Overlay Guards Against Compression and Unwanted Ingress into the Trigger Guard
- » Adjustable Hook-and-loop Calf and Ankle Straps
- » 11.5" Overall Height with Adjustable Ankle Circumference from 11.5" - 15.5"
- » Calf Circumference from 11.5" - 19"
- » Padded, Breathable, and Reinforced Neoprene Construction
- » Position Adjustable Retention Strap

**Ambidextrous / PVC-H191B**



## HORIZONTAL SHOULDER HOLSTER

- » Universal Fit Compatible with Most Compact to Full Size Pistols
- » Fully Adjustable Design Fits Most Body Types
- » Reinforced Stitching and Seams
- » Inverted Dual Magazine Pouch with Hook-and-loop Closures
- » Holster with Adjustable and Reversible Thumb Break
- » Padded Shoulder Harness
- » Adjustable Straps and Belt Keepers

**Horizontal / Ambidextrous / PVC-H170B**



## IWB BELT HOLSTER

- » Right-handed Inside-the-waistband (IWB) Carry with Elastic Hook-and-loop Release
- » Reinforced Padded Polyester Construction with Steel Belt Clip
- » Fits Belts up to 1.5"
- » Compatible with Most Sub-compact and Micro 9 Pistols

**Right Handed / PVC-H389B**



## AMBIDEXTROUS BELT HOLSTER

- » Universal Design with Open Bottom to Fit a Wider Variety of Compact to Full Size Pistols
- » Adjustable Hook-and-loop and Snap-on Thumb Break Retention Strap

**Ambidextrous / PVC-H288B**



## BELT HOLSTER

- » Designed to Fit most Compact to Full Size Pistols
- » Adjustable Holster Strap Retention with Quick Release Buckle
- » Built-in Magazine Pouch
- » Durable Hook-and-loop Belt Retention Strap

**Right Handed / PVC-H270B**



# 547 LE TACTICAL VESTS



## 547 LE TACTICAL VESTS

- » Breathable Materials & Construction Releases Moisture and Heat
- » Padded Shoulder Pad and Guard Absorbs Recoil and Aids in Consistent Stock Placement
- » Large ID Pouch with Detachable Elastic Shot Shell Carrier
- » Dedicated Communication Pouch
- » 3 Double Stack Pistol Magazine Pouches and 2 Detachable Horizontal Magazine Pouches
- » Single Quick Reload Rifle Magazine Pouch
- » Detachable Right-handed Cross-draw Holster Interchangeable with Included Double Rifle Magazine Pouch
- » Reinforced Drag Handle
- » Heavy Duty Back Panel Webbing for Attaching Additional Gear

**Right Handed / PVC-V547BT**

**Left Handed / PVC-V547BL**

	PVC-V547BT	PVC-V547BL
<i>Adjustable Height</i>	22" - 25"	22" - 25"
<i>Adjustable Girth</i>	40" - 54"	40" - 54"
<i>Adjustable Belt Length</i>	44" - 52"	44" - 52"
<i>Material</i>	Polyester	Polyester
<i>Density</i>	1680D	1680D
<i>Handedness</i>	Right Handed	Left Handed

# LONG GUN SLINGS & BELT



## BOLLA® 2 TO 1 POINT CONVERSION QD SLING

- » Adjustable in Length from 42"-58", Matte Black 1.2" Width Polyester Webbing with Portion of Sling Padded for Comfort
- » Lightweight Steel Slider with Oversized D-ring and Pull Strap Intuitively and Quickly Adjusts Sling Tension by Pulling Forward to Increase Slack and Length and Rearward to Decrease
- » Steel QD Sling Swivels and an Ambi. QD Swivel Housing Easily Converts the Sling from 2 Point to 1 Point Configuration

**Two to One Point / PVC-GB508B**



## QD SLING SWIVEL SINGLE POINT BUNGEE SLING

- » Heavy Duty 1.5" Quick Adjustable Polyester Webbing and Elastic Construction
- » Steel Push Button Quick Detach Sling Swivel Attachment for Quick Installation and Removal
- » Durable Bungee System Reduces Fatigue by Relieving the Felt Weight of the Firearm from the User's Shoulder
- » Inner Length Adjustable from 42" to 58" to Accommodate Various Body Types and Gear

**Single Point / PVC-GB507B**



## UNIVERSAL RIFLE SLING

- » Durable 1.5" Width Webbing with Nonslip Grip Texture Applied to Keep Sling from Unintentionally Shifting
- » Traditional Sling Loops Securely Fasten to a Wide Variety of Different Firearms
- » Adjustable Length from 44" to 52" to Accommodate Various Body Types and Gear

**Two Point / PVC-GB605**



## LAW ENFORCEMENT & SECURITY DUTY BELT

- » Detachable Belt Keepers
- » Hook-and-Loop Adjustment (30" - 52" Waist)
- » Two Horizontal Pistol Magazine Pouches
- » Heavy Duty Quick Release Buckle

**/ PVC-B950-A**



Hook-and-loop Strap Pulls Holster Towards Thigh for a Close-to-body Fit

## SPECIAL OPS TACTICAL THIGH HOLSTERS

- » Fits Most Compact to Full Size Pistols
- » Fully Adjustable Nonslip Leg Strap with Buckle Closure and Cushioned Wraparound Main Body
- » Height Adjustable Belt Strap with Buckle Closure
- » Adjustable Thumb Strap Retention with Quick Release Buckle
- » Built-in Spare Magazine Pouch

**Right Handed / PVC-H178B**

**Left Handed / PVC-H178BL**



# INDEX

[THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE  
TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.]

## A

AIR320MOA.....	076
AIR330MOA.....	076
AIR340MOA.....	076
AIR420MOA.....	076
AIR430MOA.....	076
AIR440MOA.....	076
AIR11834.....	077
AIR11834Q.....	077
AIR11850.....	077
AIR11850Q.....	077
AIR12234.....	077
AIR12250.....	077
AIR12250Q.....	077
AIR31834.....	077
AIR31850.....	077
AIR32234.....	077
AIR32234Q.....	077
AIR32250.....	077
AIR32250Q.....	077
AIR42250.....	077
AIR42270Q.....	077
AQR110.....	078
AQR115.....	078
AQR120.....	078
AQR310.....	078
AQR315.....	078
AQR322.....	078
AQR415.....	078
AQR420.....	078
AQR422.....	078
AQR432.....	078
AS303FA2.....	039
AS403FA2.....	041
AS601FA1.....	037

## F

FCR01.....	105
FCR02.....	103
FLR001.....	105
FLR002.....	103
FUR001.....	103
FUR001.....	105

## I

IX603FA2.....	025
IX603FM1.....	025
IX606FM1.....	029
IX606FM2.....	029
IX645FM1.....	027
IX645FM2.....	027
IX801FA1.....	023
IX801FM3.....	023
IX801SA3.....	023
IXF45SA3.....	031
IXF45SA4.....	031

## L

LT-ELP28R.....	162
LT-ELP38Q-A.....	162
LT-ELP39Q-A.....	162
LT-ELP120R.....	162
LT-ELP123R-A.....	162

## M

MNT-16AD2-C.....	171
MNT-755.....	095
MNT-757.....	095
MNT-914V2.....	085
MNT-955.....	095
MNT-957.....	095
MNT-ARMGB01.....	171
MNT-DG02Q.....	135
MNT-DG02Q.....	147
MNT-DT2PW01.....	083
MNT-DTW145.....	083
MNT-EL228GPQ-A.....	162
MNT-GRP002SQ.....	147
MNT-P501.....	168
MNT-P503.....	168
MNT-P505.....	168
MNT-PMTOWL-A.....	083
MNT-RM700.....	082
MNT-RM700S.....	082
MT-745.....	095
MT-750X.....	097
MT-754X.....	097

MT-759.....	095
MT-945.....	095
MT-950RS03.....	097
MT-950X.....	097
MT-959.....	095
MT-AFGK01.....	149
MT-AFGK01B.....	149
MT-AFGK01R.....	149
MT-AFGM01.....	149
MT-AFGM01B.....	149
MT-AFGM01R.....	149
MT-AFGP01.....	149
MT-FGK01.....	147
MT-FGM01.....	147
MT-FGM01X.....	147
MT-FGP01.....	147
MT-FGP01X.....	147
MT-MB590.....	086
MT-MB590M.....	086
MT-MP45.....	168
MT-RM870.....	086
MT-RMR13C.....	088
MT-RMR45.....	088
MT-RMRAC.....	088
MT-RMRGL.....	089
MT-RMRKIT.....	088
MT-RMRXS.....	088
MT-RSX1L.....	087
MT-RSX1S.....	087
MT-RSX5L.....	087
MT-RSX5S.....	087
MT-RSX7L.....	087
MT-RSX7S.....	087
MT-RSX8L.....	087
MT-RSX8S.....	087
MT-RSX20MOA.....	087
MT-RTF1.....	077
MT-RTF3.....	077
MT-RTF4.....	077
MT-RTR1.....	077
MT-RTR3.....	077
MT-RTR4.....	077
MT-T1AC.....	088
MT-T113C.....	088
MTU001.....	117
MTU001SSM.....	117
MTU001T.....	117
MTU007.....	117
MTU009.....	119
MTU011.....	119
MTU015.....	117
MTU015SSM.....	117
MTU016.....	085
MTU019SSM.....	116
MTU019SSM3.....	116
MTU019SSM3B2.....	116
MTU019SSM3R2.....	116
MTU019SSMB2.....	116
MTU019SSMD.....	116

MTU019SSMR2.....	116
MTU019SSMZ2.....	116
MTU028SG.....	082
MTU029SG.....	082
MTU030T22.....	082
MTU044SEM.....	113
MTU044SPM.....	111
MTU044XLM.....	115
MTU045SEM.....	113
MTU045SPM.....	111
MTU045XLM.....	115
MTU046SEM.....	113
MTU046SPM.....	111
MTU046XLM.....	115
MTU047SEM.....	113
MTU047SPM.....	111
MTU047XLM.....	115
MTU048SEM.....	113
MTU048SPM.....	111
MTU049SEM.....	113
MTU049SPM.....	111
MTU050SSM.....	119
MTU052.....	119
MTU053SSM.....	118
MTU055SSM.....	109
MTU055SSME.....	109
MTU055SSMK.....	109
MTU056.....	081
MTU058SSM.....	161
MT-UAK01.....	084
MTURS09M.....	168
MTURS09S.....	168
MTURS10M.....	168
MTURS10S.....	168
MTURS11.....	168
MT-ZAK01.....	084

## O

OP3-G1563CRWQ.....	053
OP3-GM3124UMOA.....	045
OP3-GM4164UMOA.....	045
OP3-SW080.....	045
OP-DS2018R.....	067
OP-DS2521R.....	067
OP-RDM20CT.....	069
OP-RDM20CTS.....	069
OP-RDM20G.....	069
OP-RDM20R.....	069
OP-RMR20CTS.....	069
OP-RMR20R.....	069
OT-RDM16R.....	069

## P

PVC-B950-A.....	189
PVC-GB507B.....	189
PVC-GB508B.....	189
PVC-GB605.....	189
PVC-GC01.....	186
PVC-H170B.....	188
PVC-H178B.....	189
PVC-H178BL.....	189
PVC-H191B.....	188
PVC-H270B.....	188
PVC-H288B.....	188
PVC-H389B.....	188
PVC-KIS28B.....	179
PVC-KIS38B2.....	179
PVC-MC25B-A.....	180
PVC-MC32B-A.....	180
PVC-MC34B-A.....	180
PVC-P365B.....	185
PVC-P836GM.....	187
PVC-PC01B.....	183
PVC-PC02B.....	183
PVC-PC05B.....	183
PVC-PC380.....	183
PVC-PSP30BN.....	177
PVC-PSP34B.....	177
PVC-PSP34BG.....	177
PVC-PSP34BN.....	177
PVC-PSP34BX.....	177
PVC-RC42B-A.....	181
PVC-V547BL.....	189
PVC-V547BT.....	189

## R

RB-A005.....	172
RB-CSF06.....	173
RB-FGM01.....	147
RB-FGRP168B.....	147
RB-FGRP170B.....	147
RB-FGRP172B.....	147
RB-HP30M.....	168
RB-T6BFH2.....	143
RB-T6BFH3.....	143
RB-T6BFHC.....	143
RB-T308FB.....	142
RB-T469B.....	142
RBT-AKM30.....	154
RBT-AKM30.....	155
RBT-AM10.....	153
RBT-AM30.....	153
RBT-AM30D.....	153
RBT-APG01B.....	146
RBT-CMP01.....	168
RBT-DM25.....	153
RBT-GL915.....	157
RBT-GL917.....	157



RBT-GL933.....	157
RBT-PD933.....	157
RB-TPG172B.....	146
RBT-TKSDC.....	171
RBU6BM.....	141
RBU6DM.....	141
RBU47FS01.....	139
RBU47FS02.....	139
RBUAM01.....	153
RBUPG01B.....	146
RBUPG01D.....	146
RBUS1BM.....	141
RBUS1BMS.....	141
RBUS1DM.....	141
RBUS1DMS.....	141
RBUS2BM.....	141
RBUS2BMS.....	141
RBUS2DM.....	141
RBUS2DMS.....	141
RBUS3BM.....	141
RBUS3BMS.....	141
RBUS3DM.....	141
RBUS3DMS.....	141
RBUS4BM.....	141
RBUS4BMS.....	141
RBUS4DM.....	141
RBUS4DMS.....	141
RBUS5BMS-A.....	142
RDM-20AC.....	088
RDM-20GL.....	089
RDM-20SIG.....	089
RDM-20SW.....	089
RDM-20XSD.....	089
RDM-2045.....	088
RDU012515.....	075
RDU012520.....	075
RDU013010.....	075
RDU013015.....	075
RDU013022.....	075
RG2W1104.....	079
RG2W1154.....	079
RG2W1204.....	079
RG2W3104.....	079
RG2W3154.....	079
RG2W3224.....	079
RG-FL27KC.....	161
RG-FL27MC.....	161
RG-FL138.....	161
RGPM2PA-25H4.....	079
RGPM2PA-25M4.....	079
RGPM2PA-30M4.....	079
RGPM-25H4.....	079
RGPM-25M4.....	079
RGPM-30H4.....	079
RGPM-30M4.....	079
RGPMOFS38-25H4.....	079
RGWM-25H4.....	079
RGWM-25L2.....	079
RGWM-25M4.....	079

RGWM-30H4.....	079
RGWM-30L4.....	079
RGWM-30M4.....	079
RWU012510.....	075
RWU012515.....	075
RWU012520.....	075
RWU013010.....	075
RWU013015.....	075
RWU013022.....	075
RWU013408.....	075
RWU013415.....	075
RWU013420.....	075

## S

SCP3-18IEBG4.....	047
SCP3-274LA0IEW.....	055
SCP3-U416A0IEW.....	047
SCP3-UM312A0IEW.....	047
SCP3-UM416A0IEW.....	047
SCP-27PRGW.....	055
SCP-A1245-A.....	097
SCP-DS3026W.....	071
SCP-DS3039W.....	071
SCP-DS3840TDQ.....	071
SCP-DS3840W.....	071
SCP-ES403.....	047
SCP-ES403.....	051
SCP-LS200.....	162
SCP-LS268.....	162
SCP-LS279S-A.....	162
SCP-LS289S.....	162
SCP-M4CR5WQ.....	053
SCP-M312A0D.....	049
SCP-M312A0WQ.....	049
SCP-M392A0LWQ.....	049
SCP-MF3WEQS.....	071
SCP-RD40RGW-A.....	071
SCP-RG40CDQ.....	071
SCP-SW060B.....	047
SCP-SW080B.....	047
SCP-TDTDQ.....	071
SCP-U394A0IEW.....	051
SCP-U432FD.....	051
SCP-U4164A0IEW.....	051
SCP-U6245A0IEW.....	051
SCP-WEA05.....	173

## T

TL-A041.....	173
TL-ARWR01.....	173
TL-ARWR02.....	173
TL-BP01-B.....	131
TL-BP02-B.....	131
TL-BP03-B.....	131
TL-BP20Q-A.....	135

TL-BP78.....	135
TL-BP78Q.....	135
TL-BP88.....	135
TL-BP88Q.....	135
TL-BP98Q.....	135
TL-BPAD1.....	134
TL-BPAD2.....	127
TL-BPDK01.....	133
TL-BPDM01.....	133
TL-BPDM02.....	133
TL-BPDM03.....	133
TL-BPDM04.....	133
TL-BPFS01-A.....	125
TL-BPFS02Q.....	123
TL-BPFS03Q.....	123
TL-BPM01-B.....	131
TL-BPM02-B.....	131
TL-BPM03-B.....	131
TL-BPOB01-A.....	127
TL-CLP9MMKT.....	173
TL-EX223.....	172
TL-EX308.....	172
TL-HS02B.....	149
TL-HSK01.....	149
TL-HSK01B.....	149
TL-HSK01R.....	149
TL-HSM01.....	149
TL-HSM01B.....	149
TL-M47SR.....	085
TL-QDSW08A.....	169
TL-QDSW08B.....	169
TL-QDSW08C.....	169
TL-QDSW18.....	169
TL-QDSW38.....	169
TL-SHWR01.....	173
TL-SWMTPO1.....	169
TL-SWPK01.....	169
TL-SWPM01.....	169
TL-T6TD03.....	171
TLT-A2KT.....	143
TLT-CSCHO1.....	172
TLT-CSCHO1B.....	172
TLT-CSCHO1R.....	172
TLT-CSSLT01.....	172
TLT-CSSLT01B.....	172
TLT-CSSLT01R.....	172
TL-TRK01.....	149
TL-TRK01B.....	149
TL-TRK01R.....	149
TL-TRM01.....	149
TL-TRM01B.....	149
TL-TRM01R.....	149
TLT-TKS01.....	170
TLT-TKS02.....	170
TLT-TKSBC.....	170
TLT-TKSBC-B.....	170
TLT-TKSFA-B.....	170
TLT-TKSLT.....	170
TLT-TKSLT-B.....	170

TLT-TKSLTB.....	170
TLT-TKSLTR.....	170
TLT-TKSMR.....	170
TLT-TKSMR-B.....	170
TLT-TKSMRB.....	170
TLT-TKSMRR.....	170
TLT-TKSTG.....	170
TLT-TKSTG-B.....	170
TLT-TKSTGB.....	170
TLT-TKSTGR.....	170
TLT-TKSTP-B.....	170
TLU001.....	143
TLU001B.....	143
TLU001D.....	143
TLU001D-KIT.....	143
TLU001-KIT.....	143
TLU001MS.....	143
TLU001R.....	143
TLU001Z.....	143
TLU002.....	143
TLU008.....	143
TLU008-KIT.....	143
TLU009.....	143
TLU009-KIT.....	143
TLUBP01.....	129
TLUBP01M.....	129
TLUBP02-A.....	129
TLUBP02M-A.....	129
TLUFSS5.....	093
TLUMA01.....	167
TLUMA02.....	167
TLUMA03.....	167
TLUMA04.....	167
TLUMD01.....	171
TLUMD02.....	171
TLUMD03.....	171
TLURS001.....	093
TLURS55.....	093
TLUSW001.....	169
TLUSW002.....	169



# LEAPERS®

MICHIGAN USA



**UTG  
PRO**



**ACCUSHOT PRO™**



**INTEGRIX®**

## USA HEADQUARTERS UTG PRO PLANT

**ADDRESS** 32700 CAPITOL STREET,  
LIVONIA, MI 48150, U.S.A.  
**TELEPHONE** + 1 734-542-1500  
**FAX** + 1 734-542-7095  
**EMAIL** [OFFICE@LEAPERS.COM](mailto:OFFICE@LEAPERS.COM)  
**WEBSITE** [WWW.LEAPERS.COM](http://WWW.LEAPERS.COM)

## UTG EUROPE

AM BAHNDAMM 7,  
63683 ORTENBERG, GERMANY  
+ 49 (0) 6041-969686 0  
+ 49 (0) 6041-969686 66  
[INFO@UTGEUROPE.COM](mailto:INFO@UTGEUROPE.COM)  
[WWW.UTGEUROPE.COM](http://WWW.UTGEUROPE.COM)

## UTG CHINA

NO.988 XINGYU ROAD,  
NANTONG, JIANGSU, CHINA  
+ 86 (0) 513 81503888  
+ 86 (0) 513 55880076  
[OFFICE@LEAPERS.COM](mailto:OFFICE@LEAPERS.COM)  
[WWW.UTG.COM.CN](http://WWW.UTG.COM.CN)

## UTG TAIWAN R&D CENTER

NO.36, QUNYI RD., ZHUNAN TOWNSHIP,  
MIAOLI COUNTY 350, TAIWAN (R.O.C.)  
+ 886 (0) 37 580333  
+ 886 (0) 37 580337  
[CONSEIL@UTG-TAIWAN.COM](mailto:CONSEIL@UTG-TAIWAN.COM)  
[WWW.UTGTAIWAN.COM](http://WWW.UTGTAIWAN.COM)



@ LEAPERS\_INC



@ LEAPERS\_INC



@ LEAPERS



@ LEAPERS-INC-



[LEAPERS.COM](http://LEAPERS.COM)