



 **UTG PRO® M-LOK® ARCA RAILS** 7075-T6 Aluminum

Contoured to prevent snagging and discomfort when shooting unsupported.  
 M-LOK® interface spaced for installation in complete slots or in between adjacent slots.  
 Laser engraved positional indicator markings.  
 Forms a continuous rail when multiple rails are installed in line.  
 Compatible with standard ARCA, R-Lock, and MRAS QD adaptors and mounts.

**3.1" LENGTH**

Weight 1.3 oz (37 g) | M-LOK® Slots 1 | Fits into 2 M-LOK® Slots

/TLUMA01



**7.9" LENGTH**

Weight 2.6 oz (74 g) | M-LOK® Slots 3.5 | Fits into 5 M-LOK® Slots

/TLUMA02



**9.4" LENGTH**

Weight 3 oz (85 g) | M-LOK® Slots 4.5 | Fits into 6 M-LOK® Slots

/TLUMA03



**14.2" LENGTH**

Weight 4.1 oz (116 g) | M-LOK® Slots 7.5 | Fits into 9 M-LOK® Slots

/TLUMA04



# PANEL COVERS & RAIL SECTIONS



## UTG® SNAP-IN M-LOK® PANEL COVERS **NEW**

Heat-resistant nonslip textured polymer.  
Compatible with most octagonal profile handguards.  
Cable-management.

Length 1.6" (39.5 mm)  
Width 1.1" (28 mm)  
Weight 0.2 oz (5 g)  
Fits into 1 M-LOK® Slot

**SET OF 6** / RBT - CMP01



## UTG® RUBBERIZED M-LOK® RAIL COVERS

Heat-resistant nonslip textured polymer.  
Compatible with most octagonal profile handguards.

Length 3.15" (80 mm)  
Width 1.03" (26.16 mm)  
Weight 0.5 oz (14.17g)  
Fits into 2 M-LOK® Slot

**SET OF 4** / RB - HP30M



## UTG® M-LOK® ANGLED PICATINNY MOUNT

Angled offset positions accessories at the 11 or 1 o'clock positions.  
Removable spacer adjusts clearance to fit various handguard profiles.

Length 1.6" (40.64 mm)  
Width 0.7" (17.78mm)  
Height 1.3" (33.02mm)  
Weight 1.1 oz (31.2 g)  
6061-T6 Aluminum

**3-SLOT** / MT - MP45

## 🇺🇸 UTG PRO® M-LOK® PICATINNY RAIL SECTIONS



### 3-SLOT

Length 1.57" (40 mm)  
Weight 0.6 oz (17 g)  
6061-T6 Aluminum

/MTURS10S



### 7-SLOT

Length 3.14" (80 mm)  
Weight 1.2 oz (34 g)  
6061-T6 Aluminum

/MTURS10M



### 4-SLOT

Length 1.57" (40 mm)  
Weight 0.56 oz (16 g)  
6061-T6 Aluminum

/MTURS09S



### 8-SLOT

Length 3.14" (80 mm)  
Weight 1.16 oz (33 g)  
6061-T6 Aluminum

/MTURS09M

## 🇺🇸 UTG PRO® PICATINNY RAIL SECTIONS FOR G36®



### SET OF 3

Includes 9-Slot x2, 13-Slot x1  
9-Slot: Length 4.6" (116.8 mm) | Weight 1.5 oz (43 g)  
13-Slot: Length 6" (152.4 mm) | Weight 1.9 oz (54 g)  
6061-T6 Aluminum

/MTURS11

## UTG® PICATINNY RAIL SECTIONS FOR G36®



### SET OF 2

Includes 7-slot x2  
Length 3.87" (98.3 mm)  
Weight 1.27 oz (36 g)  
6061-T6 Aluminum

/MNT - P501



### SET OF 3

Includes 7-Slot x2, 13-slot x1  
7-Slot: Length 6.09" (154.7 mm) | Weight 1.27 oz (36 g)  
13-Slot: Length 3.87" (98.3 mm) | Weight 1.98 oz (56 g)  
6061-T6 Aluminum

/MNT - P503



### SET OF 3

Includes 13-slot x3  
Length 6.09" (154.7 mm)  
Weight 1.98 oz (56 g)  
6061-T6 Aluminum

/MNT - P505



## QD SLING SWIVEL ADAPTORS



### UTG PRO® QD SLING SWIVEL ADAPTORS

Quarter turn rotational stops.  
6061-T6 Aluminum

**M-LOK®** / TLUSW001  
**KEYMOD** / TLUSW002



### UTG® SLING SWIVEL PICATINNY ADAPTOR

Tool-free thumb nut retention.  
1.25" Loop  
Aluminum & Steel

/TL - SWMTP01



### UTG® ANGLED QD SLING SWIVEL PICATINNY ADAPTOR

Quarter turn rotational stops.  
Aluminum

/TL - SWPM01



### UTG® PICATINNY/KEYMOD QD SLING SWIVEL ADAPTOR

Aluminum

/TL - SWPK01

## UTG® STEEL QD SLING SWIVELS



### 1.09" LOOP

Compatible Sling Width 1"  
Loop Thickness 0.13"  
Push Button Diameter 0.47"

/TL - QDSW08A



### 1.25" LOOP

Compatible Sling Width 1.25"  
Loop Thickness 0.13"  
Push Button Diameter 0.47"

/TL - QDSW08B



### 1.29" C-SHAPE LOOP

Compatible Sling Width 1.29"  
Loop Thickness 0.13"  
Push Button Diameter 0.47"

/TL - QDSW08C



### 1.38" LOOP

Compatible Sling Width 1.38"  
Loop Thickness 0.17"  
Push Button Diameter 0.60"

/TL - QDSW18



### 1.41" LOOP

Compatible Sling Width 1.41"  
Loop Thickness 0.18"  
Push Button Diameter 0.64"

/TL - QDSW38



# UTG® AR15 ACCESSORIES

## LOWER UPGRADE ACCESSORIES



**OVERSIZED BOLT CATCH**  
/TLT-TKSBC




**AMBI. 45/90 SAFETY SELECTOR**  
**BLACK** /TLT-TKSLT  
**BLUE** /TLT-TKSLTB  
**RED** /TLT-TKSLTR



**AMBI. EXTENDED MAGAZINE RELEASE**  
**BLACK** /TLT-TKSMR  
**BLUE** /TLT-TKSMRB  
**RED** /TLT-TKSMRR



**OVERSIZED TRIGGER GUARD**  
**BLACK** /TLT-TKSTG  
**BLUE** /TLT-TKSTGB  
**RED** /TLT-TKSTGR

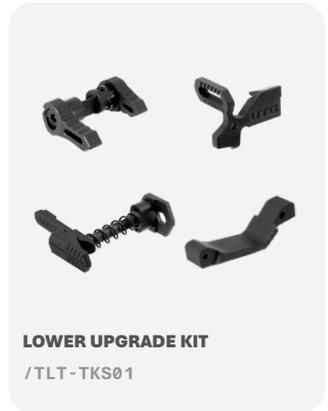

**LOWER UPGRADE KIT**  
/TLT-TKS01

## QUICK INSTALL DUST COVER

Matte black impact and heat resistant polymer construction with steel spring-loaded detent.

Patented tool-free design quickly installs without having to remove the handguard prior.

Compatible with all .223/5.56 mil-spec and most billet upper receivers.

US PAT. 10393467

/RBT-TKSDC



## QD RECEIVER END PLATE

Quarter-turn rotational overtravel stops restrict sling swivel movement.

Steel construction with matte black finish.

Compatible with mil-spec forged and most billet lower receivers.

/TL-T6TD03



# UTG® MUZZLE DEVICES & GAS BLOCK

## MICRO GAS BLOCK

Low profile gas block for .750" at the gas port. Machined from 4140 steel with durable phosphate finish. Includes gas tube roll pin, set screws, and Hex wrench.

/MNT-ARMGB01



## CARBINE BLANK FIRING ADAPTOR

Durable reinforced steel construction finished in high visibility yellow.

Compatible with the 11.5"-16" AR15 and M4 carbine equipped with A1/A2 flash suppressor.

/MNT-16AD2-C



# UTG® ACCESSORIES

## FOR CZ® SCORPION™ EVO 3

### CHARGING HANDLE

Reversible for left or right-side drop-in Installation.  
Extended handle with dehorned corners and melted contours.

- BLACK** / TLT-CSCH01
- BLUE** / TLT-CSCH01B
- RED** / TLT-CSCH01R



### SAFETY SELECTORS

Extended levers with dehorned corners and melted contours.  
Ergonomic thumb safety index for ease of manipulating safety on/off.

- BLACK** / TLT-CSSLT01
- BLUE** / TLT-CSSLT01B
- RED** / TLT-CSSLT01R



# UTG® TOOLS & MAINTENANCE

### BROKEN SHELL EXTRACTOR

Removes broken shell casings from a jammed chamber.  
Threaded two-piece design adjusts overall length to completely engage rim of case mouth.  
Steel construction.

- .223/5.56** / TL-EX223
- .308/7.62 X 51MM** / TL-EX308



### AR15 RECEIVER WEDGE

Improves accuracy and tightens upper to lower receiver fitment.  
Minor trimming may be required for ideal fit.

/ RB-A005



### CHAMBER SAFETY FLAG

High visibility orange for immediate and reliable identification of an empty chamber.  
0.2" (5.1 mm) diameter stem fits most chambers and can be cut down to fit.  
Durable impact-resistant polymer construction.

**SET OF 6** / RB-CSF06



### AK FRONT SIGHT TOOL

Easily makes front sight windage and elevation adjustments.  
Compatible with AK and SKS platforms.  
Steel construction.

/ SCP-WEA05



### UNIVERSAL SHOTGUN FOREND WRENCH

Compatible with Remington® 870™, Mossberg® 500®, 590®, 835®, and clones.  
Nickel plated steel construction.

/ TL-SHWR01



### AR15 CLEANING KIT

Kit includes takedown cleaning rod, bronze bore and chamber brush adaptors, patch adaptor, oil bottle, cleaning patches, and double-sided nylon brush.

Cleaning rod compatible with other 8-32 threaded adaptors.

Storable in A2 stock storage compartment or carried on the belt or web gear via included belt loop and Alice clip.

**.223/5.56** / TL-A041



## STEEL AR15 ARMORER'S WRENCHES



### ARMORER'S WRENCH

Includes flat head screwdriver, 1/2" torque interface, 3/4", 5/8", and 7/8" wrenches in addition to wrenches specific for the USGI barrel nut, YHM® jam nut, UTG Pro super slim barrel nut, castle nut, and a 1 3-prong flash hider.

**AR15/AR308** / TL-ARWR01



### MINI ARMORER'S WRENCH

Includes flat head screwdriver, 1/2" and 3/8" torque interfaces, 3/4" and 5/8" wrenches in addition to wrenches specific for the USGI barrel nut, castle nut, and A1 3-prong flash hider.

**AR15** / TL-ARWR02